



NXC Series AC Contactors

Applicable scope

The new NXC AC contactors feature a novel appearance and a compact structure. They are mainly used for frequent starts and control of AC motors as well as remote circuit making /breaking. They can also be combined with appropriate thermal overload relays to form electromagnetic starters.

Compliant standards: IEC/EN 60947-1, IEC/EN 60947-4-1, IEC/EN 60947-5-1.

Parameters

- Rated operation current Ie: 6A~630A
- Rated operation voltage Ue: 220V~690V
- Rated insulation voltage: 690V (NXC-06M~100), 1000V (NXC-120~630)
- Number of poles: 3P and 4P (only for NXC-06M~16M, NXC-09-12.25.40.50.65.80.95)
- Coil control method: AC (NXC-06(M)~225), DC (NXC-06M~16M), AC/DC (NXC-265~630)
- Installation method: NXC-06M~100 rail and screw installation, NXC-120~630 screw installation

Operation and installation conditions

Type	Operation and installation conditions
Installation class	III
Pollution degree	3
Compliant standards	IEC/EN 60947-1, IEC/EN 60947-4-1, IEC/EN 60947-5-1
Certification mark	CE
Enclosure protection degree	NXC-06M~12M: IP20; NXC-06~38: front IP20(Front Side); NXC-40~100: IP10; NXC-120~630: IP00
Ambient temperature	Operation temperature limits: -35°C ~ +70°C . Normal operation temperature range: -5°C ~ +40°C . The 24-hour average temperature should not exceed +35°C . For use beyond the normal operation temperature range, see "Instructions for use in abnormal conditions" in the annex.
Altitude	Not exceeding 2000 m above sea level
Atmospheric conditions	The relative humidity should not exceed 50% at the upper temperature limit of +70°C . A higher relative humidity is allowed at a lower temperature, e.g. 90% at +20°C . Special precautions should be taken against occasional condensation due to humidity variations.
Installation conditions	The angle between the installation surface and the vertical surface should not exceed ±5°.
Shock and vibration	The product should be installed in places without significant shaking, shock, and vibration.

Type Designation

NXC AC contactor

NXC	-	12	/N	230V	50Hz
↑		↑	↑	↑	↑
Model		Rated current	Special function	Coil voltage	Frequency
		06, 09, 12, 16, 18, 22, 25, 32, 38, 40, 50, 65, 75, 85, 100, 120, 160, 185, 225, 265, 330, 400, 500, 630	/N: Reversible contactor None: Standard contactor	24V, 36V, 42V, 48V, 110V, 120V, 127V, 220V, 230V, 240V, 277V, 380V, 400V, 415V, 440V, 460V, 480V, 525V, 600V, 660V (AC: 06A~225A; AC/DC: 265A~630A)	50Hz, 60Hz, 50/60Hz

Note: 06A-100A products contain one NO auxiliary contact and one NC auxiliary contact; 120A-630A products contain two NO auxiliary contacts and two NC auxiliary contacts

NXC miniature 3P AC contactor

NXC	-	06M	10	/Z	/N	230V	50Hz
Model		Rated current	Auxiliary contact	Coil form	Special function	Coil voltage	Frequency
		06M 09M 12M	10: NO 01: NC	/Z: DC control coil None: AC control coil	/N: Reversible contactor None: Standard contactor	AC: 24V, 36V, 48V, 110V, 127V, 220V, 230V, 240V, 380V, 415V, 440V, DC: 24V, 48V, 110V, 220V	50Hz, 60Hz, 50/60Hz

NXC miniature 4P AC contactor

NXC	-	06M	/22	/N	230V	50Hz
Model		Rated current	4P main contact combination	Special function	Coil voltage	Frequency
		06M 09M 12M	/22: 2 NO and 2 NC main contacts 40or/4: 4 NO main contacts	/N: Reversible contactor None: Standard contactor 4 NO main contacts	AC: 24V, 36V, 48V, 110V, 127V, 220V, 230V,240V, 380V, 415V, 440V,	50Hz, 60Hz, 50/60Hz

Model example: NXC-12 240V 50Hz represents an AC contactor under AC-3 utilization category that provides a rated current of 12A at a main circuit voltage of . Each contactor body contains one NO auxiliary contact and one NC auxiliary contact. The coil control voltage and frequency are AC and 50Hz respectively

NXC 4P AC contactor

NXC	-	06M	/22	/N	230V	50Hz
Model		Rated current	4P main contact combination	Special function	Coil voltage	Frequency
		09M 12M 25M 1Z	/22: 2 NO and 2 NC main contacts 40or/4: 4 NO main contacts	/N: Reversible contactor None: Standard contactor 4 NO main contacts	AC: 24V,110V, 220V, 240V, 380V	50Hz, 60Hz, 50/60Hz

NXC AC contactor selection table

Motor power kW			Maximum operation current A	Number of contacts contained in the contactor body		Contactor model
220V/230V/240V	380V/400V	660V/690V	(AC-3 380V/400V)	NO	NC	
1.5	2.2	3	6	1	0	NXC-06M10
1.5	2.2	3	6	0	1	NXC-06M01
1.5	2.2	3	6	1	1	NXC-06
2.2	4	4	9	1	0	NXC-09M10
2.2	4	4	9	0	1	NXC-09M01
2.2	2	5.5	9	1	1	NXC-09
3	5.5	4	12	1	0	NXC-12M10
3	5.5	4	12	0	1	NXC-12M01
3	7.5	7.5	16	1	0	NXC-16M10
3	7.5	7.5	16	0	1	NXC-16M01
4	7.5	10	18	1	1	NXC-18
5.5	11	11	22	1	1	NXC-22
5.5	11	15	25	1	1	NXC-25
7.5	15	18.5	32	1	1	NXC-32
9	18.5	18.5	38	1	1	NXC-38
11	18.5	30	40	1	1	NXC-40
15	22	37	50	1	1	NXC-50
18.5	30	37	65	1	1	NXC-65
22	37	37	75	1	1	NXC-75
22	37	45	85	1	1	NXC-85
25	45	45	100	1	1	NXC-100
37	55	80	120	2	2	NXC-120
45	75	100	160	2	2	NXC-160
55	90	100	185	2	2	NXC-185
63	110	110	225	2	2	NXC-225
75	132	160	265	2	2	NXC-265
90	160	200	330	2	2	NXC-330
132	200	300	400	2	2	NXC-400
160	250	335	500	2	2	NXC-500
200	335	350	630	2	2	NXC-630

Coil voltage specification table

NXC-06M~16M										
AC (V) 50Hz	24	36	48	110	127	220	230	240	380	415
AC (V) 60Hz	24	36	48	110	127	220	-	-	380	415
DC (V)	24	--	48	110	-	220	-	-	-	-

NXC-06~100	
AC (V) 50Hz	
AC(V) 50/60Hz	24, 36, 42, 48, 110, 120, 127, 220, 230, 240, 277, 380, 400, 415, 440, 460, 480, 525, 600, 660
AC (V) 60Hz	

NXC-120~225										
AC (V) 50Hz	-	-	-	110	127	220	230	240	380	-
AC (V) 60Hz	-	-	-	110	127	220	-	-	380	-

NXC-265~630										
AC/DC (V)	-	-	-	-	110~127	220~240			380~415	-

Parameters

Main circuit parameters and technical performance

Contactor model		NXC-06M	NXC-09M	NXC-12M	NXC-16M	NXC-06	NXC-09	NXC-12	NXC-16	NXC-18	NXC-22	
												
Conventional thermal current Ith (A)		20	20	20	22	20	20	25	25	32	32	
Rated insulation voltage Ui (V)		690										
Rated impulse withstand voltage Uimp (kV)		6					8					
Rated making capacity		Making current: 10×Ie (AC-3) or 12×Ie (AC-4)										
Rated breaking capacity		Breaking current: 8×Ie (AC-3) or 10×Ie (AC-4)										
Rated operation current Ie (A)	220V/230V/240V	AC-1	20	20	20	22	20	20	25	25	32	32
		AC-3	6	9	12	16	6	9	12	16	18	22
		AC-4	6	9	12	16	6	9	12	16	18	22
	380V/400V/415V	AC-3	6	9	12	16	6	9	12	16	18	22
		AC-4	6	9	9	12	6	9	12	12	18	18
	660V/690V	AC-3	3.8	4.9	4.9	6.7	3.8	6.6	8.9	8.9	12	14
AC-4		3.8	4.9	4.9	4.9	3.8	6.6	8.9	8.9	12	12	
Rated control power	AC-3 (kW)	220V/230V/240V	1.5	2.2	3	3	1.5	2.2	3	3	4	5.5
		380V/400V/415V	2.2	4	5.5	7.5	2.2	4	5.5	7.5	7.5	11
		660V/690V	3	4	4	7.5	3	5.5	7.5	7.5	10	11
Electrical life (cycles)		AC-3	1.2×10 ⁶									
Mechanical life (cycles)		1.2×10 ⁷										
Main contact		3 NO, 4 NO, 2 NO+2 NC					3 NO					
Fuse supplied for SCPD		gG20	gG20	gG25	gG25	gG20	gG20	gG25	gG25	gG32	gG32	
Matching thermal overload relay		Model	NXR-12					NXR-25				
Built-in auxiliary contact		3P	1 NO or 1 NC					1 NO+1 NC				
		4P	-									

Control circuit		Contactor model	NXC-06M	NXC-09M	NXC-12M	NXC-16M	NXC-06	NXC-09	NXC-12	NXC-16	NXC-18	NXC-22
Main circuit connection	Cable connection (mm ²)	Prefabricated flexible wire	1	1~2.5				1~4				1.5~6
			2	1~1.5				1~2.5				1.5~4
		Hard wire	1	1~2.5				1~4				1.5~6
			2	1~2.5				1~4				1.5~6
	Size of fastening screw		M3					M3.5				M3.5
Tightening torque (N·m)		0.8					1.2				1.2	
Control circuit connection	Cable connection (mm ²)	Prefabricated flexible wire	1	1~2.5				1~1.5				
			2	1~1.5				1~1.5				
		Hard wire	1	1~2.5				1~1.5				
			2	1~2.5				1~1.5				
	Size of fastening screw		M3					M3.5				
Tightening torque (N·m)		0.8					1.2					

Contactor model		NXC-06M	NXC-09M	NXC-12M	NXC-16M	NXC-06	NXC-09	NXC-12	NXC-16	NXC-18	NXC-22
Coil control power supply	AC 50Hz	24,36,48,110,127,220,230,277,380,400,415,440				24, 36, 42, 48, 110, 120, 127, 220, 230, 240, 277, 380, 400, 415, 440, 460, 480, 525, 600, 660					
	DC	24, 48, 110, 220				-					
Control voltage	Pull-in	(75%~120%) Us				(70% ~ 120%) Us					
	Release	AC: (20%~70%) Us; DC: (10%~70%) Us				(20% ~ 65%) Us					
Coil average power (VA)	Start	≤50(DC≤4.5W)				50~70					
	Hold	≤9(DC≤4.5W)				≤9				≤9.5	
Heat dissipation (W)	AC	1~3				1~3					
	DC	-				-					
Main contact operation time (ms)	ON	10~18				12~40					
	OFF	4~16				4~25					

Contactor model		NXC-25	NXC-32	NXC-38	NXC-40	NXC-50	NXC-65	NXC-75	NXC-85	NXC-100								
																		
Conventional thermal current Ith (A)		40	50	50	60	80	80	90	100	125								
Rated insulation voltage Ui (V)		690																
Rated impulse withstand voltage Uimp (kV)		8																
Rated making capacity		Making current: 10×Ie (AC-3) or 12×Ie (AC-4)																
Rated breaking capacity		Breaking current: 8×Ie (AC-3) or 10×Ie (AC-4)																
Rated operation current Ie (A)	220V/230V/240	AC-1	40	50	50	60	80	80	90	100	125							
		AC-3	25	32	38	40	50	65	75	85	100							
		AC-4	25	32	38	40	50	65	75	85	100							
	380V/400V/415V	AC-3	25	32	38	40	50	65	75	85	100							
		AC-4	25	32	32	40	50	65	75	85	100							
	660V/690V	AC-3	18	22	22	34	39	42	42	49	49							
AC-4		18	22	22	34	39	42	42	49	49								
Rated control power	AC-3 (kW)	220V/230V/240V	5.5	7.5	9	11	15	18.5	22	22	25							
		380V/400V/415V	11	15	18.5	18.5	22	30	37	37	45							
		660V/690V	15	18.5	18.5	30	37	37	37	45	45							
Electrical life (cycles)	AC-3	1.2×10 ⁶			1×10 ⁶			0.8×10 ⁶										
Mechanical life (cycles)	1×10 ⁷			0.9×10 ⁷			0.65×10 ⁷											
Main contact	3 NO																	
Fuse supplied for SCPD	gG40		gG50		gG50		gG63		gG80		gG80		gG100		gG100		gG125	
Matching thermal overload relay	Model	NXR-25		NXR-38		NXR-100												
Built-in auxiliary contact	3P	1NO+1NC			1NO+1NC													
	4P	-																

Control circuit		Contactor model	NXC-25	NXC-32	NXC-38	NXC-40	NXC-50	NXC-65	NXC-75	NXC-85	NXC-100	
Main circuit connection	Cabling (mm ²)	Prefabricated flexible wire	1	1.5~6			6~25			10~50		
			2	1.5~4			4~10			6~25		
	Hard wire	1	1.5~6			6~25			10~50			
		2	1.5~4			4~10			6~25			
Size of fastening screw		M4				M8		M8				
Tightening torque (N·m)		1.85				6		9				
Control circuit connection	Cabling (mm ²)	Prefabricated flexible wire	1	1~1.5								
			2	1~1.5								
	Hard wire	1	1~1.5									
		2	1~1.5									
Size of fastening screw		M3.5										
Tightening torque (N·m)		1.2										

Contactor model		NXC-25	NXC-32	NXC-38	NXC-40	NXC-50	NXC-65	NXC-75	NXC-85	NXC-100
Control voltage	Pull-in	(70%~120%) Us			(75%~120%) Us					
	Release	(20%~65%) Us								
Coil average power (VA)	Start	50~70			160~210			250~300		
	Hold	≤ 14.0			≤ 36.6			≤ 36.6		
Heat dissipation (W)	AC	1~3			4~8			6~10		
	DC									
Main contact action time (ms)	Close	12~40			15~50			-		
	Open	4~25			4~40					


Contactor model		NXC-120	NXC-160	NXC-185	NXC-225	NXC-265	NXC-330	NXC-400	NXC-500	NXC-630	
											
Conventional thermal current Ith (A)		200	200	275	275	315	380	450	630	700	
Rated insulation voltage Ui (V)		1000									
Rated impulse withstand voltage Uimp (kV)		12									
Rated making capacity		Making current: 10×Ie (AC-3) or 12×Ie (AC-4)									
Rated breaking capacity		Breaking current: 8×Ie (AC-3) or 10×Ie (AC-4)									
Rated operation current Ie (A)	220V/230V/240V	AC-3	120	160	185	225	265	330	400	500	630
		AC-4	120	160	160	185	265	330	330	500	500
	380V/400V/415V	AC-3	120	160	185	225	265	330	400	500	630
		AC-4	120	160	160	185	265	330	330	500	500
	660V/690V	AC-3	86	107	107	118	170	235	303	353	400
		AC-4	86	107	107	107	137	170	235	303	353
Rated control power (kW)	AC-3	220V/230V/240V	37	45	55	63	75	90	132	160	200
		380V/400V/415V	55	75	90	110	132	160	200	250	335
		660V/690V	80	100	100	110	160	200	300	335	350
Electrical life (cycles)	AC-3	1.2×10 ⁶					0.8×10 ⁶				
	AC-4	See electrical life curve									
Mechanical life (cycles)		0.6×10 ⁷									
Main contact		3 NO									
Fuse supplied for SCPD		gG224	gG224	gG315	gG315	gG400	gG425	gG500	gG800	gG950	
Matching thermal overload relay		Model	NXR-200			NXR-630					
Built-in auxiliary contact		3P	2 NO+2 NC								
		4P									

Control circuit		Contactor model	NXC-120	NXC-160	NXC-185	NXC-225	NXC-265	NXC-330	NXC-400	NXC-500	NXC-630	
Main circuit connection	Cable connection (mm ²)	Prefabricated flexible wire	1	10~150								
			2	10~75								
		Hard wire	1	10~150				50~240				
			2	10~75				50~240				
Size of fastening screw			M6	M8	M10							
Tightening torque (N·m)			10			14						
Control circuit connection	Cable connection (mm ²)	Prefabricated flexible wire	1	1~4								
			2	1~2.5								
		Hard wire	1	1~4								
			2	1~4								
	Size of fastening screw			M3.5								
	Tightening torque (N·m)			0.8								

Contactor model		NXC-120	NXC-160	NXC-185	NXC-225	NXC-265	NXC-330	NXC-400	NXC-500	NXC-630	
Coil control power supply	AC 50Hz	110, 127, 220, 230, 240, 380, 400, 415, 440					Common for AC and DC: 110V-127V, 220V-240V, 380V-415V				
	DC	-									
Control voltage	Pull-in	(75%~120%)Us				(75%~120%)Us					
	Release	(20%~70%)Us				(10%~70%)Us					
Coil average power (VA)	Start	500			600			800			
	Hold	50			11			11			
Heat dissipation (W)	AC	30~50			3~6			3~7			
	DC	-			3~6			3~7			
Main contact action time (ms)	Close	20~50			30~95			45~100			
	Open	4~25			40~80			60~100			

Accessories

Accessory diagrams

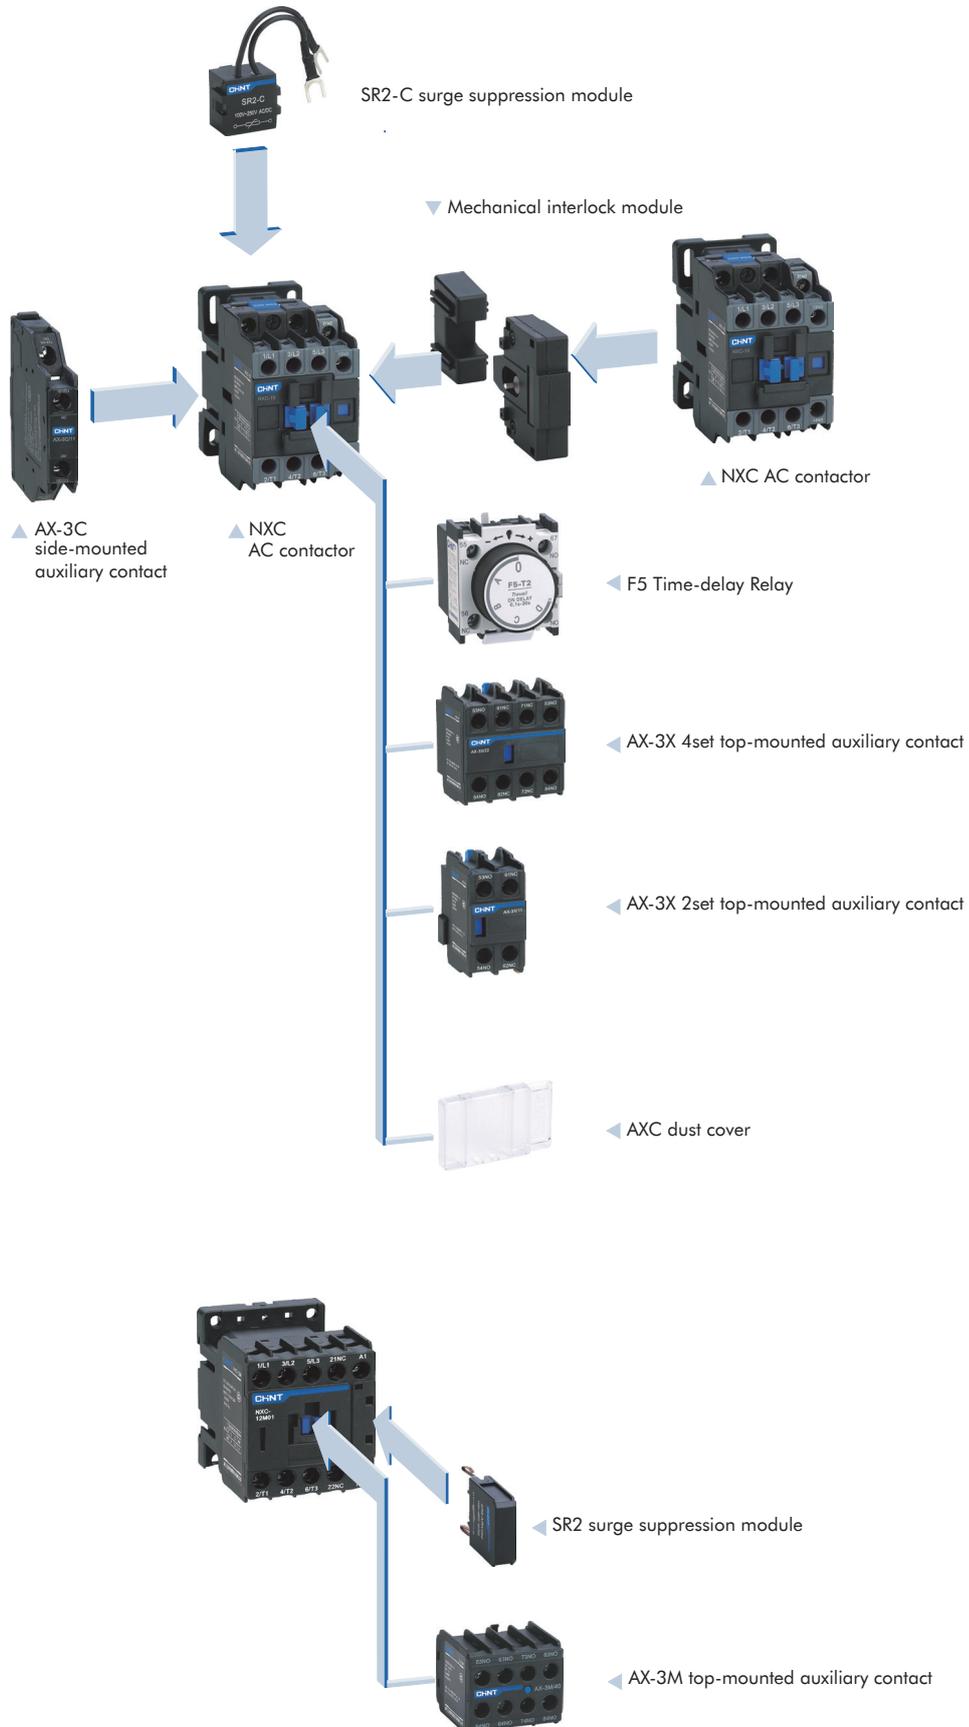

Accessory description

Top-mounted auxiliary contact

AX - 3X / 11	AX - 3M / 11
Auxiliary contact model	Auxiliary contact model
NO and NC auxiliary contact combination	NO and NC auxiliary contact combination
Applicable to 6A-630A AC contactor product	Applicable to NXC-06M ~16M AC contactor product
11, 20, 02 22, 13, 31 04, 40	11, 20, 02 22, 13, 31 04, 40

Side-mounted auxiliary contact

AX - 3C / 11	B
Side-mounted auxiliary contact model	None: Standard model, applicable to 6A~225A AC contactor
NO and NC contact combination	B: Expanded model, applicable to 265A~630A AC contactor
11	

Dust cover

AXC - 1
Dust cover
1: Used for NXC-06~22, NXC-120~630 2: Used for NXC-25~38 3: Used for NXC-40~65 4: Used for NXC-75~100

Time-delay Relay

F5 / T 4
Time-delay Relay model
Delay type
T: On-delay D: Off delay
Delay range
0: 0.1~3s 2: 0.1~30s 4: 10~180s

Accessory selection table (auxiliary contact)

Contactor	Optional accessory	Accessory model	Contact combination	
NXC-06M~16M	AX-3M top-mounted auxiliary contact	AX-3M/20	2NO+0NC	
		AX-3M/11	1NO+1NC	
		AX-3M/02	0NO+2NC	
		AX-3M/40	4NO+0NC	
		AX-3M/31	3NO+1NC	
		AX-3M/22	2NO+2NC	
		AX-3M/13	1NO+3NC	
		AX-3M/04	0NO+4NC	
NXC-06~225	AX-3X top-mounted auxiliary contact	AX-3X/20	2NO+0NC	
		AX-3X/11	1NO+1NC	
		AX-3X/02	0NO+2NC	
		AX-3X/40	4NO+0NC	
		AX-3X/31	3NO+1NC	
		AX-3X/22	2NO+2NC	
		AX-3X/13	1NO+3NC	
		AX-3X/04	0NO+4NC	
		AX-3C side-mounted auxiliary contact	AX-3C/11	1NO+1NC
	NXC-265~630	AX-3X top-mounted auxiliary contact	AX-3X/20	2NO+0NC
AX-3X/11			1NO+1NC	
AX-3X/02			0NO+2NC	
AX-3X/40			4NO+0NC	
AX-3X/31			3NO+1NC	
AX-3X/22			2NO+2NC	
AX-3X/13			1NO+3NC	
AX-3X/04			0NO+4NC	
		AX-3C side-mounted auxiliary contact	AX-3C/11B	1NO+1NC

Accessory selection table (air delay head)

Contactor	Optional accessory	Accessory model	Contact combination	Delay range (s)
NXC series (except for NXC-06M~16M)	F5 air delay head	F5-T0	1NO+1NC	0.1~3
		F5-T2	1NO+1NC	0.1~30
		F5-T4	1NO+1NC	10~180
		F5-D0	1NO+1NC	0.1~3
		F5-D2	1NO+1NC	0.1~30
		F5-D4	1NO+1NC	10~180

Accessory selection table (dust cover)

Contactor	Optional accessory
NXC-06~22, NXC-120~630	AXC-1 dust cover
NXC-25~38	AXC-2 dust cover
NXC-40~65	AXC-3 dust cover
NXC-75~100	AXC-4 dust cover

Main parameters and technical performance indicators of accessories

Item		Main technical parameters		
Rated operation current (V)		To 690		
Rated impulse withstand voltage uimp (kV)		6		
Conventional thermal current Ith (A)		10		
Rated making capacity (A)		Breaking current 10 Ie (AC-15) or Ie (DC-13)		
Short-circuit protection		gG fuse: 10A		
Control capacity	Auxiliary contact	AC-15	220V/230V	2.7A
		DC-13	330V/400V	1.5A
	F5 air delay head	AC-15	660V	0.52A
		DC-13	220V	0.3A
Compliant standards		IEC/EN 60947-5-1		
Product certification		CE		
Enclosure protection degree		IP 20 (front side)		
Cable connection (mm ²)	Flexible wire without cold-pressed terminal	1~4		
		1~4		
	Flexible wire with cold-pressed terminal	1~4		
		1~2.5		
	Hard wire	1~4		
		1~4		
Fastening screw size		M3.5, M3 (AX-3M)		
Tightening torque (N·m)		1.2		

Derivative products




Name	Reversible AC contactor
Reversible AC contactor	

Suitable contactor type	Mechanical interlock type
NXC-06~38	MI-5
NXC-40~65	MI-6
NXC-75~100	MI-7
NXC-120~225	MI-9
NXC-265~630	NCL8-C

Dimensions and installation

NXC-06M~12M





Dimensions and installation

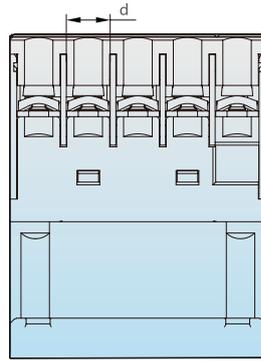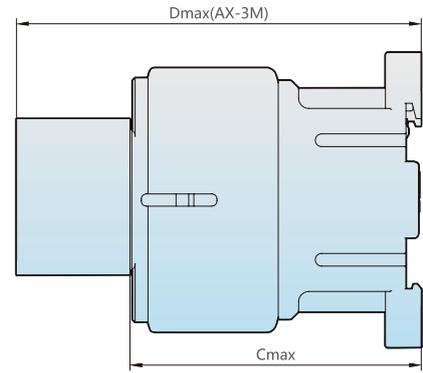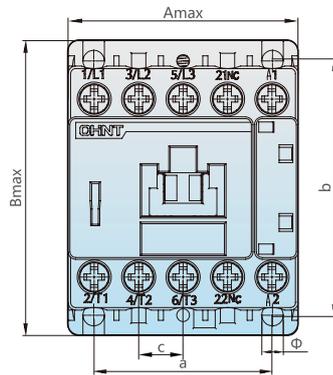

Model	Amax	Bmax	Cmax	Dmax	a	b	c	d	Φ
NXC-06M-16M	46	59	58	94	35±0.35	50±0.48	8.7	7.7	4.2
NXC-06M/4-16M/4	46	59	58	94	35±0.35	50±0.48	8.7	7.7	4.2
NXC-06M/Z-16M/Z	46	59	70	106	35±0.35	50±0.48	8.7	7.7	4.2
NXC-06M/4/Z-16M/4/Z	46	59	70	106	35±0.35	50±0.48	8.7	7.7	4.2


NXC-06~22

Dimensions and installation

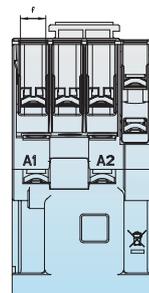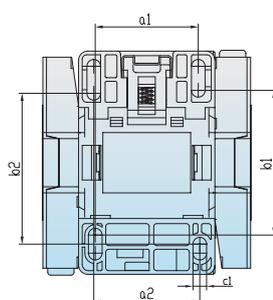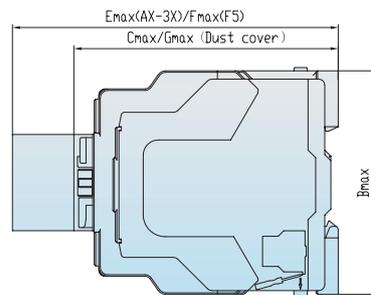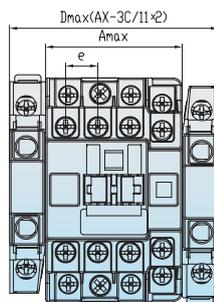


NXC-25~36

Dimensions and installation

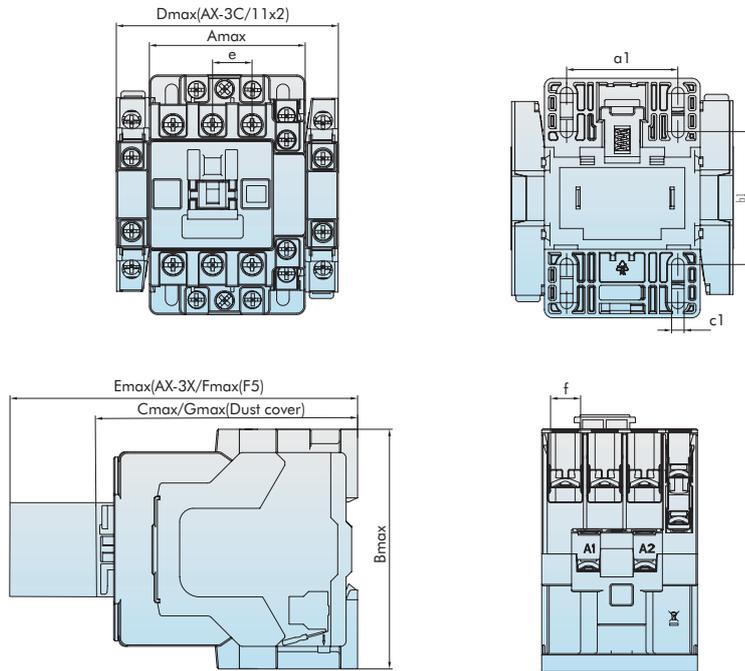

NXC-40~100


Dimensions and installation

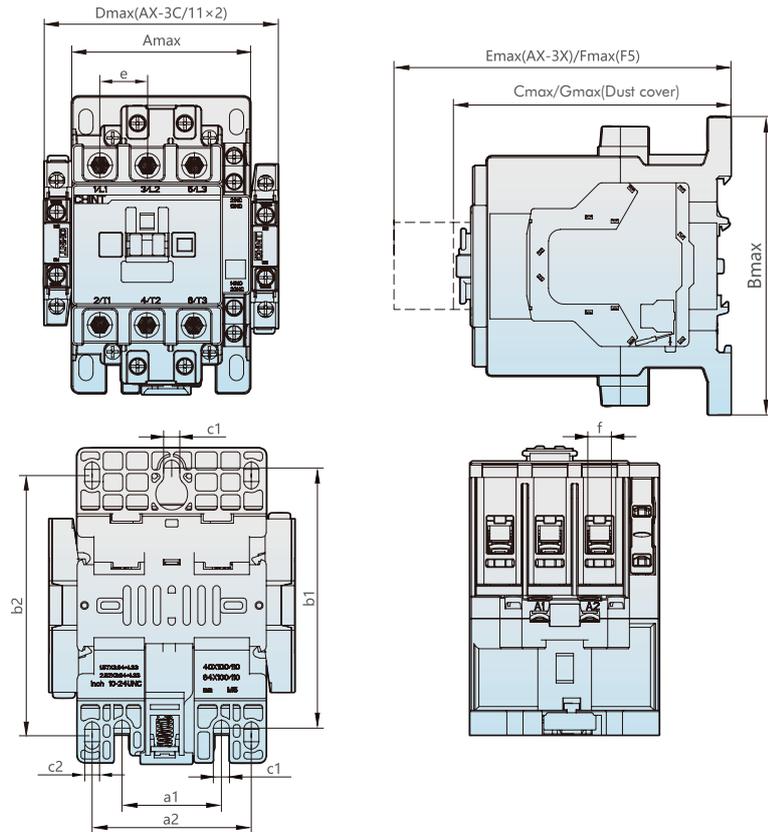

Model	Amax	Bmax	Cmax	Dmax	Emax	Fmax	Gmax	a1	b1	c1	a2	b2	c2	e	f
NXC-06~16	45.5	75	88	70	126.5	146.5	90	34±0.31	48±0.31	Φ4.5	35±0.31	50±0.31	-	10.6	7.8
NXC-18~22	45.5	75	88	70	126.5	146.5	90	34±0.31	48±0.31	Φ4.5	35±0.31	50±0.31	-	11.4	9.2
NXC-25~38	56.5	87	93	81	131.5	151.5	95	40±0.31	48±0.31	Φ4.5	-	-	-	14.2	10.6
NXC-40~65	77	129	118	102	156.5	176.5	121	40±0.28	105±0.57	Φ6.5	64	105	Φ6	20	9.5
NXC-75~100	87	132	127	112	165.5	185.5	129	40±0.28	105±0.57	Φ6.5	74	112	Φ6.2	24	13


NXC-120~225

Dimensions and installation

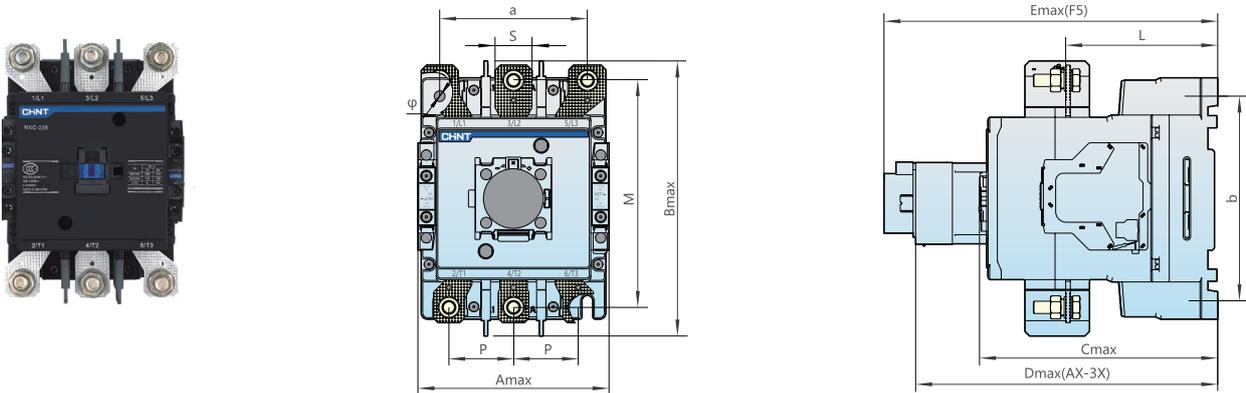


NXC-265~400

Dimensions and installation

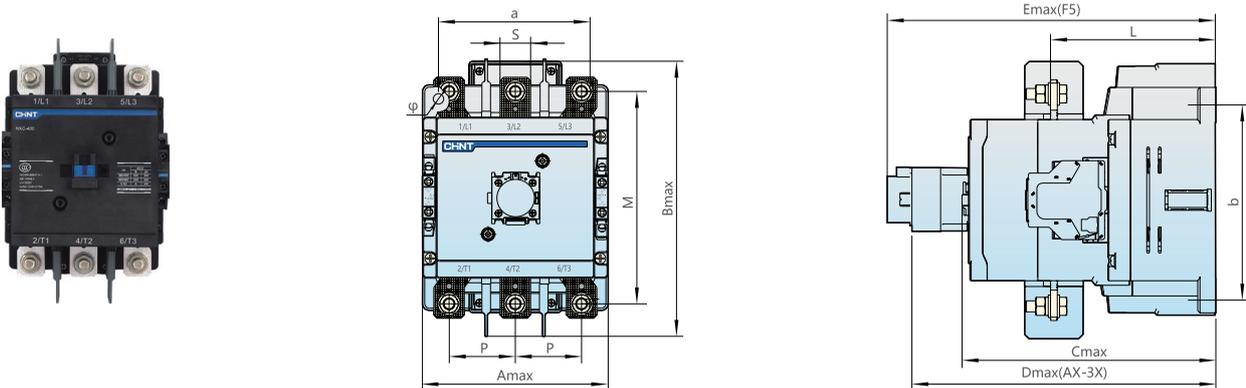

NXC-500~630


Dimensions and installation

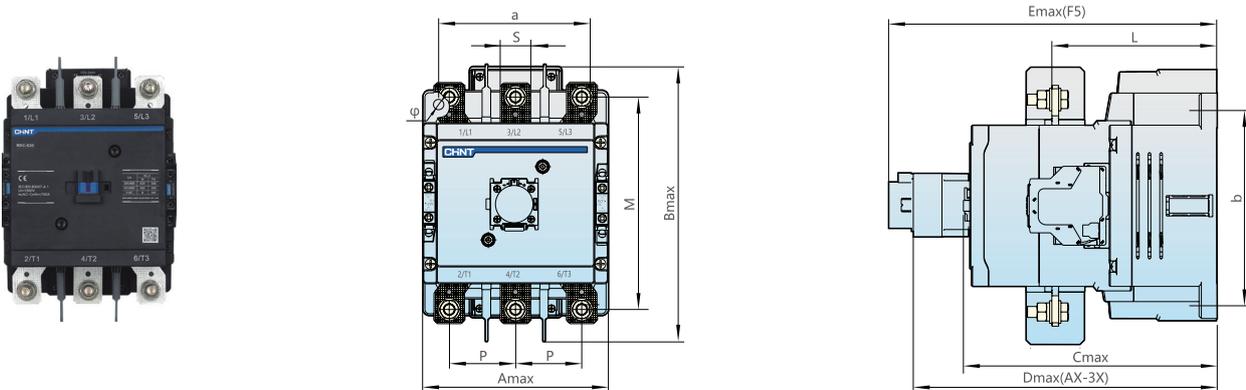


Model	Amax	Bmax	Cmax	Dmax	Emax	a	b	Φ	L	M	P	S
NXC-120-160	127	182	156	196.5	216.5	96±0.5	133.6±0.8	7	99	143	42	20
NXC-185-225	127	182	156	196.5	216.5	96±0.5	133.6±0.8	7	99	155	41	24
NXC-265-400	150	236	207	245.5	265.5	120±0.5	180±0.8	9	134	168	48	25
NXC-500-630	165	248	225	263.5	283.5	130±0.5	180±0.8	9	146	149	58.5	27

Wiring diagrams


NXC-06~100

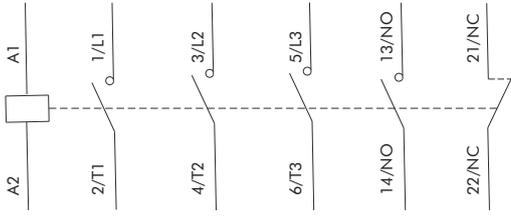


NXC-120~630

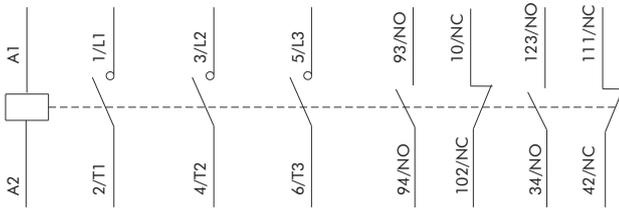


AX-3X/11




AX-3X/20




AX-3X/02




AX-3X/22

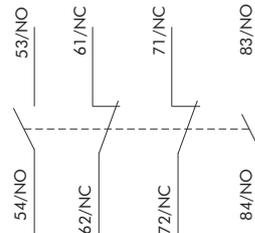


AX-3X/13

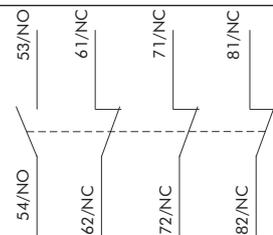


AX-3X/40

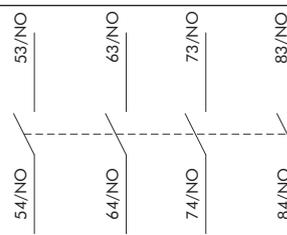


AX-3X/04

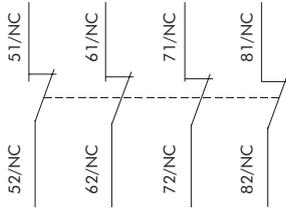


AX-3X/31

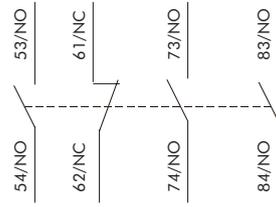


AX-3M/11




AX-3M/20




AX-3M/02




AX-3M/22

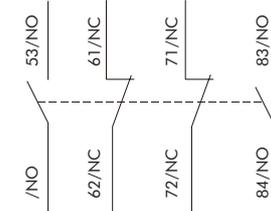


AX-3M/13

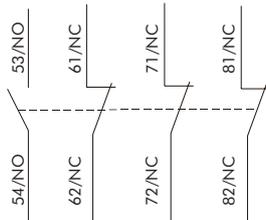


AX-3M/40

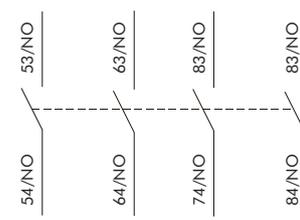

AX-3M/04

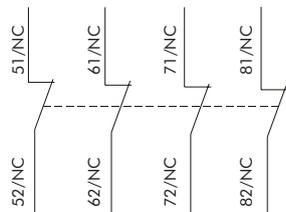

AX-3M/31

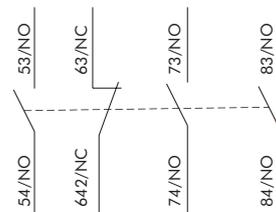

Annex I: Instructions for use in abnormal conditions

Instructions for use of correction factors in high altitude areas

- IEC/EN 60947-4-1 standard defines the relation between altitude and impulse withstand voltage. An altitude of 2000 m above sea level or lower has no significant impact on product performance.
- At an altitude higher than 2000 m, air cooling effect and decrease of rated impulse withstand voltage have to be considered. In this case, design and use of products have to be negotiated by the manufacturer and the user.
- The correction factors for rated impulse withstand voltage and rated operation current for altitudes higher than 2000 m are given in the following table. The rated operation voltage remains unchanged.

Altitude (m)	2000	3000	4000	5000
Rated impulse withstand voltage correction factor	1	0.88	0.78	0.7
Rated operation current correction factor	1	0.92	0.9	0.85

Instructions for use under abnormal ambient temperature

- IEC/EN 60947-4-1 standard defines normal operation temperature range for products. Use of products in the normal range will not cause significant impact on their performance.
- At an operation temperature higher than +40°C, the tolerable temperature rise of products needs to be reduced. Both rated operation current and number of contactors in standard products have to be decreased to prevent product damage, shortened service life, lower reliability, or impact on control voltage. At a temperature lower than -5°C, freezing of insulation and lubrication grease should be considered to prevent action failures. In these cases, design and use of products have to be negotiated by the manufacturer and the user.
- The correction factors for different rated operation current under operation temperature higher than +55°C are given in the following table. The rated operation voltage remains unchanged.

Ambient temperature (°C)	55	60	65	70
Correction factor	1	0.93	0.875	0.75

- At the temperature range of +55°C ~ +70°C, the pull-in voltage range of AC contactors is (90%~110%)Us, (70%~120%)Us and (75%~120%)Us is the results of cold status tests at 40°C ambient temperature.

Instructions for derating during use in corrosive environment

• Impact on metal parts

Chlorine Cl₂, nitrogen dioxide NO₂, hydrogen sulfide H₂S, sulfur dioxide SO₂

Copper: The thickness of copper sulfide coating in chlorine environment will be twice that in normal environment conditions. This is also the case for environments with nitrogen dioxide.

Silver: When used in SO₂ or H₂S environment, the surface of silver or silver coated contacts will become dark due to formation of a silver sulfide coating. This will lead to higher contact temperature rise and may damage to the contacts.

In humid environments where Cl₂ and H₂S coexist, the coating thickness will increase by 7 times. With presence of both H₂S and NO₂, the silver sulfide thickness will increase by 20 times.

• Considerations during product selection

In refinery, steel, paper, artificial fiber (nylon) industry or other industries using sulphur, equipment may experience vulcanization (also called oxidization in some industrial sectors). Equipment installed in machine rooms is not always well protected from oxidization. Short inlets are often used to ensure that the pressure in such rooms is slightly higher than atmospheric pressure, which helps reduce pollutions due to external factor to a certain degree. However, after operation for 5 to 6 years, the equipment still experience rust and oxidization inevitably. Hence in operation environments with corrosive gas, the equipment needs to be used with derating. The derating coefficient relative to the rated value is 0.6 (up to 0.8). This helps reduce rate of accelerated oxidization due to temperature rise.

Instructions for use with parallel poles

- In case of parallel poles, the rated current of such poles needs to be corrected to make up for distribution of long-term unstable current, as shown in the table below:

Number of parallel poles	2	3	4
Correction factor	1.6	2.25	2.8

Annex II: Utilization category description

Different types of power-consuming equipment may have significantly different loading characteristics and current changes during making/breaking, hence they have different requirements for contactors. IEC 60947-1 standard defines contactor utilization categories that are indicated by one or more of the following use conditions:

- Current, indicated with multiples of rated current
- Voltage, indicated with multiples of rated voltage
- Power factor or time constant
- Short-circuit performance
- Selectivity
- Other use conditions (if applicable)

NXC AC contactors mainly include the following categories:

Utilization categories of AC main circuit

AC-1 type

This type is used for AC loads with a power factor higher than or equal to 0.95.

Examples: heating, power distribution.

AC-2 type

This type is used for start reverse braking and inching of slip ring motors.

During closing, the contactor makes a start current that is about 2.5 times motor rated current.

During opening, the contactor must break the start current at a voltage lower than or equal to the main supply voltage.

AC-3 type

This type is used for breaking normally started squirrel cage motors.

During closing, the contactor makes a start current that is about 7 times motor rated current.

During opening, the contactor breaks motor rated current. In this case, the voltage at the contactor wire terminal is about 20% of main supply voltage. The breaking process is not harsh.

Examples: all standard squirrel cage motors such as those in elevator, escalator, conveyance belt, air compressor, pump, mixer, and air conditioner.

AC-4 type

This type is used for reverse braking and inching of squirrel motors and slip ring motors.

The contactor makes a current that is 5 to 7 times rated motor current, and breaks the same current at higher voltage. At lower motor RPMs, the voltage breaking is as harsh as main voltage.

Examples: printing machinery, wire drawing machine, tower crane, crane, metallurgy.

Control circuit utilization categories

DC-13 type

This type of system is used for starting, reverse current braking, and inching of DC shunt excited machines. The duration is equal to or less than 2 ms.

This type is used for switching electromagnetic loads.

AC-15 type


This type is used for switching electromagnetic loads. The pull-in power during closing of electromagnet is higher than 72VA.

Examples: operation coil of switch contactors.

3. Curves


NXC-06~100

Electric life curves (AC-3)

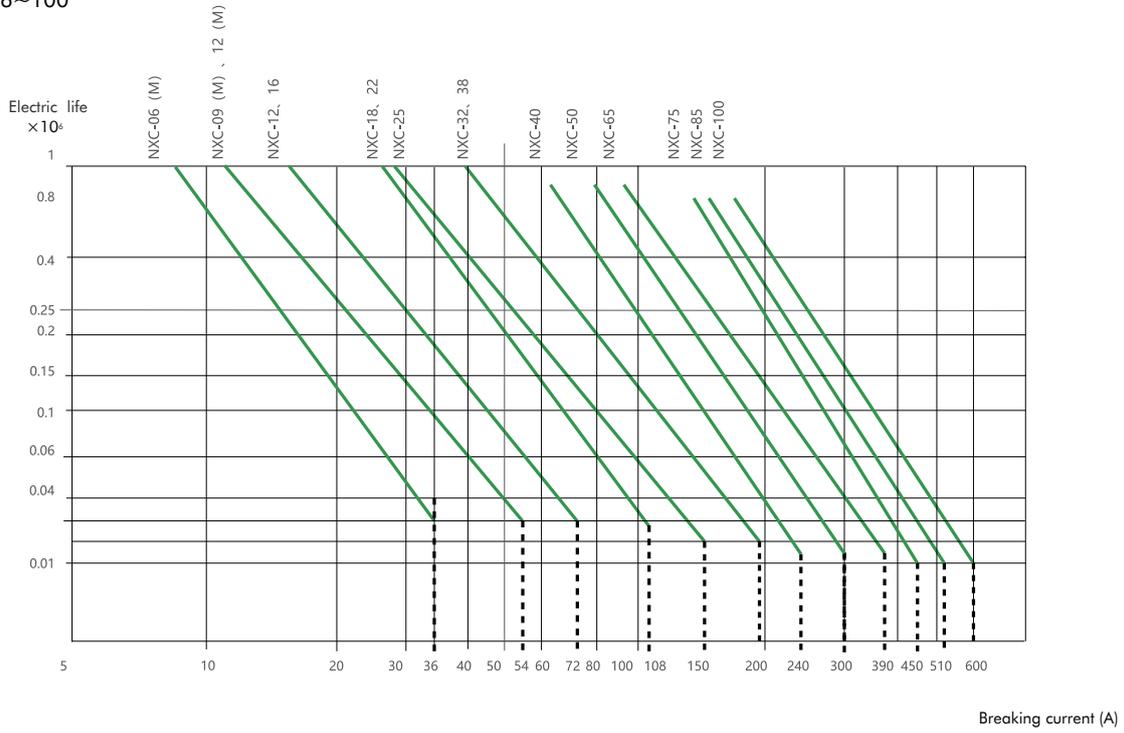

NXC-120~630

Electric life curves (AC-3)

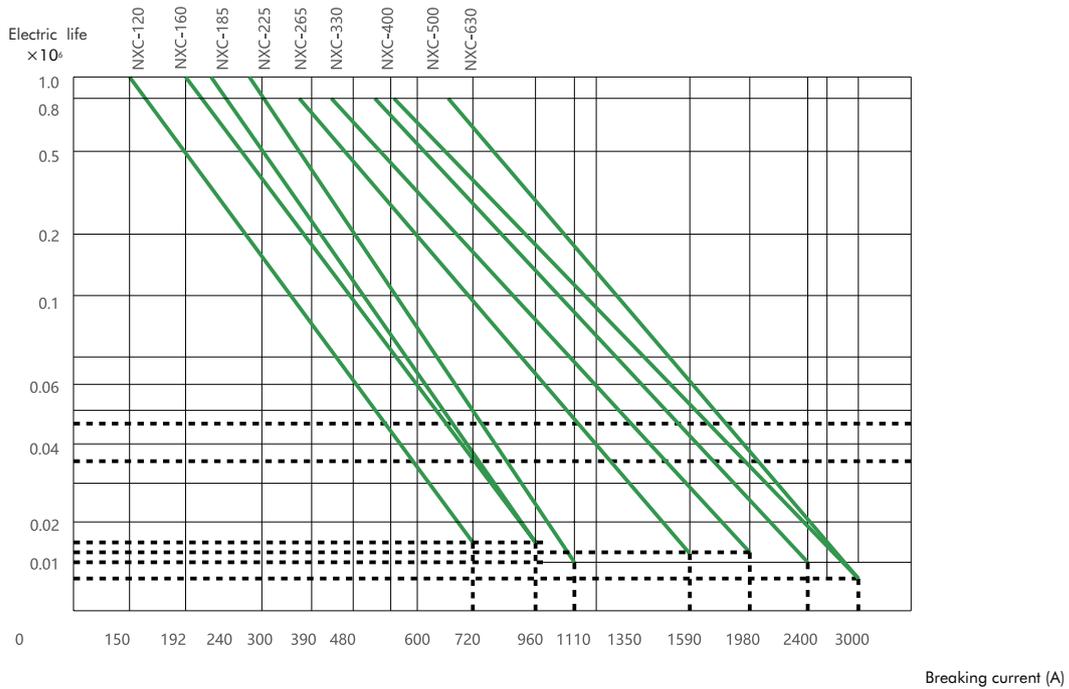

NXC	06	M	01	/	22	/	Z	/	N	220V	50Hz
Product Series	Rated Current (AC-3)	Contactors Type	Auxiliary Contact		Main Contact		Coil Type		Function	Control Voltage	Frequency
	06: 6A 09: 9A 12: 12A 16: 16A 18: 18A 22: 22A 25: 25A 32: 32A 38: 38A 40: 40A 50: 50A 65: 65A 75: 75A 85: 85A 100: 100A 120: 120A 160: 160A 185: 185A 225: 225A 265: 265A 330: 330A 400: 400A 500: 500A 630: 630A	Blank: standard type (6~630A) M: miniature type (6~16A)	Blank: 1NO+1NC (standard type, 6~100A) 2NO+2NC (120~630A) no auxiliary contact (1450~2650A) no auxiliary contact (4P contactor) 01: 1NC (miniature type) 10: 1NO (miniature type)		Blank: 3NO (6~630A) 22: 2NO+2NC (miniature type) 4: 4NO (miniature type)		Blank: standard AC coil Z: standard DC coil (miniature type)		Blank: non-reversing N: reversing	6~225A: 24V: AC24V (6~100A only) 110V: AC110V 127V: AC127V 220V: AC220V 230V: AC230V 240V: AC240V 380V: AC380V 400V: AC400V 415V: AC415V 440V: AC440V DC24V: DC24V (miniature type only) DC48V: DC48V (miniature type only) DC110V: DC110V (miniature type only) DC220V: DC220V (miniature type only) 265~630A: AC/DC 110~127V AC/DC 220~240V AC/DC 380~415V	50Hz 60Hz 50/60Hz

NXC Mini type Contactor 3P (6~16A)

AC-3 Current	Main Contacts	Auxiliary Contacts	Coil	Model Description	Code
6A	3NO	1NC	AC 380V 50/60Hz	NXC-06M01 380V 50/60Hz	836583
6A	3NO	1NC	AC 220V 50/60Hz	NXC-06M01 220V 50/60Hz	836584
6A	3NO	1NC	AC 110V 50/60Hz	NXC-06M01 110V 50/60Hz	836585
6A	3NO	1NC	AC 24V 50/60Hz	NXC-06M01 24V 50/60Hz	836586
6A	3NO	1NC	AC 240V 50/60Hz	NXC-06M01 240V 50/60Hz	956534
6A	3NO	1NC	AC 380V 50/60Hz	NXC-06M01/N 380V 50/60Hz	836631
6A	3NO	1NC	AC 220V 50/60Hz	NXC-06M01/N 220V 50/60Hz	836632
6A	3NO	1NC	AC 110V 50/60Hz	NXC-06M01/N 110V 50/60Hz	836633
6A	3NO	1NC	AC 24V 50/60Hz	NXC-06M01/N 24V 50/60Hz	836634
6A	3NO	1NC	DC 48V	NXC-06M01/Z DC 48V	190576
6A	3NO	1NC	DC 220V	NXC-06M01/Z DC 220V	836664
6A	3NO	1NC	DC 110V	NXC-06M01/Z DC 110V	836665
6A	3NO	1NC	DC 24V	NXC-06M01/Z DC 24V	836666
6A	3NO	1NC	DC 48V	NXC-06M01/Z/N DC 48V	956566
6A	3NO	1NC	DC 220V	NXC-06M01/Z/N DC 220V	956567
6A	3NO	1NC	DC 110V	NXC-06M01/Z/N DC 110V	956568
6A	3NO	1NC	DC 24V	NXC-06M01/Z/N DC 24V	956569
6A	3NO	1NO	AC 380V 50/60Hz	NXC-06M10 380V 50/60Hz	836571
6A	3NO	1NO	AC 230V 50/60Hz	NXC-06M10 230V 50/60Hz	599761
6A	3NO	1NO	AC 220V 50/60Hz	NXC-06M10 220V 50/60Hz	836572
6A	3NO	1NO	AC 110V 50/60Hz	NXC-06M10 110V 50/60Hz	836573
6A	3NO	1NO	AC 24V 50/60Hz	NXC-06M10 24V 50/60Hz	836574
6A	3NO	1NO	AC 240V 50/60Hz	NXC-06M10 240V 50/60Hz	956531
6A	3NO	1NO	AC 380V 50/60Hz	NXC-06M10/N 380V 50/60Hz	836619
6A	3NO	1NO	AC 220V 50/60Hz	NXC-06M10/N 220V 50/60Hz	836620
6A	3NO	1NO	AC 110V 50/60Hz	NXC-06M10/N 110V 50/60Hz	836621
6A	3NO	1NO	AC 24V 50/60Hz	NXC-06M10/N 24V 50/60Hz	836622
6A	3NO	1NO	DC 48V	NXC-06M10/Z DC 48V	190573
6A	3NO	1NO	DC 220V	NXC-06M10/Z DC 220V	836655
6A	3NO	1NO	DC 110V	NXC-06M10/Z DC 110V	836656
6A	3NO	1NO	DC 24V	NXC-06M10/Z DC 24V	836657
6A	3NO	1NO	DC 48V	NXC-06M10/Z/N DC 48V	956554
6A	3NO	1NO	DC 220V	NXC-06M10/Z/N DC 220V	956555
6A	3NO	1NO	DC 110V	NXC-06M10/Z/N DC 110V	956556
6A	3NO	1NO	DC 24V	NXC-06M10/Z/N DC 24V	956557

AC-3 Current	Main Contacts	Auxiliary Contacts	Coil	Model Description	Code
9A	3NO	1NC	AC 380V 50/60Hz	NXC-09M01 380V 50/60Hz	836587
9A	3NO	1NC	AC 230V 50/60Hz	NXC-09M01 230V 50/60Hz	599763
9A	3NO	1NC	AC 220V 50/60Hz	NXC-09M01 220V 50/60Hz	836588
9A	3NO	1NC	AC 110V 50/60Hz	NXC-09M01 110V 50/60Hz	836589
9A	3NO	1NC	AC 24V 50/60Hz	NXC-09M01 24V 50/60Hz	836590
9A	3NO	1NC	AC 240V 50/60Hz	NXC-09M01 240V 50/60Hz	956535
9A	3NO	1NC	AC 380V 50/60Hz	NXC-09M01/N 380V 50/60Hz	836635
9A	3NO	1NC	AC 220V 50/60Hz	NXC-09M01/N 220V 50/60Hz	836636
9A	3NO	1NC	AC 110V 50/60Hz	NXC-09M01/N 110V 50/60Hz	836637
9A	3NO	1NC	AC 24V 50/60Hz	NXC-09M01/N 24V 50/60Hz	836638
9A	3NO	1NC	DC 48V	NXC-09M01/Z DC 48V	190577
9A	3NO	1NC	DC 220V	NXC-09M01/Z DC 220V	836667
9A	3NO	1NC	DC 110V	NXC-09M01/Z DC 110V	836668
9A	3NO	1NC	DC 24V	NXC-09M01/Z DC 24V	836669
9A	3NO	1NC	DC 48V	NXC-09M01/Z/N DC 48V	956570
9A	3NO	1NC	DC 220V	NXC-09M01/Z/N DC 220V	956571
9A	3NO	1NC	DC 110V	NXC-09M01/Z/N DC 110V	956572
9A	3NO	1NC	DC 24V	NXC-09M01/Z/N DC 24V	956573
9A	3NO	1NO	AC 415V 50/60Hz	NXC-09M10 415V 50/60Hz	219890
9A	3NO	1NO	AC 380V 50/60Hz	NXC-09M10 380V 50/60Hz	836575
9A	3NO	1NO	AC 220V 50/60Hz	NXC-09M10 220V 50/60Hz	836576
9A	3NO	1NO	AC 110V 50/60Hz	NXC-09M10 110V 50/60Hz	836577
9A	3NO	1NO	AC 24V 50/60Hz	NXC-09M10 24V 50/60Hz	836578
9A	3NO	1NO	AC 240V 50/60Hz	NXC-09M10 240V 50/60Hz	956532
9A	3NO	1NO	AC 380V 50/60Hz	NXC-09M10/N 380V 50/60Hz	836623
9A	3NO	1NO	AC 220V 50/60Hz	NXC-09M10/N 220V 50/60Hz	836624
9A	3NO	1NO	AC 110V 50/60Hz	NXC-09M10/N 110V 50/60Hz	836625
9A	3NO	1NO	AC 24V 50/60Hz	NXC-09M10/N 24V 50/60Hz	836626
9A	3NO	1NO	DC 48V	NXC-09M10/Z DC 48V	190574
9A	3NO	1NO	DC 220V	NXC-09M10/Z DC 220V	836658
9A	3NO	1NO	DC 110V	NXC-09M10/Z DC 110V	836659
9A	3NO	1NO	DC 24V	NXC-09M10/Z DC 24V	836660
9A	3NO	1NO	DC 48V	NXC-09M10/Z/N DC 48V	956558
9A	3NO	1NO	DC 220V	NXC-09M10/Z/N DC 220V	956559
9A	3NO	1NO	DC 110V	NXC-09M10/Z/N DC 110V	956560
9A	3NO	1NO	DC 24V	NXC-09M10/Z/N DC 24V	956561
9A	3NO	1NO	DC 24V	NXC-09M10/Z/N DC 24V	956561

AC-3 Current	Main Contacts	Auxiliary Contacts	Coil	Model Description	Code
12A	3NO	1NC	AC 380V 50/60Hz	NXC-12M01 380V 50/60Hz	836591
12A	3NO	1NC	AC 220V 50/60Hz	NXC-12M01 220V 50/60Hz	836592
12A	3NO	1NC	AC 110V 50/60Hz	NXC-12M01 110V 50/60Hz	836593
12A	3NO	1NC	AC 24V 50/60Hz	NXC-12M01 24V 50/60Hz	836594
12A	3NO	1NC	AC 240V 50/60Hz	NXC-12M01 240V 50/60Hz	956536
12A	3NO	1NC	AC 380V 50/60Hz	NXC-12M01/N 380V 50/60Hz	836639
12A	3NO	1NC	AC 220V 50/60Hz	NXC-12M01/N 220V 50/60Hz	836640
12A	3NO	1NC	AC 110V 50/60Hz	NXC-12M01/N 110V 50/60Hz	836641
12A	3NO	1NC	AC 24V 50/60Hz	NXC-12M01/N 24V 50/60Hz	836642
12A	3NO	1NC	DC 48V	NXC-12M01/Z DC 48V	190578
12A	3NO	1NC	DC 220V	NXC-12M01/Z DC 220V	836670
12A	3NO	1NC	DC 110V	NXC-12M01/Z DC 110V	836671
12A	3NO	1NC	DC 24V	NXC-12M01/Z DC 24V	836672
12A	3NO	1NC	DC 48V	NXC-12M01/Z/N DC 48V	956574
12A	3NO	1NC	DC 220V	NXC-12M01/Z/N DC 220V	956575
12A	3NO	1NC	DC 110V	NXC-12M01/Z/N DC 110V	956576
12A	3NO	1NC	DC 24V	NXC-12M01/Z/N DC 24V	956577
12A	3NO	1NO	AC 380V 50/60Hz	NXC-12M10 380V 50/60Hz	836579
12A	3NO	1NO	AC 220V 50/60Hz	NXC-12M10 220V 50/60Hz	836580
12A	3NO	1NO	AC 110V 50/60Hz	NXC-12M10 110V 50/60Hz	836581
12A	3NO	1NO	AC 24V 50/60Hz	NXC-12M10 24V 50/60Hz	836582
12A	3NO	1NO	AC 240V 50/60Hz	NXC-12M10 240V 50/60Hz	956533
12A	3NO	1NO	AC 380V 50/60Hz	NXC-12M10/N 380V 50/60Hz	836627
12A	3NO	1NO	AC 220V 50/60Hz	NXC-12M10/N 220V 50/60Hz	836628
12A	3NO	1NO	AC 110V 50/60Hz	NXC-12M10/N 110V 50/60Hz	836629
12A	3NO	1NO	AC 24V 50/60Hz	NXC-12M10/N 24V 50/60Hz	836630
12A	3NO	1NO	DC 48V	NXC-12M10/Z DC 48V	190575
12A	3NO	1NO	DC 220V	NXC-12M10/Z DC 220V	836661
12A	3NO	1NO	DC 110V	NXC-12M10/Z DC 110V	836662
12A	3NO	1NO	DC 24V	NXC-12M10/Z DC 24V	836663
12A	3NO	1NO	DC 48V	NXC-12M10/Z/N DC 48V	956562
12A	3NO	1NO	DC 220V	NXC-12M10/Z/N DC 220V	956563
12A	3NO	1NO	DC 110V	NXC-12M10/Z/N DC 110V	956564
12A	3NO	1NO	DC 24V	NXC-12M10/Z/N DC 24V	956565

AC-3 Current	Main Contacts	Auxiliary Contacts	Coil	Model Description	Code
16A	3NO	1NC	AC 380V 50/60Hz	NXC-16M01 380V 50/60Hz	171741
16A	3NO	1NC	AC 220V 50/60Hz	NXC-16M01 220V 50/60Hz	171742
16A	3NO	1NC	AC 110V 50/60Hz	NXC-16M01 110V 50/60Hz	171743
16A	3NO	1NC	AC 24V 50/60Hz	NXC-16M01 24V 50/60Hz	171744
16A	3NO	1NC	DC 220V	NXC-16M01/Z DC 220V	171745
16A	3NO	1NC	DC 110V	NXC-16M01/Z DC 110V	171746
16A	3NO	1NC	DC 24V	NXC-16M01/Z DC 24V	171747
16A	3NO	1NO	AC 380V 50/60Hz	NXC-16M10 380V 50/60Hz	171734
16A	3NO	1NO	AC 220V 50/60Hz	NXC-16M10 220V 50/60Hz	171735
16A	3NO	1NO	AC 110V 50/60Hz	NXC-16M10 110V 50/60Hz	171736
16A	3NO	1NO	AC 24V 50/60Hz	NXC-16M10 24V 50/60Hz	171737
16A	3NO	1NO	AC 415V 50/60Hz	NXC-16M10/N 415V 50/60Hz	264587
16A	3NO	1NO	DC 220V	NXC-16M10/Z DC 220V	171738
16A	3NO	1NO	DC 110V	NXC-16M10/Z DC 110V	171739
16A	3NO	1NO	DC 24V	NXC-16M10/Z DC 24V	171740

NXC Mini type Contactor 4P (6~16A)

AC-3 Current	Main Contacts	Auxiliary Contacts	Coil	Model Description	Code
6A	2NO+2NC	-	AC 380V 50/60Hz	NXC-06M/22 380V 50/60Hz	836607
6A	2NO+2NC	-	AC 220V 50/60Hz	NXC-06M/22 220V 50/60Hz	836608
6A	2NO+2NC	-	AC 110V 50/60Hz	NXC-06M/22 110V 50/60Hz	836609
6A	2NO+2NC	-	AC 24V 50/60Hz	NXC-06M/22 24V 50/60Hz	836610
6A	2NO+2NC	-	AC 240V 50/60Hz	NXC-06M/22 240V 50/60Hz	956540
6A	2NO+2NC	-	DC 48V	NXC-06M/22/Z DC 48V	190582
6A	2NO+2NC	-	DC 220V	NXC-06M/22/Z DC 220V	836682
6A	2NO+2NC	-	DC 110V	NXC-06M/22/Z DC 110V	836683
6A	2NO+2NC	-	DC 24V	NXC-06M/22/Z DC 24V	836684
6A	4NO	-	AC 380V 50/60Hz	NXC-06M/4 380V 50/60Hz	836595
6A	4NO	-	AC 220V 50/60Hz	NXC-06M/4 220V 50/60Hz	836596
6A	4NO	-	AC 110V 50/60Hz	NXC-06M/4 110V 50/60Hz	836597
6A	4NO	-	AC 24V 50/60Hz	NXC-06M/4 24V 50/60Hz	836598
6A	4NO	-	AC 240V 50/60Hz	NXC-06M/4 240V 50/60Hz	956537
6A	4NO	-	AC 380V 50/60Hz	NXC-06M/4/N 380V 50/60Hz	836643
6A	4NO	-	AC 220V 50/60Hz	NXC-06M/4/N 220V 50/60Hz	836644
6A	4NO	-	AC 110V 50/60Hz	NXC-06M/4/N 110V 50/60Hz	836645
6A	4NO	-	AC 24V 50/60Hz	NXC-06M/4/N 24V 50/60Hz	836646
6A	4NO	-	DC 48V	NXC-06M/4/Z DC 48V	190579
6A	4NO	-	DC 220V	NXC-06M/4/Z DC 220V	836673
6A	4NO	-	DC 110V	NXC-06M/4/Z DC 110V	836674
6A	4NO	-	DC 24V	NXC-06M/4/Z DC 24V	836675
6A	4NO	-	DC 48V	NXC-06M/4/Z/N DC 48V	956578
6A	4NO	-	DC 220V	NXC-06M/4/Z/N DC 220V	956579
6A	4NO	-	DC 110V	NXC-06M/4/Z/N DC 110V	956580
6A	4NO	-	DC 24V	NXC-06M/4/Z/N DC 24V	956581
9A	2NO+2NC	-	AC 380V 50/60Hz	NXC-09M/22 380V 50/60Hz	836611
9A	2NO+2NC	-	AC 230V 50/60Hz	NXC-09M/22 230V 50/60Hz	599765
9A	2NO+2NC	-	AC 220V 50/60Hz	NXC-09M/22 220V 50/60Hz	836612
9A	2NO+2NC	-	AC 110V 50/60Hz	NXC-09M/22 110V 50/60Hz	836613
9A	2NO+2NC	-	AC 24V 50/60Hz	NXC-09M/22 24V 50/60Hz	836614
9A	2NO+2NC	-	AC 240V 50/60Hz	NXC-09M/22 240V 50/60Hz	956541
9A	2NO+2NC	-	DC 48V	NXC-09M/22/Z DC 48V	190583
9A	2NO+2NC	-	DC 220V	NXC-09M/22/Z DC 220V	836685
9A	2NO+2NC	-	DC 110V	NXC-09M/22/Z DC 110V	836686
9A	2NO+2NC	-	DC 24V	NXC-09M/22/Z DC 24V	836687
9A	4NO	-	AC 380V 50/60Hz	NXC-09M/4 380V 50/60Hz	836599
9A	4NO	-	AC 220V 50/60Hz	NXC-09M/4 220V 50/60Hz	836600
9A	4NO	-	AC 110V 50/60Hz	NXC-09M/4 110V 50/60Hz	836601
9A	4NO	-	AC 24V 50/60Hz	NXC-09M/4 24V 50/60Hz	836602
9A	4NO	-	AC 240V 50/60Hz	NXC-09M/4 240V 50/60Hz	956538
9A	4NO	-	AC 380V 50/60Hz	NXC-09M/4/N 380V 50/60Hz	836647
9A	4NO	-	AC 220V 50/60Hz	NXC-09M/4/N 220V 50/60Hz	836648
9A	4NO	-	AC 110V 50/60Hz	NXC-09M/4/N 110V 50/60Hz	836649
9A	4NO	-	AC 24V 50/60Hz	NXC-09M/4/N 24V 50/60Hz	836650
9A	4NO	-	DC 48V	NXC-09M/4/Z DC 48V	190580
9A	4NO	-	DC 220V	NXC-09M/4/Z DC 220V	836676
9A	4NO	-	DC 110V	NXC-09M/4/Z DC 110V	836677
9A	4NO	-	DC 24V	NXC-09M/4/Z DC 24V	836678
9A	4NO	-	DC 48V	NXC-09M/4/Z/N DC 48V	956582
9A	4NO	-	DC 220V	NXC-09M/4/Z/N DC 220V	956583
9A	4NO	-	DC 110V	NXC-09M/4/Z/N DC 110V	956584
9A	4NO	-	DC 24V	NXC-09M/4/Z/N DC 24V	956585

AC-3 Current	Main Contacts	Auxiliary Contacts	Coil	Model Description	Code
12A	2NO+2NC	-	AC 380V 50/60Hz	NXC-12M/22 380V 50/60Hz	836615
12A	2NO+2NC	-	AC 220V 50/60Hz	NXC-12M/22 220V 50/60Hz	836616
12A	2NO+2NC	-	AC 110V 50/60Hz	NXC-12M/22 110V 50/60Hz	836617
12A	2NO+2NC	-	AC 24V 50/60Hz	NXC-12M/22 24V 50/60Hz	836618
12A	2NO+2NC	-	AC 230V 50/60Hz	NXC-12M/22 230V 50/60Hz	938250
12A	2NO+2NC	-	AC 240V 50/60Hz	NXC-12M/22 240V 50/60Hz	956542
12A	2NO+2NC	-	DC 48V	NXC-12M/22/Z DC 48V	190584
12A	2NO+2NC	-	DC 220V	NXC-12M/22/Z DC 220V	836688
12A	2NO+2NC	-	DC 110V	NXC-12M/22/Z DC 110V	836689
12A	2NO+2NC	-	DC 24V	NXC-12M/22/Z DC 24V	836690
12A	4NO	-	AC 380V 50/60Hz	NXC-12M/4 380V 50/60Hz	836603
12A	4NO	-	AC 220V 50/60Hz	NXC-12M/4 220V 50/60Hz	836604
12A	4NO	-	AC 110V 50/60Hz	NXC-12M/4 110V 50/60Hz	836605
12A	4NO	-	AC 24V 50/60Hz	NXC-12M/4 24V 50/60Hz	836606
12A	4NO	-	AC 240V 50/60Hz	NXC-12M/4 240V 50/60Hz	956539
12A	4NO	-	AC 380V 50/60Hz	NXC-12M/4/N 380V 50/60Hz	836651
12A	4NO	-	AC 220V 50/60Hz	NXC-12M/4/N 220V 50/60Hz	836652
12A	4NO	-	AC 110V 50/60Hz	NXC-12M/4/N 110V 50/60Hz	836653
12A	4NO	-	AC 24V 50/60Hz	NXC-12M/4/N 24V 50/60Hz	836654
12A	4NO	-	DC 48V	NXC-12M/4/Z DC 48V	190581
12A	4NO	-	DC 220V	NXC-12M/4/Z DC 220V	836679
12A	4NO	-	DC 110V	NXC-12M/4/Z DC 110V	836680
12A	4NO	-	DC 24V	NXC-12M/4/Z DC 24V	836681
12A	4NO	-	DC 48V	NXC-12M/4/Z/N DC 48V	956586
12A	4NO	-	DC 220V	NXC-12M/4/Z/N DC 220V	956587
12A	4NO	-	DC 110V	NXC-12M/4/Z/N DC 110V	956588
12A	4NO	-	DC 24V	NXC-12M/4/Z/N DC 24V	956589
12A	4NO	-	DC 110V	NXC-12M/4/Z/N DC 110V	956588
12A	4NO	-	DC 24V	NXC-12M/4/Z/N DC 24V	956589
16A	2NO+2NC	-	AC 380V 50/60Hz	NXC-16M/22 380V 50/60Hz	171755
16A	2NO+2NC	-	AC 220V 50/60Hz	NXC-16M/22 220V 50/60Hz	171756
16A	2NO+2NC	-	AC 110V 50/60Hz	NXC-16M/22 110V 50/60Hz	171757
16A	2NO+2NC	-	AC 24V 50/60Hz	NXC-16M/22 24V 50/60Hz	171758
16A	2NO+2NC	-	DC 220V	NXC-16M/22/Z DC 220V	171759
16A	2NO+2NC	-	DC 110V	NXC-16M/22/Z DC 110V	171760
16A	2NO+2NC	-	DC 24V	NXC-16M/22/Z DC 24V	171761
16A	4NO	-	AC 380V 50/60Hz	NXC-16M/4 380V 50/60Hz	171748
16A	4NO	-	AC 220V 50/60Hz	NXC-16M/4 220V 50/60Hz	171749
16A	4NO	-	AC 110V 50/60Hz	NXC-16M/4 110V 50/60Hz	171750
16A	4NO	-	AC 24V 50/60Hz	NXC-16M/4 24V 50/60Hz	171751
16A	4NO	-	DC 220V	NXC-16M/4/Z DC 220V	171752
16A	4NO	-	DC 110V	NXC-16M/4/Z DC 110V	171753
16A	4NO	-	DC 24V	NXC-16M/4/Z DC 24V	171754

NXC Contactor 6~630A

AC-3 Current	Main Contacts	Auxiliary Contacts	Coil	Model Description	Code
6A	3NO	1NO+1NC	AC 24V 50Hz	NXC-06 24V 50Hz	836691
6A	3NO	1NO+1NC	AC 110V 50Hz	NXC-06 110V 50Hz	836694
6A	3NO	1NO+1NC	AC 127V 50Hz	NXC-06 127V 50Hz	836695
6A	3NO	1NO+1NC	AC 220V 50Hz	NXC-06 220V 50Hz	836696
6A	3NO	1NO+1NC	AC 380V 50Hz	NXC-06 380V 50Hz	836697
6A	3NO	1NO+1NC	AC 415V 50Hz	NXC-06 415V 50Hz	836698
6A	3NO	1NO+1NC	AC 110V 50/60Hz	NXC-06 110V 50/60Hz	925281
6A	3NO	1NO+1NC	AC 110V 60Hz	NXC-06 110V 60Hz	925283
6A	3NO	1NO+1NC	AC 127V 50/60Hz	NXC-06 127V 50/60Hz	925285
6A	3NO	1NO+1NC	AC 127V 60Hz	NXC-06 127V 60Hz	925287
6A	3NO	1NO+1NC	AC 220V 50/60Hz	NXC-06 220V 50/60Hz	925289
6A	3NO	1NO+1NC	AC 220V 60Hz	NXC-06 220V 60Hz	925291
6A	3NO	1NO+1NC	AC 24V 50/60Hz	NXC-06 24V 50/60Hz	925293
6A	3NO	1NO+1NC	AC 24V 60Hz	NXC-06 24V 60Hz	925295
6A	3NO	1NO+1NC	AC 380V 50/60Hz	NXC-06 380V 50/60Hz	925301
6A	3NO	1NO+1NC	AC 380V 60Hz	NXC-06 380V 60Hz	925303
6A	3NO	1NO+1NC	AC 415V 50/60Hz	NXC-06 415V 50/60Hz	925305
6A	3NO	1NO+1NC	AC 415V 60Hz	NXC-06 415V 60Hz	925307
6A	3NO	1NO+1NC	AC 230V 50Hz	NXC-06 230V 50Hz	938705
6A	3NO	1NO+1NC	AC 230V 50/60Hz	NXC-06 230V 50/60Hz	938706
6A	3NO	1NO+1NC	AC 230V 60Hz	NXC-06 230V 60Hz	938707
6A	3NO	1NO+1NC	AC 240V 50Hz	NXC-06 240V 50Hz	938729
6A	3NO	1NO+1NC	AC 240V 50/60Hz	NXC-06 240V 50/60Hz	938730
6A	3NO	1NO+1NC	AC 240V 60Hz	NXC-06 240V 60Hz	938731
6A	3NO	1NO+1NC	AC 400V 50Hz	NXC-06 400V 50Hz	938777
6A	3NO	1NO+1NC	AC 400V 50/60Hz	NXC-06 400V 50/60Hz	938778
6A	3NO	1NO+1NC	AC 400V 60Hz	NXC-06 400V 60Hz	938779
6A	3NO	1NO+1NC	AC 440V 50Hz	NXC-06 440V 50Hz	938801
6A	3NO	1NO+1NC	AC 440V 50/60Hz	NXC-06 440V 50/60Hz	938802
6A	3NO	1NO+1NC	AC 440V 60Hz	NXC-06 440V 60Hz	938803

AC-3 Current	Main Contacts	Auxiliary Contacts	Coil	Model Description	Code
6A	3NO	1NO+1NC	AC 24V 50Hz	NXC-06/N 24V 50Hz	836723
6A	3NO	1NO+1NC	AC 110V 50Hz	NXC-06/N 110V 50Hz	836726
6A	3NO	1NO+1NC	AC 127V 50Hz	NXC-06/N 127V 50Hz	836727
6A	3NO	1NO+1NC	AC 220V 50Hz	NXC-06/N 220V 50Hz	836728
6A	3NO	1NO+1NC	AC 380V 50Hz	NXC-06/N 380V 50Hz	836729
6A	3NO	1NO+1NC	AC 415V 50Hz	NXC-06/N 415V 50Hz	836730
6A	3NO	1NO+1NC	AC 110V 50/60Hz	NXC-06/N 110V 50/60Hz	925313
6A	3NO	1NO+1NC	AC 110V 60Hz	NXC-06/N 110V 60Hz	925315
6A	3NO	1NO+1NC	AC 127V 50/60Hz	NXC-06/N 127V 50/60Hz	925317
6A	3NO	1NO+1NC	AC 127V 60Hz	NXC-06/N 127V 60Hz	925319
6A	3NO	1NO+1NC	AC 220V 50/60Hz	NXC-06/N 220V 50/60Hz	925321
6A	3NO	1NO+1NC	AC 220V 60Hz	NXC-06/N 220V 60Hz	925323
6A	3NO	1NO+1NC	AC 24V 50/60Hz	NXC-06/N 24V 50/60Hz	925325
6A	3NO	1NO+1NC	AC 24V 60Hz	NXC-06/N 24V 60Hz	925327
6A	3NO	1NO+1NC	AC 380V 50/60Hz	NXC-06/N 380V 50/60Hz	925333
6A	3NO	1NO+1NC	AC 380V 60Hz	NXC-06/N 380V 60Hz	925335
6A	3NO	1NO+1NC	AC 415V 50/60Hz	NXC-06/N 415V 50/60Hz	925337
6A	3NO	1NO+1NC	AC 415V 60Hz	NXC-06/N 415V 60Hz	925339
6A	3NO	1NO+1NC	AC 230V 50Hz	NXC-06/N 230V 50Hz	938873
6A	3NO	1NO+1NC	AC 230V 50/60Hz	NXC-06/N 230V 50/60Hz	938874
6A	3NO	1NO+1NC	AC 230V 60Hz	NXC-06/N 230V 60Hz	938875
6A	3NO	1NO+1NC	AC 240V 50Hz	NXC-06/N 240V 50Hz	938897
6A	3NO	1NO+1NC	AC 240V 50/60Hz	NXC-06/N 240V 50/60Hz	938898
6A	3NO	1NO+1NC	AC 240V 60Hz	NXC-06/N 240V 60Hz	938899
6A	3NO	1NO+1NC	AC 400V 50Hz	NXC-06/N 400V 50Hz	938945
6A	3NO	1NO+1NC	AC 400V 50/60Hz	NXC-06/N 400V 50/60Hz	938946
6A	3NO	1NO+1NC	AC 400V 60Hz	NXC-06/N 400V 60Hz	938947
6A	3NO	1NO+1NC	AC 440V 50Hz	NXC-06/N 440V 50Hz	938969
6A	3NO	1NO+1NC	AC 440V 50/60Hz	NXC-06/N 440V 50/60Hz	938970
6A	3NO	1NO+1NC	AC 440V 60Hz	NXC-06/N 440V 60Hz	938971

AC-3 Current	Main Contacts	Auxiliary Contacts	Coil	Model Description	Code
9A	3NO	1NO+1NC	AC 24V 50Hz	NXC-09 24V 50Hz	836699
9A	3NO	1NO+1NC	AC 110V 50Hz	NXC-09 110V 50Hz	836702
9A	3NO	1NO+1NC	AC 127V 50Hz	NXC-09 127V 50Hz	836703
9A	3NO	1NO+1NC	AC 220V 50Hz	NXC-09 220V 50Hz	836704
9A	3NO	1NO+1NC	AC 380V 50Hz	NXC-09 380V 50Hz	836705
9A	3NO	1NO+1NC	AC 415V 50Hz	NXC-09 415V 50Hz	836706
9A	3NO	1NO+1NC	AC 110V 50/60Hz	NXC-09 110V 50/60Hz	925345
9A	3NO	1NO+1NC	AC 110V 60Hz	NXC-09 110V 60Hz	925347
9A	3NO	1NO+1NC	AC 127V 50/60Hz	NXC-09 127V 50/60Hz	925349
9A	3NO	1NO+1NC	AC 127V 60Hz	NXC-09 127V 60Hz	925351
9A	3NO	1NO+1NC	AC 220V 50/60Hz	NXC-09 220V 50/60Hz	925353
9A	3NO	1NO+1NC	AC 220V 60Hz	NXC-09 220V 60Hz	925355
9A	3NO	1NO+1NC	AC 24V 50/60Hz	NXC-09 24V 50/60Hz	925357
9A	3NO	1NO+1NC	AC 24V 60Hz	NXC-09 24V 60Hz	925359
9A	3NO	1NO+1NC	AC 380V 50/60Hz	NXC-09 380V 50/60Hz	925365
9A	3NO	1NO+1NC	AC 380V 60Hz	NXC-09 380V 60Hz	925367
9A	3NO	1NO+1NC	AC 415V 50/60Hz	NXC-09 415V 50/60Hz	925369
9A	3NO	1NO+1NC	AC 415V 60Hz	NXC-09 415V 60Hz	925371
9A	3NO	1NO+1NC	AC 230V 50Hz	NXC-09 230V 50Hz	938711
9A	3NO	1NO+1NC	AC 230V 50/60Hz	NXC-09 230V 50/60Hz	938712
9A	3NO	1NO+1NC	AC 230V 60Hz	NXC-09 230V 60Hz	938713
9A	3NO	1NO+1NC	AC 240V 50Hz	NXC-09 240V 50Hz	938735
9A	3NO	1NO+1NC	AC 240V 50/60Hz	NXC-09 240V 50/60Hz	938736
9A	3NO	1NO+1NC	AC 240V 60Hz	NXC-09 240V 60Hz	938737
9A	3NO	1NO+1NC	AC 400V 50Hz	NXC-09 400V 50Hz	938783
9A	3NO	1NO+1NC	AC 400V 50/60Hz	NXC-09 400V 50/60Hz	938784
9A	3NO	1NO+1NC	AC 400V 60Hz	NXC-09 400V 60Hz	938785
9A	3NO	1NO+1NC	AC 440V 50Hz	NXC-09 440V 50Hz	938807
9A	3NO	1NO+1NC	AC 440V 50/60Hz	NXC-09 440V 50/60Hz	938808
9A	3NO	1NO+1NC	AC 440V 60Hz	NXC-09 440V 60Hz	938809
9A	3NO	1NO+1NC	AC 24V 50Hz	NXC-09/N 24V 50Hz	836731
9A	3NO	1NO+1NC	AC 110V 50Hz	NXC-09/N 110V 50Hz	836734
9A	3NO	1NO+1NC	AC 127V 50Hz	NXC-09/N 127V 50Hz	836735
9A	3NO	1NO+1NC	AC 220V 50Hz	NXC-09/N 220V 50Hz	836736
9A	3NO	1NO+1NC	AC 380V 50Hz	NXC-09/N 380V 50Hz	836737
9A	3NO	1NO+1NC	AC 415V 50Hz	NXC-09/N 415V 50Hz	836738
9A	3NO	1NO+1NC	AC 110V 50/60Hz	NXC-09/N 110V 50/60Hz	925377
9A	3NO	1NO+1NC	AC 110V 60Hz	NXC-09/N 110V 60Hz	925379
9A	3NO	1NO+1NC	AC 127V 50/60Hz	NXC-09/N 127V 50/60Hz	925381
9A	3NO	1NO+1NC	AC 127V 60Hz	NXC-09/N 127V 60Hz	925383
9A	3NO	1NO+1NC	AC 220V 50/60Hz	NXC-09/N 220V 50/60Hz	925385
9A	3NO	1NO+1NC	AC 220V 60Hz	NXC-09/N 220V 60Hz	925387

AC-3 Current	Main Contacts	Auxiliary Contacts	Coil	Model Description	Code
9A	3NO	1NO+1NC	AC 24V 50/60Hz	NXC-09/N 24V 50/60Hz	925389
9A	3NO	1NO+1NC	AC 24V 60Hz	NXC-09/N 24V 60Hz	925391
9A	3NO	1NO+1NC	AC 380V 50/60Hz	NXC-09/N 380V 50/60Hz	925397
9A	3NO	1NO+1NC	AC 380V 60Hz	NXC-09/N 380V 60Hz	925399
9A	3NO	1NO+1NC	AC 415V 50/60Hz	NXC-09/N 415V 50/60Hz	925401
9A	3NO	1NO+1NC	AC 415V 60Hz	NXC-09/N 415V 60Hz	925403
9A	3NO	1NO+1NC	AC 230V 50Hz	NXC-09/N 230V 50Hz	938879
9A	3NO	1NO+1NC	AC 230V 50/60Hz	NXC-09/N 230V 50/60Hz	938880
9A	3NO	1NO+1NC	AC 230V 60Hz	NXC-09/N 230V 60Hz	938881
9A	3NO	1NO+1NC	AC 240V 50Hz	NXC-09/N 240V 50Hz	938903
9A	3NO	1NO+1NC	AC 240V 50/60Hz	NXC-09/N 240V 50/60Hz	938904
9A	3NO	1NO+1NC	AC 240V 60Hz	NXC-09/N 240V 60Hz	938905
9A	3NO	1NO+1NC	AC 400V 50Hz	NXC-09/N 400V 50Hz	938951
9A	3NO	1NO+1NC	AC 400V 50/60Hz	NXC-09/N 400V 50/60Hz	938952
9A	3NO	1NO+1NC	AC 400V 60Hz	NXC-09/N 400V 60Hz	938953
9A	3NO	1NO+1NC	AC 440V 50Hz	NXC-09/N 440V 50Hz	938975
9A	3NO	1NO+1NC	AC 440V 50/60Hz	NXC-09/N 440V 50/60Hz	938976
9A	3NO	1NO+1NC	AC 440V 60Hz	NXC-09/N 440V 60Hz	938977
9A	2NO+2NC	-	AC 415V 60Hz	NXC-09/22 415V 60Hz	301845
9A	2NO+2NC	-	AC 380V 50/60Hz	NXC-09/22 380V 50/60Hz	301856
9A	2NO+2NC	-	AC 24V 60Hz	NXC-09/22 24V 60Hz	301861
9A	2NO+2NC	-	AC 127V 50/60Hz	NXC-09/22 127V 50/60Hz	301865
9A	2NO+2NC	-	AC 415V 50/60Hz	NXC-09/22 415V 50/60Hz	301882
9A	2NO+2NC	-	AC 24V 50/60Hz	NXC-09/22 24V 50/60Hz	301905
9A	2NO+2NC	-	AC 127V 60Hz	NXC-09/22 127V 60Hz	301911
9A	2NO+2NC	-	AC 110V 60Hz	NXC-09/22 110V 60Hz	301916
9A	2NO+2NC	-	AC 220V 60Hz	NXC-09/22 220V 60Hz	301919
9A	2NO+2NC	-	AC 110V 50/60Hz	NXC-09/22 110V 50/60Hz	301926
9A	2NO+2NC	-	AC 220V 50/60Hz	NXC-09/22 220V 50/60Hz	301933
9A	2NO+2NC	-	AC 380V 60Hz	NXC-09/22 380V 60Hz	301938
9A	4NO	-	AC 380V 50/60Hz	NXC-09/4 380V 50/60Hz	301850
9A	4NO	-	AC 380V 60Hz	NXC-09/4 380V 60Hz	301866
9A	4NO	-	AC 127V 50/60Hz	NXC-09/4 127V 50/60Hz	301871
9A	4NO	-	AC 220V 60Hz	NXC-09/4 220V 60Hz	301874
9A	4NO	-	AC 24V 60Hz	NXC-09/4 24V 60Hz	301878
9A	4NO	-	AC 415V 50/60Hz	NXC-09/4 415V 50/60Hz	301886
9A	4NO	-	AC 127V 60Hz	NXC-09/4 127V 60Hz	301894
9A	4NO	-	AC 220V 50/60Hz	NXC-09/4 220V 50/60Hz	301898
9A	4NO	-	AC 110V 60Hz	NXC-09/4 110V 60Hz	301909
9A	4NO	-	AC 110V 50/60Hz	NXC-09/4 110V 50/60Hz	301915
9A	4NO	-	AC 415V 60Hz	NXC-09/4 415V 60Hz	301927
9A	4NO	-	AC 24V 50/60Hz	NXC-09/4 24V 50/60Hz	301940

AC-3 Current	Main Contacts	Auxiliary Contacts	Coil	Model Description	Code
12A	3NO	1NO+1NC	AC 24V 50Hz	NXC-12 24V 50Hz	836707
12A	3NO	1NO+1NC	AC 110V 50Hz	NXC-12 110V 50Hz	836710
12A	3NO	1NO+1NC	AC 127V 50Hz	NXC-12 127V 50Hz	836711
12A	3NO	1NO+1NC	AC 220V 50Hz	NXC-12 220V 50Hz	836712
12A	3NO	1NO+1NC	AC 380V 50Hz	NXC-12 380V 50Hz	836713
12A	3NO	1NO+1NC	AC 415V 50Hz	NXC-12 415V 50Hz	836714
12A	3NO	1NO+1NC	AC 110V 50/60Hz	NXC-12 110V 50/60Hz	925471
12A	3NO	1NO+1NC	AC 110V 60Hz	NXC-12 110V 60Hz	925473
12A	3NO	1NO+1NC	AC 127V 50/60Hz	NXC-12 127V 50/60Hz	925475
12A	3NO	1NO+1NC	AC 127V 60Hz	NXC-12 127V 60Hz	925477
12A	3NO	1NO+1NC	AC 220V 50/60Hz	NXC-12 220V 50/60Hz	925479
12A	3NO	1NO+1NC	AC 220V 60Hz	NXC-12 220V 60Hz	925481
12A	3NO	1NO+1NC	AC 24V 50/60Hz	NXC-12 24V 50/60Hz	925483
12A	3NO	1NO+1NC	AC 24V 60Hz	NXC-12 24V 60Hz	925485
12A	3NO	1NO+1NC	AC 380V 50/60Hz	NXC-12 380V 50/60Hz	925491
12A	3NO	1NO+1NC	AC 380V 60Hz	NXC-12 380V 60Hz	925493
12A	3NO	1NO+1NC	AC 415V 50/60Hz	NXC-12 415V 50/60Hz	925495
12A	3NO	1NO+1NC	AC 415V 60Hz	NXC-12 415V 60Hz	925497
12A	3NO	1NO+1NC	AC 230V 50Hz	NXC-12 230V 50Hz	938717
12A	3NO	1NO+1NC	AC 230V 50/60Hz	NXC-12 230V 50/60Hz	938718
12A	3NO	1NO+1NC	AC 230V 60Hz	NXC-12 230V 60Hz	938719
12A	3NO	1NO+1NC	AC 240V 50Hz	NXC-12 240V 50Hz	938741
12A	3NO	1NO+1NC	AC 240V 50/60Hz	NXC-12 240V 50/60Hz	938742
12A	3NO	1NO+1NC	AC 240V 60Hz	NXC-12 240V 60Hz	938743
12A	3NO	1NO+1NC	AC 400V 50Hz	NXC-12 400V 50Hz	938789
12A	3NO	1NO+1NC	AC 400V 50/60Hz	NXC-12 400V 50/60Hz	938790
12A	3NO	1NO+1NC	AC 400V 60Hz	NXC-12 400V 60Hz	938791
12A	3NO	1NO+1NC	AC 440V 50Hz	NXC-12 440V 50Hz	938813
12A	3NO	1NO+1NC	AC 440V 50/60Hz	NXC-12 440V 50/60Hz	938814
12A	3NO	1NO+1NC	AC 440V 60Hz	NXC-12 440V 60Hz	938815
12A	3NO	1NO+1NC	AC 24V 50Hz	NXC-12/N 24V 50Hz	836739
12A	3NO	1NO+1NC	AC 110V 50Hz	NXC-12/N 110V 50Hz	836742
12A	3NO	1NO+1NC	AC 127V 50Hz	NXC-12/N 127V 50Hz	836743
12A	3NO	1NO+1NC	AC 220V 50Hz	NXC-12/N 220V 50Hz	836744
12A	3NO	1NO+1NC	AC 380V 50Hz	NXC-12/N 380V 50Hz	836745
12A	3NO	1NO+1NC	AC 415V 50Hz	NXC-12/N 415V 50Hz	836746
12A	3NO	1NO+1NC	AC 110V 50/60Hz	NXC-12/N 110V 50/60Hz	925503
12A	3NO	1NO+1NC	AC 110V 60Hz	NXC-12/N 110V 60Hz	925505
12A	3NO	1NO+1NC	AC 127V 50/60Hz	NXC-12/N 127V 50/60Hz	925507
12A	3NO	1NO+1NC	AC 127V 60Hz	NXC-12/N 127V 60Hz	925509
12A	3NO	1NO+1NC	AC 220V 50/60Hz	NXC-12/N 220V 50/60Hz	925511
12A	3NO	1NO+1NC	AC 220V 60Hz	NXC-12/N 220V 60Hz	925513

AC-3 Current	Main Contacts	Auxiliary Contacts	Coil	Model Description	Code
12A	3NO	1NO+1NC	AC 24V 50/60Hz	NXC-12/N 24V 50/60Hz	925515
12A	3NO	1NO+1NC	AC 24V 60Hz	NXC-12/N 24V 60Hz	925517
12A	3NO	1NO+1NC	AC 380V 50/60Hz	NXC-12/N 380V 50/60Hz	925523
12A	3NO	1NO+1NC	AC 380V 60Hz	NXC-12/N 380V 60Hz	925525
12A	3NO	1NO+1NC	AC 415V 50/60Hz	NXC-12/N 415V 50/60Hz	925527
12A	3NO	1NO+1NC	AC 415V 60Hz	NXC-12/N 415V 60Hz	925529
12A	3NO	1NO+1NC	AC 230V 50Hz	NXC-12/N 230V 50Hz	938885
12A	3NO	1NO+1NC	AC 230V 50/60Hz	NXC-12/N 230V 50/60Hz	938886
12A	3NO	1NO+1NC	AC 230V 60Hz	NXC-12/N 230V 60Hz	938887
12A	3NO	1NO+1NC	AC 240V 50Hz	NXC-12/N 240V 50Hz	938909
12A	3NO	1NO+1NC	AC 240V 50/60Hz	NXC-12/N 240V 50/60Hz	938910
12A	3NO	1NO+1NC	AC 240V 60Hz	NXC-12/N 240V 60Hz	938911
12A	3NO	1NO+1NC	AC 400V 50Hz	NXC-12/N 400V 50Hz	938957
12A	3NO	1NO+1NC	AC 400V 50/60Hz	NXC-12/N 400V 50/60Hz	938958
12A	3NO	1NO+1NC	AC 400V 60Hz	NXC-12/N 400V 60Hz	938959
12A	3NO	1NO+1NC	AC 440V 50Hz	NXC-12/N 440V 50Hz	938981
12A	3NO	1NO+1NC	AC 440V 50/60Hz	NXC-12/N 440V 50/60Hz	938982
12A	3NO	1NO+1NC	AC 440V 60Hz	NXC-12/N 440V 60Hz	938983
12A	2NO+2NC	-	AC 380V 50/60Hz	NXC-12/22 380V 50/60Hz	301851
12A	2NO+2NC	-	AC 24V 60Hz	NXC-12/22 24V 60Hz	301852
12A	2NO+2NC	-	AC 127V 60Hz	NXC-12/22 127V 60Hz	301873
12A	2NO+2NC	-	AC 127V 50/60Hz	NXC-12/22 127V 50/60Hz	301879
12A	2NO+2NC	-	AC 110V 50/60Hz	NXC-12/22 110V 50/60Hz	301884
12A	2NO+2NC	-	AC 415V 60Hz	NXC-12/22 415V 60Hz	301891
12A	2NO+2NC	-	AC 220V 50/60Hz	NXC-12/22 220V 50/60Hz	301892
12A	2NO+2NC	-	AC 380V 60Hz	NXC-12/22 380V 60Hz	301897
12A	2NO+2NC	-	AC 415V 50/60Hz	NXC-12/22 415V 50/60Hz	301902
12A	2NO+2NC	-	AC 110V 60Hz	NXC-12/22 110V 60Hz	301904
12A	2NO+2NC	-	AC 24V 50/60Hz	NXC-12/22 24V 50/60Hz	301921
12A	2NO+2NC	-	AC 220V 60Hz	NXC-12/22 220V 60Hz	301932
12A	4NO	-	AC 220V 60Hz	NXC-12/4 220V 60Hz	301847
12A	4NO	-	AC 127V 50/60Hz	NXC-12/4 127V 50/60Hz	301855
12A	4NO	-	AC 110V 60Hz	NXC-12/4 110V 60Hz	301867
12A	4NO	-	AC 415V 50/60Hz	NXC-12/4 415V 50/60Hz	301869
12A	4NO	-	AC 24V 60Hz	NXC-12/4 24V 60Hz	301887
12A	4NO	-	AC 220V 50/60Hz	NXC-12/4 220V 50/60Hz	301895
12A	4NO	-	AC 380V 50/60Hz	NXC-12/4 380V 50/60Hz	301903
12A	4NO	-	AC 380V 60Hz	NXC-12/4 380V 60Hz	301907
12A	4NO	-	AC 127V 60Hz	NXC-12/4 127V 60Hz	301908
12A	4NO	-	AC 415V 60Hz	NXC-12/4 415V 60Hz	301910
12A	4NO	-	AC 24V 50/60Hz	NXC-12/4 24V 50/60Hz	301931
12A	4NO	-	AC 110V 50/60Hz	NXC-12/4 110V 50/60Hz	301934

AC-3 Current	Main Contacts	Auxiliary Contacts	Coil	Model Description	Code
16A	3NO	1NO+1NC	AC 24V 50Hz	NXC-16 24V 50Hz	836715
16A	3NO	1NO+1NC	AC 110V 50Hz	NXC-16 110V 50Hz	836718
16A	3NO	1NO+1NC	AC 127V 50Hz	NXC-16 127V 50Hz	836719
16A	3NO	1NO+1NC	AC 220V 50Hz	NXC-16 220V 50Hz	836720
16A	3NO	1NO+1NC	AC 380V 50Hz	NXC-16 380V 50Hz	836721
16A	3NO	1NO+1NC	AC 415V 50Hz	NXC-16 415V 50Hz	836722
16A	3NO	1NO+1NC	AC 110V 50/60Hz	NXC-16 110V 50/60Hz	925535
16A	3NO	1NO+1NC	AC 110V 60Hz	NXC-16 110V 60Hz	925537
16A	3NO	1NO+1NC	AC 127V 50/60Hz	NXC-16 127V 50/60Hz	925539
16A	3NO	1NO+1NC	AC 127V 60Hz	NXC-16 127V 60Hz	925541
16A	3NO	1NO+1NC	AC 220V 50/60Hz	NXC-16 220V 50/60Hz	925543
16A	3NO	1NO+1NC	AC 220V 60Hz	NXC-16 220V 60Hz	925545
16A	3NO	1NO+1NC	AC 24V 50/60Hz	NXC-16 24V 50/60Hz	925547
16A	3NO	1NO+1NC	AC 24V 60Hz	NXC-16 24V 60Hz	925549
16A	3NO	1NO+1NC	AC 380V 50/60Hz	NXC-16 380V 50/60Hz	925555
16A	3NO	1NO+1NC	AC 380V 60Hz	NXC-16 380V 60Hz	925557
16A	3NO	1NO+1NC	AC 415V 50/60Hz	NXC-16 415V 50/60Hz	925559
16A	3NO	1NO+1NC	AC 415V 60Hz	NXC-16 415V 60Hz	925561
16A	3NO	1NO+1NC	AC 230V 50Hz	NXC-16 230V 50Hz	938723
16A	3NO	1NO+1NC	AC 230V 50/60Hz	NXC-16 230V 50/60Hz	938724
16A	3NO	1NO+1NC	AC 230V 60Hz	NXC-16 230V 60Hz	938725
16A	3NO	1NO+1NC	AC 240V 50Hz	NXC-16 240V 50Hz	938747
16A	3NO	1NO+1NC	AC 240V 50/60Hz	NXC-16 240V 50/60Hz	938748
16A	3NO	1NO+1NC	AC 240V 60Hz	NXC-16 240V 60Hz	938749
16A	3NO	1NO+1NC	AC 400V 50Hz	NXC-16 400V 50Hz	938795
16A	3NO	1NO+1NC	AC 400V 50/60Hz	NXC-16 400V 50/60Hz	938796
16A	3NO	1NO+1NC	AC 400V 60Hz	NXC-16 400V 60Hz	938797
16A	3NO	1NO+1NC	AC 440V 50Hz	NXC-16 440V 50Hz	938819
16A	3NO	1NO+1NC	AC 440V 50/60Hz	NXC-16 440V 50/60Hz	938820
16A	3NO	1NO+1NC	AC 440V 60Hz	NXC-16 440V 60Hz	938821

AC-3 Current	Main Contacts	Auxiliary Contacts	Coil	Model Description	Code
16A	3NO	1NO+1NC	AC 24V 50Hz	NXC-16/N 24V 50Hz	836747
16A	3NO	1NO+1NC	AC 110V 50Hz	NXC-16/N 110V 50Hz	836750
16A	3NO	1NO+1NC	AC 127V 50Hz	NXC-16/N 127V 50Hz	836751
16A	3NO	1NO+1NC	AC 220V 50Hz	NXC-16/N 220V 50Hz	836752
16A	3NO	1NO+1NC	AC 380V 50Hz	NXC-16/N 380V 50Hz	836753
16A	3NO	1NO+1NC	AC 415V 50Hz	NXC-16/N 415V 50Hz	836754
16A	3NO	1NO+1NC	AC 110V 50/60Hz	NXC-16/N 110V 50/60Hz	925567
16A	3NO	1NO+1NC	AC 110V 60Hz	NXC-16/N 110V 60Hz	925569
16A	3NO	1NO+1NC	AC 127V 50/60Hz	NXC-16/N 127V 50/60Hz	925571
16A	3NO	1NO+1NC	AC 127V 60Hz	NXC-16/N 127V 60Hz	925573
16A	3NO	1NO+1NC	AC 220V 50/60Hz	NXC-16/N 220V 50/60Hz	925575
16A	3NO	1NO+1NC	AC 220V 60Hz	NXC-16/N 220V 60Hz	925577
16A	3NO	1NO+1NC	AC 24V 50/60Hz	NXC-16/N 24V 50/60Hz	925579
16A	3NO	1NO+1NC	AC 24V 60Hz	NXC-16/N 24V 60Hz	925581
16A	3NO	1NO+1NC	AC 380V 50/60Hz	NXC-16/N 380V 50/60Hz	925587
16A	3NO	1NO+1NC	AC 380V 60Hz	NXC-16/N 380V 60Hz	925589
16A	3NO	1NO+1NC	AC 415V 50/60Hz	NXC-16/N 415V 50/60Hz	925591
16A	3NO	1NO+1NC	AC 415V 60Hz	NXC-16/N 415V 60Hz	925593
16A	3NO	1NO+1NC	AC 230V 50Hz	NXC-16/N 230V 50Hz	938891
16A	3NO	1NO+1NC	AC 230V 50/60Hz	NXC-16/N 230V 50/60Hz	938892
16A	3NO	1NO+1NC	AC 230V 60Hz	NXC-16/N 230V 60Hz	938893
16A	3NO	1NO+1NC	AC 240V 50Hz	NXC-16/N 240V 50Hz	938915
16A	3NO	1NO+1NC	AC 240V 50/60Hz	NXC-16/N 240V 50/60Hz	938916
16A	3NO	1NO+1NC	AC 240V 60Hz	NXC-16/N 240V 60Hz	938917
16A	3NO	1NO+1NC	AC 400V 50Hz	NXC-16/N 400V 50Hz	938963
16A	3NO	1NO+1NC	AC 400V 50/60Hz	NXC-16/N 400V 50/60Hz	938964
16A	3NO	1NO+1NC	AC 400V 60Hz	NXC-16/N 400V 60Hz	938965
16A	3NO	1NO+1NC	AC 440V 50Hz	NXC-16/N 440V 50Hz	938987
16A	3NO	1NO+1NC	AC 440V 50/60Hz	NXC-16/N 440V 50/60Hz	938988
16A	3NO	1NO+1NC	AC 440V 60Hz	NXC-16/N 440V 60Hz	938989

AC-3 Current	Main Contacts	Auxiliary Contacts	Coil	Model Description	Code
18A	3NO	1NO+1NC	AC 24V 50Hz	NXC-18 24V 50Hz	836899
18A	3NO	1NO+1NC	AC 110V 50Hz	NXC-18 110V 50Hz	836902
18A	3NO	1NO+1NC	AC 127V 50Hz	NXC-18 127V 50Hz	836903
18A	3NO	1NO+1NC	AC 220V 50Hz	NXC-18 220V 50Hz	836904
18A	3NO	1NO+1NC	AC 380V 50Hz	NXC-18 380V 50Hz	836905
18A	3NO	1NO+1NC	AC 415V 50Hz	NXC-18 415V 50Hz	836906
18A	3NO	1NO+1NC	AC 110V 50/60Hz	NXC-18 110V 50/60Hz	925599
18A	3NO	1NO+1NC	AC 110V 60Hz	NXC-18 110V 60Hz	925601
18A	3NO	1NO+1NC	AC 127V 50/60Hz	NXC-18 127V 50/60Hz	925603
18A	3NO	1NO+1NC	AC 127V 60Hz	NXC-18 127V 60Hz	925605
18A	3NO	1NO+1NC	AC 220V 50/60Hz	NXC-18 220V 50/60Hz	925607
18A	3NO	1NO+1NC	AC 220V 60Hz	NXC-18 220V 60Hz	925609
18A	3NO	1NO+1NC	AC 24V 50/60Hz	NXC-18 24V 50/60Hz	925611
18A	3NO	1NO+1NC	AC 24V 60Hz	NXC-18 24V 60Hz	925613
18A	3NO	1NO+1NC	AC 380V 50/60Hz	NXC-18 380V 50/60Hz	925619
18A	3NO	1NO+1NC	AC 380V 60Hz	NXC-18 380V 60Hz	925621
18A	3NO	1NO+1NC	AC 415V 50/60Hz	NXC-18 415V 50/60Hz	925623
18A	3NO	1NO+1NC	AC 415V 60Hz	NXC-18 415V 60Hz	925625
18A	3NO	1NO+1NC	AC 230V 50Hz	NXC-18 230V 50Hz	938525
18A	3NO	1NO+1NC	AC 230V 50/60Hz	NXC-18 230V 50/60Hz	938526
18A	3NO	1NO+1NC	AC 230V 60Hz	NXC-18 230V 60Hz	938527
18A	3NO	1NO+1NC	AC 240V 50Hz	NXC-18 240V 50Hz	938537
18A	3NO	1NO+1NC	AC 240V 50/60Hz	NXC-18 240V 50/60Hz	938538
18A	3NO	1NO+1NC	AC 240V 60Hz	NXC-18 240V 60Hz	938539
18A	3NO	1NO+1NC	AC 400V 50Hz	NXC-18 400V 50Hz	938561
18A	3NO	1NO+1NC	AC 400V 50/60Hz	NXC-18 400V 50/60Hz	938562
18A	3NO	1NO+1NC	AC 400V 60Hz	NXC-18 400V 60Hz	938563
18A	3NO	1NO+1NC	AC 440V 50Hz	NXC-18 440V 50Hz	938573
18A	3NO	1NO+1NC	AC 440V 50/60Hz	NXC-18 440V 50/60Hz	938574
18A	3NO	1NO+1NC	AC 440V 60Hz	NXC-18 440V 60Hz	938575

AC-3 Current	Main Contacts	Auxiliary Contacts	Coil	Model Description	Code
18A	3NO	1NO+1NC	AC 24V 50Hz	NXC-18/N 24V 50Hz	836915
18A	3NO	1NO+1NC	AC 110V 50Hz	NXC-18/N 110V 50Hz	836918
18A	3NO	1NO+1NC	AC 127V 50Hz	NXC-18/N 127V 50Hz	836919
18A	3NO	1NO+1NC	AC 220V 50Hz	NXC-18/N 220V 50Hz	836920
18A	3NO	1NO+1NC	AC 380V 50Hz	NXC-18/N 380V 50Hz	836921
18A	3NO	1NO+1NC	AC 415V 50Hz	NXC-18/N 415V 50Hz	836922
18A	3NO	1NO+1NC	AC 110V 50/60Hz	NXC-18/N 110V 50/60Hz	925631
18A	3NO	1NO+1NC	AC 110V 60Hz	NXC-18/N 110V 60Hz	925633
18A	3NO	1NO+1NC	AC 127V 50/60Hz	NXC-18/N 127V 50/60Hz	925635
18A	3NO	1NO+1NC	AC 127V 60Hz	NXC-18/N 127V 60Hz	925637
18A	3NO	1NO+1NC	AC 220V 50/60Hz	NXC-18/N 220V 50/60Hz	925639
18A	3NO	1NO+1NC	AC 220V 60Hz	NXC-18/N 220V 60Hz	925641
18A	3NO	1NO+1NC	AC 24V 50/60Hz	NXC-18/N 24V 50/60Hz	925643
18A	3NO	1NO+1NC	AC 24V 60Hz	NXC-18/N 24V 60Hz	925645
18A	3NO	1NO+1NC	AC 380V 50/60Hz	NXC-18/N 380V 50/60Hz	925651
18A	3NO	1NO+1NC	AC 380V 60Hz	NXC-18/N 380V 60Hz	925653
18A	3NO	1NO+1NC	AC 415V 50/60Hz	NXC-18/N 415V 50/60Hz	925655
18A	3NO	1NO+1NC	AC 415V 60Hz	NXC-18/N 415V 60Hz	925657
18A	3NO	1NO+1NC	AC 230V 50Hz	NXC-18/N 230V 50Hz	938609
18A	3NO	1NO+1NC	AC 230V 50/60Hz	NXC-18/N 230V 50/60Hz	938610
18A	3NO	1NO+1NC	AC 230V 60Hz	NXC-18/N 230V 60Hz	938611
18A	3NO	1NO+1NC	AC 240V 50Hz	NXC-18/N 240V 50Hz	938621
18A	3NO	1NO+1NC	AC 240V 50/60Hz	NXC-18/N 240V 50/60Hz	938622
18A	3NO	1NO+1NC	AC 240V 60Hz	NXC-18/N 240V 60Hz	938623
18A	3NO	1NO+1NC	AC 400V 50Hz	NXC-18/N 400V 50Hz	938645
18A	3NO	1NO+1NC	AC 400V 50/60Hz	NXC-18/N 400V 50/60Hz	938646
18A	3NO	1NO+1NC	AC 400V 60Hz	NXC-18/N 400V 60Hz	938647
18A	3NO	1NO+1NC	AC 440V 50Hz	NXC-18/N 440V 50Hz	938657
18A	3NO	1NO+1NC	AC 440V 50/60Hz	NXC-18/N 440V 50/60Hz	938658
18A	3NO	1NO+1NC	AC 440V 60Hz	NXC-18/N 440V 60Hz	938659

AC-3 Current	Main Contacts	Auxiliary Contacts	Coil	Model Description	Code
22A	3NO	1NO+1NC	AC 24V 50Hz	NXC-22 24V 50Hz	836907
22A	3NO	1NO+1NC	AC 110V 50Hz	NXC-22 110V 50Hz	836910
22A	3NO	1NO+1NC	AC 127V 50Hz	NXC-22 127V 50Hz	836911
22A	3NO	1NO+1NC	AC 220V 50Hz	NXC-22 220V 50Hz	836912
22A	3NO	1NO+1NC	AC 380V 50Hz	NXC-22 380V 50Hz	836913
22A	3NO	1NO+1NC	AC 415V 50Hz	NXC-22 415V 50Hz	836914
22A	3NO	1NO+1NC	AC 110V 50/60Hz	NXC-22 110V 50/60Hz	925663
22A	3NO	1NO+1NC	AC 110V 60Hz	NXC-22 110V 60Hz	925665
22A	3NO	1NO+1NC	AC 127V 50/60Hz	NXC-22 127V 50/60Hz	925667
22A	3NO	1NO+1NC	AC 127V 60Hz	NXC-22 127V 60Hz	925669
22A	3NO	1NO+1NC	AC 220V 50/60Hz	NXC-22 220V 50/60Hz	925671
22A	3NO	1NO+1NC	AC 220V 60Hz	NXC-22 220V 60Hz	925673
22A	3NO	1NO+1NC	AC 24V 50/60Hz	NXC-22 24V 50/60Hz	925675
22A	3NO	1NO+1NC	AC 24V 60Hz	NXC-22 24V 60Hz	925677
22A	3NO	1NO+1NC	AC 380V 50/60Hz	NXC-22 380V 50/60Hz	925683
22A	3NO	1NO+1NC	AC 380V 60Hz	NXC-22 380V 60Hz	925685
22A	3NO	1NO+1NC	AC 415V 50/60Hz	NXC-22 415V 50/60Hz	925687
22A	3NO	1NO+1NC	AC 415V 60Hz	NXC-22 415V 60Hz	925689
22A	3NO	1NO+1NC	AC 230V 50/60Hz	NXC-22 230V 50/60Hz	938249
22A	3NO	1NO+1NC	AC 230V 50Hz	NXC-22 230V 50Hz	938531
22A	3NO	1NO+1NC	AC 230V 60Hz	NXC-22 230V 60Hz	938533
22A	3NO	1NO+1NC	AC 240V 50Hz	NXC-22 240V 50Hz	938543
22A	3NO	1NO+1NC	AC 240V 50/60Hz	NXC-22 240V 50/60Hz	938544
22A	3NO	1NO+1NC	AC 240V 60Hz	NXC-22 240V 60Hz	938545
22A	3NO	1NO+1NC	AC 400V 50Hz	NXC-22 400V 50Hz	938567
22A	3NO	1NO+1NC	AC 400V 50/60Hz	NXC-22 400V 50/60Hz	938568
22A	3NO	1NO+1NC	AC 400V 60Hz	NXC-22 400V 60Hz	938569
22A	3NO	1NO+1NC	AC 440V 50Hz	NXC-22 440V 50Hz	938579
22A	3NO	1NO+1NC	AC 440V 50/60Hz	NXC-22 440V 50/60Hz	938580
22A	3NO	1NO+1NC	AC 440V 60Hz	NXC-22 440V 60Hz	938581

AC-3 Current	Main Contacts	Auxiliary Contacts	Coil	Model Description	Code
22A	3NO	1NO+1NC	AC 24V 50Hz	NXC-22/N 24V 50Hz	836923
22A	3NO	1NO+1NC	AC 110V 50Hz	NXC-22/N 110V 50Hz	836926
22A	3NO	1NO+1NC	AC 127V 50Hz	NXC-22/N 127V 50Hz	836927
22A	3NO	1NO+1NC	AC 220V 50Hz	NXC-22/N 220V 50Hz	836928
22A	3NO	1NO+1NC	AC 380V 50Hz	NXC-22/N 380V 50Hz	836929
22A	3NO	1NO+1NC	AC 415V 50Hz	NXC-22/N 415V 50Hz	836930
22A	3NO	1NO+1NC	AC 110V 50/60Hz	NXC-22/N 110V 50/60Hz	925695
22A	3NO	1NO+1NC	AC 110V 60Hz	NXC-22/N 110V 60Hz	925697
22A	3NO	1NO+1NC	AC 127V 50/60Hz	NXC-22/N 127V 50/60Hz	925699
22A	3NO	1NO+1NC	AC 127V 60Hz	NXC-22/N 127V 60Hz	925701
22A	3NO	1NO+1NC	AC 220V 50/60Hz	NXC-22/N 220V 50/60Hz	925703
22A	3NO	1NO+1NC	AC 220V 60Hz	NXC-22/N 220V 60Hz	925705
22A	3NO	1NO+1NC	AC 24V 50/60Hz	NXC-22/N 24V 50/60Hz	925707
22A	3NO	1NO+1NC	AC 24V 60Hz	NXC-22/N 24V 60Hz	925709
22A	3NO	1NO+1NC	AC 380V 50/60Hz	NXC-22/N 380V 50/60Hz	925715
22A	3NO	1NO+1NC	AC 380V 60Hz	NXC-22/N 380V 60Hz	925717
22A	3NO	1NO+1NC	AC 415V 50/60Hz	NXC-22/N 415V 50/60Hz	925719
22A	3NO	1NO+1NC	AC 415V 60Hz	NXC-22/N 415V 60Hz	925721
22A	3NO	1NO+1NC	AC 230V 50Hz	NXC-22/N 230V 50Hz	938615
22A	3NO	1NO+1NC	AC 230V 50/60Hz	NXC-22/N 230V 50/60Hz	938616
22A	3NO	1NO+1NC	AC 230V 60Hz	NXC-22/N 230V 60Hz	938617
22A	3NO	1NO+1NC	AC 240V 50Hz	NXC-22/N 240V 50Hz	938627
22A	3NO	1NO+1NC	AC 240V 50/60Hz	NXC-22/N 240V 50/60Hz	938628
22A	3NO	1NO+1NC	AC 240V 60Hz	NXC-22/N 240V 60Hz	938629
22A	3NO	1NO+1NC	AC 400V 50Hz	NXC-22/N 400V 50Hz	938651
22A	3NO	1NO+1NC	AC 400V 50/60Hz	NXC-22/N 400V 50/60Hz	938652
22A	3NO	1NO+1NC	AC 400V 60Hz	NXC-22/N 400V 60Hz	938653
22A	3NO	1NO+1NC	AC 440V 50Hz	NXC-22/N 440V 50Hz	938663
22A	3NO	1NO+1NC	AC 440V 50/60Hz	NXC-22/N 440V 50/60Hz	938664
22A	3NO	1NO+1NC	AC 440V 60Hz	NXC-22/N 440V 60Hz	938665

AC-3 Current	Main Contacts	Auxiliary Contacts	Coil	Model Description	Code
25A	3NO	1NO+1NC	AC 220V 50Hz	NXC-25 220V 50Hz	836851
25A	3NO	1NO+1NC	AC 380V 50Hz	NXC-25 380V 50Hz	836857
25A	3NO	1NO+1NC	AC 24V 50Hz	NXC-25 24V 50Hz	836863
25A	3NO	1NO+1NC	AC 110V 50Hz	NXC-25 110V 50Hz	836881
25A	3NO	1NO+1NC	AC 127V 50Hz	NXC-25 127V 50Hz	836887
25A	3NO	1NO+1NC	AC 415V 50Hz	NXC-25 415V 50Hz	836893
25A	3NO	1NO+1NC	AC 110V 50/60Hz	NXC-25 110V 50/60Hz	925727
25A	3NO	1NO+1NC	AC 110V 60Hz	NXC-25 110V 60Hz	925729
25A	3NO	1NO+1NC	AC 127V 50/60Hz	NXC-25 127V 50/60Hz	925731
25A	3NO	1NO+1NC	AC 127V 60Hz	NXC-25 127V 60Hz	925733
25A	3NO	1NO+1NC	AC 220V 50/60Hz	NXC-25 220V 50/60Hz	925735
25A	3NO	1NO+1NC	AC 220V 60Hz	NXC-25 220V 60Hz	925737
25A	3NO	1NO+1NC	AC 24V 50/60Hz	NXC-25 24V 50/60Hz	925739
25A	3NO	1NO+1NC	AC 24V 60Hz	NXC-25 24V 60Hz	925741
25A	3NO	1NO+1NC	AC 380V 50/60Hz	NXC-25 380V 50/60Hz	925747
25A	3NO	1NO+1NC	AC 380V 60Hz	NXC-25 380V 60Hz	925749
25A	3NO	1NO+1NC	AC 415V 50/60Hz	NXC-25 415V 50/60Hz	925751
25A	3NO	1NO+1NC	AC 415V 60Hz	NXC-25 415V 60Hz	925753
25A	3NO	1NO+1NC	AC 230V 50/60Hz	NXC-25 230V 50/60Hz	938244
25A	3NO	1NO+1NC	AC 230V 50Hz	NXC-25 230V 50Hz	938281
25A	3NO	1NO+1NC	AC 230V 60Hz	NXC-25 230V 60Hz	938282
25A	3NO	1NO+1NC	AC 240V 50Hz	NXC-25 240V 50Hz	938297
25A	3NO	1NO+1NC	AC 240V 50/60Hz	NXC-25 240V 50/60Hz	938298
25A	3NO	1NO+1NC	AC 240V 60Hz	NXC-25 240V 60Hz	938299
25A	3NO	1NO+1NC	AC 400V 50Hz	NXC-25 400V 50Hz	938333
25A	3NO	1NO+1NC	AC 400V 50/60Hz	NXC-25 400V 50/60Hz	938334
25A	3NO	1NO+1NC	AC 400V 60Hz	NXC-25 400V 60Hz	938335
25A	3NO	1NO+1NC	AC 440V 50Hz	NXC-25 440V 50Hz	938351
25A	3NO	1NO+1NC	AC 440V 50/60Hz	NXC-25 440V 50/60Hz	938352
25A	3NO	1NO+1NC	AC 440V 60Hz	NXC-25 440V 60Hz	938353
25A	3NO	1NO+1NC	AC 220V 50Hz	NXC-25/N 220V 50Hz	836854
25A	3NO	1NO+1NC	AC 380V 50Hz	NXC-25/N 380V 50Hz	836860
25A	3NO	1NO+1NC	AC 24V 50Hz	NXC-25/N 24V 50Hz	836866
25A	3NO	1NO+1NC	AC 110V 50Hz	NXC-25/N 110V 50Hz	836884
25A	3NO	1NO+1NC	AC 127V 50Hz	NXC-25/N 127V 50Hz	836890
25A	3NO	1NO+1NC	AC 415V 50Hz	NXC-25/N 415V 50Hz	836896
25A	3NO	1NO+1NC	AC 110V 50/60Hz	NXC-25/N 110V 50/60Hz	925759
25A	3NO	1NO+1NC	AC 110V 60Hz	NXC-25/N 110V 60Hz	925761
25A	3NO	1NO+1NC	AC 127V 50/60Hz	NXC-25/N 127V 50/60Hz	925763
25A	3NO	1NO+1NC	AC 127V 60Hz	NXC-25/N 127V 60Hz	925765
25A	3NO	1NO+1NC	AC 220V 50/60Hz	NXC-25/N 220V 50/60Hz	925767
25A	3NO	1NO+1NC	AC 220V 60Hz	NXC-25/N 220V 60Hz	925769

AC-3 Current	Main Contacts	Auxiliary Contacts	Coil	Model Description	Code
25A	3NO	1NO+1NC	AC 24V 50/60Hz	NXC-25/N 24V 50/60Hz	925771
25A	3NO	1NO+1NC	AC 24V 60Hz	NXC-25/N 24V 60Hz	925773
25A	3NO	1NO+1NC	AC 380V 50/60Hz	NXC-25/N 380V 50/60Hz	925779
25A	3NO	1NO+1NC	AC 380V 60Hz	NXC-25/N 380V 60Hz	925781
25A	3NO	1NO+1NC	AC 415V 50/60Hz	NXC-25/N 415V 50/60Hz	925783
25A	3NO	1NO+1NC	AC 415V 60Hz	NXC-25/N 415V 60Hz	925785
25A	3NO	1NO+1NC	AC 230V 50Hz	NXC-25/N 230V 50Hz	938405
25A	3NO	1NO+1NC	AC 230V 50/60Hz	NXC-25/N 230V 50/60Hz	938406
25A	3NO	1NO+1NC	AC 230V 60Hz	NXC-25/N 230V 60Hz	938407
25A	3NO	1NO+1NC	AC 240V 50Hz	NXC-25/N 240V 50Hz	938423
25A	3NO	1NO+1NC	AC 240V 50/60Hz	NXC-25/N 240V 50/60Hz	938424
25A	3NO	1NO+1NC	AC 240V 60Hz	NXC-25/N 240V 60Hz	938425
25A	3NO	1NO+1NC	AC 400V 50Hz	NXC-25/N 400V 50Hz	938459
25A	3NO	1NO+1NC	AC 400V 50/60Hz	NXC-25/N 400V 50/60Hz	938460
25A	3NO	1NO+1NC	AC 400V 60Hz	NXC-25/N 400V 60Hz	938461
25A	3NO	1NO+1NC	AC 440V 50Hz	NXC-25/N 440V 50Hz	938477
25A	3NO	1NO+1NC	AC 440V 50/60Hz	NXC-25/N 440V 50/60Hz	938478
25A	3NO	1NO+1NC	AC 440V 60Hz	NXC-25/N 440V 60Hz	938479
25A	2NO+2NC	-	AC 415V 60Hz	NXC-25/22 415V 60Hz	301853
25A	2NO+2NC	-	AC 380V 60Hz	NXC-25/22 380V 60Hz	301858
25A	2NO+2NC	-	AC 127V 60Hz	NXC-25/22 127V 60Hz	301864
25A	2NO+2NC	-	AC 220V 60Hz	NXC-25/22 220V 60Hz	301870
25A	2NO+2NC	-	AC 380V 50/60Hz	NXC-25/22 380V 50/60Hz	301880
25A	2NO+2NC	-	AC 127V 50/60Hz	NXC-25/22 127V 50/60Hz	301883
25A	2NO+2NC	-	AC 24V 60Hz	NXC-25/22 24V 60Hz	301885
25A	2NO+2NC	-	AC 220V 50/60Hz	NXC-25/22 220V 50/60Hz	301900
25A	2NO+2NC	-	AC 110V 50/60Hz	NXC-25/22 110V 50/60Hz	301913
25A	2NO+2NC	-	AC 24V 50/60Hz	NXC-25/22 24V 50/60Hz	301920
25A	2NO+2NC	-	AC 110V 60Hz	NXC-25/22 110V 60Hz	301925
25A	2NO+2NC	-	AC 415V 50/60Hz	NXC-25/22 415V 50/60Hz	301930
25A	4NO	-	AC 415V 50/60Hz	NXC-25/4 415V 50/60Hz	301848
25A	4NO	-	AC 127V 60Hz	NXC-25/4 127V 60Hz	301862
25A	4NO	-	AC 380V 60Hz	NXC-25/4 380V 60Hz	301863
25A	4NO	-	AC 415V 60Hz	NXC-25/4 415V 60Hz	301872
25A	4NO	-	AC 127V 50/60Hz	NXC-25/4 127V 50/60Hz	301876
25A	4NO	-	AC 220V 50/60Hz	NXC-25/4 220V 50/60Hz	301877
25A	4NO	-	AC 24V 50/60Hz	NXC-25/4 24V 50/60Hz	301914
25A	4NO	-	AC 110V 50/60Hz	NXC-25/4 110V 50/60Hz	301922
25A	4NO	-	AC 110V 60Hz	NXC-25/4 110V 60Hz	301928
25A	4NO	-	AC 220V 60Hz	NXC-25/4 220V 60Hz	301935
25A	4NO	-	AC 380V 50/60Hz	NXC-25/4 380V 50/60Hz	301936
25A	4NO	-	AC 24V 60Hz	NXC-25/4 24V 60Hz	301939

AC-3 Current	Main Contacts	Auxiliary Contacts	Coil	Model Description	Code
32A	3NO	1NO+1NC	AC 220V 50Hz	NXC-32 220V 50Hz	836852
32A	3NO	1NO+1NC	AC 380V 50Hz	NXC-32 380V 50Hz	836858
32A	3NO	1NO+1NC	AC 24V 50Hz	NXC-32 24V 50Hz	836864
32A	3NO	1NO+1NC	AC 110V 50Hz	NXC-32 110V 50Hz	836882
32A	3NO	1NO+1NC	AC 127V 50Hz	NXC-32 127V 50Hz	836888
32A	3NO	1NO+1NC	AC 415V 50Hz	NXC-32 415V 50Hz	836894
32A	3NO	1NO+1NC	AC 220V 60Hz	NXC-32 220V 60Hz	925212
32A	3NO	1NO+1NC	AC 220V 50/60Hz	NXC-32 220V 50/60Hz	925213
32A	3NO	1NO+1NC	AC 110V 50/60Hz	NXC-32 110V 50/60Hz	925791
32A	3NO	1NO+1NC	AC 110V 60Hz	NXC-32 110V 60Hz	925793
32A	3NO	1NO+1NC	AC 127V 50/60Hz	NXC-32 127V 50/60Hz	925795
32A	3NO	1NO+1NC	AC 127V 60Hz	NXC-32 127V 60Hz	925797
32A	3NO	1NO+1NC	AC 24V 50/60Hz	NXC-32 24V 50/60Hz	925799
32A	3NO	1NO+1NC	AC 24V 60Hz	NXC-32 24V 60Hz	925801
32A	3NO	1NO+1NC	AC 380V 50/60Hz	NXC-32 380V 50/60Hz	925807
32A	3NO	1NO+1NC	AC 380V 60Hz	NXC-32 380V 60Hz	925809
32A	3NO	1NO+1NC	AC 415V 50/60Hz	NXC-32 415V 50/60Hz	925811
32A	3NO	1NO+1NC	AC 415V 60Hz	NXC-32 415V 60Hz	925813
32A	3NO	1NO+1NC	AC 230V 50Hz	NXC-32 230V 50Hz	938286
32A	3NO	1NO+1NC	AC 230V 50/60Hz	NXC-32 230V 50/60Hz	938287
32A	3NO	1NO+1NC	AC 230V 60Hz	NXC-32 230V 60Hz	938288
32A	3NO	1NO+1NC	AC 240V 50Hz	NXC-32 240V 50Hz	938303
32A	3NO	1NO+1NC	AC 240V 50/60Hz	NXC-32 240V 50/60Hz	938304
32A	3NO	1NO+1NC	AC 240V 60Hz	NXC-32 240V 60Hz	938305
32A	3NO	1NO+1NC	AC 400V 50Hz	NXC-32 400V 50Hz	938339
32A	3NO	1NO+1NC	AC 400V 50/60Hz	NXC-32 400V 50/60Hz	938340
32A	3NO	1NO+1NC	AC 400V 60Hz	NXC-32 400V 60Hz	938341
32A	3NO	1NO+1NC	AC 440V 50Hz	NXC-32 440V 50Hz	938357
32A	3NO	1NO+1NC	AC 440V 50/60Hz	NXC-32 440V 50/60Hz	938358
32A	3NO	1NO+1NC	AC 440V 60Hz	NXC-32 440V 60Hz	938359

AC-3 Current	Main Contacts	Auxiliary Contacts	Coil	Model Description	Code
32A	3NO	1NO+1NC	AC 220V 50Hz	NXC-32/N 220V 50Hz	836855
32A	3NO	1NO+1NC	AC 380V 50Hz	NXC-32/N 380V 50Hz	836861
32A	3NO	1NO+1NC	AC 24V 50Hz	NXC-32/N 24V 50Hz	836867
32A	3NO	1NO+1NC	AC 110V 50Hz	NXC-32/N 110V 50Hz	836885
32A	3NO	1NO+1NC	AC 127V 50Hz	NXC-32/N 127V 50Hz	836891
32A	3NO	1NO+1NC	AC 415V 50Hz	NXC-32/N 415V 50Hz	836897
32A	3NO	1NO+1NC	AC 110V 50/60Hz	NXC-32/N 110V 50/60Hz	925819
32A	3NO	1NO+1NC	AC 110V 60Hz	NXC-32/N 110V 60Hz	925821
32A	3NO	1NO+1NC	AC 127V 50/60Hz	NXC-32/N 127V 50/60Hz	925823
32A	3NO	1NO+1NC	AC 127V 60Hz	NXC-32/N 127V 60Hz	925825
32A	3NO	1NO+1NC	AC 220V 50/60Hz	NXC-32/N 220V 50/60Hz	925827
32A	3NO	1NO+1NC	AC 220V 60Hz	NXC-32/N 220V 60Hz	925829
32A	3NO	1NO+1NC	AC 24V 50/60Hz	NXC-32/N 24V 50/60Hz	925831
32A	3NO	1NO+1NC	AC 24V 60Hz	NXC-32/N 24V 60Hz	925833
32A	3NO	1NO+1NC	AC 380V 50/60Hz	NXC-32/N 380V 50/60Hz	925839
32A	3NO	1NO+1NC	AC 380V 60Hz	NXC-32/N 380V 60Hz	925841
32A	3NO	1NO+1NC	AC 415V 50/60Hz	NXC-32/N 415V 50/60Hz	925843
32A	3NO	1NO+1NC	AC 415V 60Hz	NXC-32/N 415V 60Hz	925845
32A	3NO	1NO+1NC	AC 230V 50Hz	NXC-32/N 230V 50Hz	938411
32A	3NO	1NO+1NC	AC 230V 50/60Hz	NXC-32/N 230V 50/60Hz	938412
32A	3NO	1NO+1NC	AC 230V 60Hz	NXC-32/N 230V 60Hz	938413
32A	3NO	1NO+1NC	AC 240V 50Hz	NXC-32/N 240V 50Hz	938429
32A	3NO	1NO+1NC	AC 240V 50/60Hz	NXC-32/N 240V 50/60Hz	938430
32A	3NO	1NO+1NC	AC 240V 60Hz	NXC-32/N 240V 60Hz	938431
32A	3NO	1NO+1NC	AC 400V 50Hz	NXC-32/N 400V 50Hz	938465
32A	3NO	1NO+1NC	AC 400V 50/60Hz	NXC-32/N 400V 50/60Hz	938466
32A	3NO	1NO+1NC	AC 400V 60Hz	NXC-32/N 400V 60Hz	938467
32A	3NO	1NO+1NC	AC 440V 50Hz	NXC-32/N 440V 50Hz	938483
32A	3NO	1NO+1NC	AC 440V 50/60Hz	NXC-32/N 440V 50/60Hz	938484
32A	3NO	1NO+1NC	AC 440V 60Hz	NXC-32/N 440V 60Hz	938485

AC-3 Current	Main Contacts	Auxiliary Contacts	Coil	Model Description	Code
38A	3NO	1NO+1NC	AC 220V 50Hz	NXC-38 220V 50Hz	836853
38A	3NO	1NO+1NC	AC 380V 50Hz	NXC-38 380V 50Hz	836859
38A	3NO	1NO+1NC	AC 24V 50Hz	NXC-38 24V 50Hz	836865
38A	3NO	1NO+1NC	AC 110V 50Hz	NXC-38 110V 50Hz	836883
38A	3NO	1NO+1NC	AC 127V 50Hz	NXC-38 127V 50Hz	836889
38A	3NO	1NO+1NC	AC 415V 50Hz	NXC-38 415V 50Hz	836895
38A	3NO	1NO+1NC	AC 110V 50/60Hz	NXC-38 110V 50/60Hz	925851
38A	3NO	1NO+1NC	AC 110V 60Hz	NXC-38 110V 60Hz	925853
38A	3NO	1NO+1NC	AC 127V 50/60Hz	NXC-38 127V 50/60Hz	925855
38A	3NO	1NO+1NC	AC 127V 60Hz	NXC-38 127V 60Hz	925857
38A	3NO	1NO+1NC	AC 220V 50/60Hz	NXC-38 220V 50/60Hz	925859
38A	3NO	1NO+1NC	AC 220V 60Hz	NXC-38 220V 60Hz	925861
38A	3NO	1NO+1NC	AC 24V 50/60Hz	NXC-38 24V 50/60Hz	925863
38A	3NO	1NO+1NC	AC 24V 60Hz	NXC-38 24V 60Hz	925865
38A	3NO	1NO+1NC	AC 380V 50/60Hz	NXC-38 380V 50/60Hz	925871
38A	3NO	1NO+1NC	AC 380V 60Hz	NXC-38 380V 60Hz	925873
38A	3NO	1NO+1NC	AC 415V 50/60Hz	NXC-38 415V 50/60Hz	925875
38A	3NO	1NO+1NC	AC 415V 60Hz	NXC-38 415V 60Hz	925877
38A	3NO	1NO+1NC	AC 230V 50/60Hz	NXC-38 230V 50/60Hz	938245
38A	3NO	1NO+1NC	AC 230V 50Hz	NXC-38 230V 50Hz	938292
38A	3NO	1NO+1NC	AC 230V 60Hz	NXC-38 230V 60Hz	938293
38A	3NO	1NO+1NC	AC 240V 50Hz	NXC-38 240V 50Hz	938309
38A	3NO	1NO+1NC	AC 240V 50/60Hz	NXC-38 240V 50/60Hz	938310
38A	3NO	1NO+1NC	AC 240V 60Hz	NXC-38 240V 60Hz	938311
38A	3NO	1NO+1NC	AC 400V 50Hz	NXC-38 400V 50Hz	938345
38A	3NO	1NO+1NC	AC 400V 50/60Hz	NXC-38 400V 50/60Hz	938346
38A	3NO	1NO+1NC	AC 400V 60Hz	NXC-38 400V 60Hz	938347
38A	3NO	1NO+1NC	AC 440V 50Hz	NXC-38 440V 50Hz	938363
38A	3NO	1NO+1NC	AC 440V 50/60Hz	NXC-38 440V 50/60Hz	938364
38A	3NO	1NO+1NC	AC 440V 60Hz	NXC-38 440V 60Hz	938365

AC-3 Current	Main Contacts	Auxiliary Contacts	Coil	Model Description	Code
38A	3NO	1NO+1NC	AC 220V 50Hz	NXC-38/N 220V 50Hz	836856
38A	3NO	1NO+1NC	AC 380V 50Hz	NXC-38/N 380V 50Hz	836862
38A	3NO	1NO+1NC	AC 24V 50Hz	NXC-38/N 24V 50Hz	836868
38A	3NO	1NO+1NC	AC 110V 50Hz	NXC-38/N 110V 50Hz	836886
38A	3NO	1NO+1NC	AC 127V 50Hz	NXC-38/N 127V 50Hz	836892
38A	3NO	1NO+1NC	AC 415V 50Hz	NXC-38/N 415V 50Hz	836898
38A	3NO	1NO+1NC	AC 110V 50/60Hz	NXC-38/N 110V 50/60Hz	925883
38A	3NO	1NO+1NC	AC 110V 60Hz	NXC-38/N 110V 60Hz	925885
38A	3NO	1NO+1NC	AC 127V 50/60Hz	NXC-38/N 127V 50/60Hz	925887
38A	3NO	1NO+1NC	AC 127V 60Hz	NXC-38/N 127V 60Hz	925889
38A	3NO	1NO+1NC	AC 220V 50/60Hz	NXC-38/N 220V 50/60Hz	925891
38A	3NO	1NO+1NC	AC 220V 60Hz	NXC-38/N 220V 60Hz	925893
38A	3NO	1NO+1NC	AC 24V 50/60Hz	NXC-38/N 24V 50/60Hz	925895
38A	3NO	1NO+1NC	AC 24V 60Hz	NXC-38/N 24V 60Hz	925897
38A	3NO	1NO+1NC	AC 380V 50/60Hz	NXC-38/N 380V 50/60Hz	925903
38A	3NO	1NO+1NC	AC 380V 60Hz	NXC-38/N 380V 60Hz	925905
38A	3NO	1NO+1NC	AC 415V 50/60Hz	NXC-38/N 415V 50/60Hz	925907
38A	3NO	1NO+1NC	AC 415V 60Hz	NXC-38/N 415V 60Hz	925909
38A	3NO	1NO+1NC	AC 230V 50Hz	NXC-38/N 230V 50Hz	938417
38A	3NO	1NO+1NC	AC 230V 50/60Hz	NXC-38/N 230V 50/60Hz	938418
38A	3NO	1NO+1NC	AC 230V 60Hz	NXC-38/N 230V 60Hz	938419
38A	3NO	1NO+1NC	AC 240V 50Hz	NXC-38/N 240V 50Hz	938435
38A	3NO	1NO+1NC	AC 240V 50/60Hz	NXC-38/N 240V 50/60Hz	938436
38A	3NO	1NO+1NC	AC 240V 60Hz	NXC-38/N 240V 60Hz	938437
38A	3NO	1NO+1NC	AC 400V 50Hz	NXC-38/N 400V 50Hz	938471
38A	3NO	1NO+1NC	AC 400V 50/60Hz	NXC-38/N 400V 50/60Hz	938472
38A	3NO	1NO+1NC	AC 400V 60Hz	NXC-38/N 400V 60Hz	938473
38A	3NO	1NO+1NC	AC 440V 50Hz	NXC-38/N 440V 50Hz	938489
38A	3NO	1NO+1NC	AC 440V 50/60Hz	NXC-38/N 440V 50/60Hz	938490
38A	3NO	1NO+1NC	AC 440V 60Hz	NXC-38/N 440V 60Hz	938491

AC-3 Current	Main Contacts	Auxiliary Contacts	Coil	Model Description	Code
40A	3NO	1NO+1NC	AC 380V 50Hz	NXC-40 380V 50Hz	836779
40A	3NO	1NO+1NC	AC 220V 50Hz	NXC-40 220V 50Hz	836780
40A	3NO	1NO+1NC	AC 110V 50Hz	NXC-40 110V 50Hz	836781
40A	3NO	1NO+1NC	AC 24V 50Hz	NXC-40 24V 50Hz	836782
40A	3NO	1NO+1NC	AC 127V 50Hz	NXC-40 127V 50Hz	836785
40A	3NO	1NO+1NC	AC 415V 50Hz	NXC-40 415V 50Hz	836786
40A	3NO	1NO+1NC	AC 110V 50/60Hz	NXC-40 110V 50/60Hz	925915
40A	3NO	1NO+1NC	AC 110V 60Hz	NXC-40 110V 60Hz	925917
40A	3NO	1NO+1NC	AC 127V 50/60Hz	NXC-40 127V 50/60Hz	925919
40A	3NO	1NO+1NC	AC 127V 60Hz	NXC-40 127V 60Hz	925921
40A	3NO	1NO+1NC	AC 220V 50/60Hz	NXC-40 220V 50/60Hz	925923
40A	3NO	1NO+1NC	AC 220V 60Hz	NXC-40 220V 60Hz	925925
40A	3NO	1NO+1NC	AC 24V 50/60Hz	NXC-40 24V 50/60Hz	925927
40A	3NO	1NO+1NC	AC 24V 60Hz	NXC-40 24V 60Hz	925929
40A	3NO	1NO+1NC	AC 380V 50/60Hz	NXC-40 380V 50/60Hz	925935
40A	3NO	1NO+1NC	AC 380V 60Hz	NXC-40 380V 60Hz	925937
40A	3NO	1NO+1NC	AC 415V 50/60Hz	NXC-40 415V 50/60Hz	925939
40A	3NO	1NO+1NC	AC 415V 60Hz	NXC-40 415V 60Hz	925941
40A	3NO	1NO+1NC	AC 230V 50Hz	NXC-40 230V 50Hz	956039
40A	3NO	1NO+1NC	AC 230V 50/60Hz	NXC-40 230V 50/60Hz	956040
40A	3NO	1NO+1NC	AC 230V 60Hz	NXC-40 230V 60Hz	956041
40A	3NO	1NO+1NC	AC 240V 50Hz	NXC-40 240V 50Hz	956056
40A	3NO	1NO+1NC	AC 240V 50/60Hz	NXC-40 240V 50/60Hz	956057
40A	3NO	1NO+1NC	AC 240V 60Hz	NXC-40 240V 60Hz	956058
40A	3NO	1NO+1NC	AC 400V 50Hz	NXC-40 400V 50Hz	956092
40A	3NO	1NO+1NC	AC 400V 50/60Hz	NXC-40 400V 50/60Hz	956093
40A	3NO	1NO+1NC	AC 400V 60Hz	NXC-40 400V 60Hz	956094
40A	3NO	1NO+1NC	AC 440V 50Hz	NXC-40 440V 50Hz	956110
40A	3NO	1NO+1NC	AC 440V 50/60Hz	NXC-40 440V 50/60Hz	956111
40A	3NO	1NO+1NC	AC 440V 60Hz	NXC-40 440V 60Hz	956112
40A	3NO	1NO+1NC	AC 380V 50Hz	NXC-40/N 380V 50Hz	836755
40A	3NO	1NO+1NC	AC 220V 50Hz	NXC-40/N 220V 50Hz	836756
40A	3NO	1NO+1NC	AC 110V 50Hz	NXC-40/N 110V 50Hz	836757
40A	3NO	1NO+1NC	AC 24V 50Hz	NXC-40/N 24V 50Hz	836758
40A	3NO	1NO+1NC	AC 127V 50Hz	NXC-40/N 127V 50Hz	836761
40A	3NO	1NO+1NC	AC 415V 50Hz	NXC-40/N 415V 50Hz	836762
40A	3NO	1NO+1NC	AC 110V 50/60Hz	NXC-40/N 110V 50/60Hz	925947
40A	3NO	1NO+1NC	AC 110V 60Hz	NXC-40/N 110V 60Hz	925949
40A	3NO	1NO+1NC	AC 127V 50/60Hz	NXC-40/N 127V 50/60Hz	925951
40A	3NO	1NO+1NC	AC 127V 60Hz	NXC-40/N 127V 60Hz	925953
40A	3NO	1NO+1NC	AC 220V 50/60Hz	NXC-40/N 220V 50/60Hz	925955
40A	3NO	1NO+1NC	AC 220V 60Hz	NXC-40/N 220V 60Hz	925957

AC-3 Current	Main Contacts	Auxiliary Contacts	Coil	Model Description	Code
40A	3NO	1NO+1NC	AC 24V 50/60Hz	NXC-40/N 24V 50/60Hz	925959
40A	3NO	1NO+1NC	AC 24V 60Hz	NXC-40/N 24V 60Hz	925961
40A	3NO	1NO+1NC	AC 380V 50/60Hz	NXC-40/N 380V 50/60Hz	925967
40A	3NO	1NO+1NC	AC 380V 60Hz	NXC-40/N 380V 60Hz	925969
40A	3NO	1NO+1NC	AC 415V 50/60Hz	NXC-40/N 415V 50/60Hz	925971
40A	3NO	1NO+1NC	AC 415V 60Hz	NXC-40/N 415V 60Hz	925973
40A	3NO	1NO+1NC	AC 230V 50Hz	NXC-40/N 230V 50Hz	956164
40A	3NO	1NO+1NC	AC 230V 50/60Hz	NXC-40/N 230V 50/60Hz	956165
40A	3NO	1NO+1NC	AC 230V 60Hz	NXC-40/N 230V 60Hz	956166
40A	3NO	1NO+1NC	AC 240V 50Hz	NXC-40/N 240V 50Hz	956182
40A	3NO	1NO+1NC	AC 240V 50/60Hz	NXC-40/N 240V 50/60Hz	956183
40A	3NO	1NO+1NC	AC 240V 60Hz	NXC-40/N 240V 60Hz	956184
40A	3NO	1NO+1NC	AC 400V 50Hz	NXC-40/N 400V 50Hz	956218
40A	3NO	1NO+1NC	AC 400V 50/60Hz	NXC-40/N 400V 50/60Hz	956219
40A	3NO	1NO+1NC	AC 400V 60Hz	NXC-40/N 400V 60Hz	956220
40A	3NO	1NO+1NC	AC 440V 50Hz	NXC-40/N 440V 50Hz	956236
40A	3NO	1NO+1NC	AC 440V 50/60Hz	NXC-40/N 440V 50/60Hz	956237
40A	3NO	1NO+1NC	AC 440V 60Hz	NXC-40/N 440V 60Hz	956238
40A	2NO+2NC	-	AC 24V 50/60Hz	NXC-40/22 24V 50/60Hz	300146
40A	2NO+2NC	-	AC 110V 50/60Hz	NXC-40/22 110V 50/60Hz	300149
40A	2NO+2NC	-	AC 127V 50/60Hz	NXC-40/22 127V 50/60Hz	300150
40A	2NO+2NC	-	AC 220V 50/60Hz	NXC-40/22 220V 50/60Hz	300151
40A	2NO+2NC	-	AC 380V 50/60Hz	NXC-40/22 380V 50/60Hz	300152
40A	2NO+2NC	-	AC 415V 50/60Hz	NXC-40/22 415V 50/60Hz	300153
40A	2NO+2NC	-	AC 24V 60Hz	NXC-40/22 24V 60Hz	300154
40A	2NO+2NC	-	AC 110V 60Hz	NXC-40/22 110V 60Hz	300157
40A	2NO+2NC	-	AC 127V 60Hz	NXC-40/22 127V 60Hz	300158
40A	2NO+2NC	-	AC 220V 60Hz	NXC-40/22 220V 60Hz	300159
40A	2NO+2NC	-	AC 380V 60Hz	NXC-40/22 380V 60Hz	300160
40A	2NO+2NC	-	AC 415V 60Hz	NXC-40/22 415V 60Hz	300161
40A	4NO	-	AC 24V 50/60Hz	NXC-40/4 24V 50/60Hz	299961
40A	4NO	-	AC 110V 50/60Hz	NXC-40/4 110V 50/60Hz	299964
40A	4NO	-	AC 127V 50/60Hz	NXC-40/4 127V 50/60Hz	299965
40A	4NO	-	AC 220V 50/60Hz	NXC-40/4 220V 50/60Hz	299966
40A	4NO	-	AC 380V 50/60Hz	NXC-40/4 380V 50/60Hz	299967
40A	4NO	-	AC 415V 50/60Hz	NXC-40/4 415V 50/60Hz	299968
40A	4NO	-	AC 24V 60Hz	NXC-40/4 24V 60Hz	299969
40A	4NO	-	AC 110V 60Hz	NXC-40/4 110V 60Hz	299972
40A	4NO	-	AC 127V 60Hz	NXC-40/4 127V 60Hz	299973
40A	4NO	-	AC 220V 60Hz	NXC-40/4 220V 60Hz	299974
40A	4NO	-	AC 380V 60Hz	NXC-40/4 380V 60Hz	299975
40A	4NO	-	AC 415V 60Hz	NXC-40/4 415V 60Hz	299976

AC-3 Current	Main Contacts	Auxiliary Contacts	Coil	Model Description	Code
50A	3NO	1NO+1NC	AC 380V 50Hz	NXC-50 380V 50Hz	836787
50A	3NO	1NO+1NC	AC 220V 50Hz	NXC-50 220V 50Hz	836788
50A	3NO	1NO+1NC	AC 110V 50Hz	NXC-50 110V 50Hz	836789
50A	3NO	1NO+1NC	AC 24V 50Hz	NXC-50 24V 50Hz	836790
50A	3NO	1NO+1NC	AC 127V 50Hz	NXC-50 127V 50Hz	836793
50A	3NO	1NO+1NC	AC 415V 50Hz	NXC-50 415V 50Hz	836794
50A	3NO	1NO+1NC	AC 110V 50/60Hz	NXC-50 110V 50/60Hz	925979
50A	3NO	1NO+1NC	AC 110V 60Hz	NXC-50 110V 60Hz	925980
50A	3NO	1NO+1NC	AC 127V 50/60Hz	NXC-50 127V 50/60Hz	925982
50A	3NO	1NO+1NC	AC 127V 60Hz	NXC-50 127V 60Hz	925984
50A	3NO	1NO+1NC	AC 220V 50/60Hz	NXC-50 220V 50/60Hz	925986
50A	3NO	1NO+1NC	AC 220V 60Hz	NXC-50 220V 60Hz	925987
50A	3NO	1NO+1NC	AC 24V 50/60Hz	NXC-50 24V 50/60Hz	925989
50A	3NO	1NO+1NC	AC 24V 60Hz	NXC-50 24V 60Hz	925991
50A	3NO	1NO+1NC	AC 380V 50/60Hz	NXC-50 380V 50/60Hz	925997
50A	3NO	1NO+1NC	AC 380V 60Hz	NXC-50 380V 60Hz	925999
50A	3NO	1NO+1NC	AC 415V 50/60Hz	NXC-50 415V 50/60Hz	938001
50A	3NO	1NO+1NC	AC 415V 60Hz	NXC-50 415V 60Hz	938003
50A	3NO	1NO+1NC	AC 230V 50Hz	NXC-50 230V 50Hz	956045
50A	3NO	1NO+1NC	AC 230V 50/60Hz	NXC-50 230V 50/60Hz	956046
50A	3NO	1NO+1NC	AC 230V 60Hz	NXC-50 230V 60Hz	956047
50A	3NO	1NO+1NC	AC 240V 50Hz	NXC-50 240V 50Hz	956062
50A	3NO	1NO+1NC	AC 240V 50/60Hz	NXC-50 240V 50/60Hz	956063
50A	3NO	1NO+1NC	AC 240V 60Hz	NXC-50 240V 60Hz	956064
50A	3NO	1NO+1NC	AC 400V 50Hz	NXC-50 400V 50Hz	956098
50A	3NO	1NO+1NC	AC 400V 50/60Hz	NXC-50 400V 50/60Hz	956099
50A	3NO	1NO+1NC	AC 400V 60Hz	NXC-50 400V 60Hz	956100
50A	3NO	1NO+1NC	AC 440V 50Hz	NXC-50 440V 50Hz	956116
50A	3NO	1NO+1NC	AC 440V 50/60Hz	NXC-50 440V 50/60Hz	956117
50A	3NO	1NO+1NC	AC 440V 60Hz	NXC-50 440V 60Hz	956118
50A	3NO	1NO+1NC	AC 380V 50Hz	NXC-50/N 380V 50Hz	836763
50A	3NO	1NO+1NC	AC 220V 50Hz	NXC-50/N 220V 50Hz	836764
50A	3NO	1NO+1NC	AC 110V 50Hz	NXC-50/N 110V 50Hz	836765
50A	3NO	1NO+1NC	AC 24V 50Hz	NXC-50/N 24V 50Hz	836766
50A	3NO	1NO+1NC	AC 127V 50Hz	NXC-50/N 127V 50Hz	836769
50A	3NO	1NO+1NC	AC 415V 50Hz	NXC-50/N 415V 50Hz	836770
50A	3NO	1NO+1NC	AC 110V 50/60Hz	NXC-50/N 110V 50/60Hz	938009
50A	3NO	1NO+1NC	AC 110V 60Hz	NXC-50/N 110V 60Hz	938011
50A	3NO	1NO+1NC	AC 127V 50/60Hz	NXC-50/N 127V 50/60Hz	938013
50A	3NO	1NO+1NC	AC 127V 60Hz	NXC-50/N 127V 60Hz	938015
50A	3NO	1NO+1NC	AC 220V 50/60Hz	NXC-50/N 220V 50/60Hz	938017
50A	3NO	1NO+1NC	AC 220V 60Hz	NXC-50/N 220V 60Hz	938019

AC-3 Current	Main Contacts	Auxiliary Contacts	Coil	Model Description	Code
50A	3NO	1NO+1NC	AC 24V 50/60Hz	NXC-50/N 24V 50/60Hz	938021
50A	3NO	1NO+1NC	AC 24V 60Hz	NXC-50/N 24V 60Hz	938023
50A	3NO	1NO+1NC	AC 380V 50/60Hz	NXC-50/N 380V 50/60Hz	938029
50A	3NO	1NO+1NC	AC 380V 60Hz	NXC-50/N 380V 60Hz	938031
50A	3NO	1NO+1NC	AC 415V 50/60Hz	NXC-50/N 415V 50/60Hz	938033
50A	3NO	1NO+1NC	AC 415V 60Hz	NXC-50/N 415V 60Hz	938035
50A	3NO	1NO+1NC	AC 230V 50Hz	NXC-50/N 230V 50Hz	956170
50A	3NO	1NO+1NC	AC 230V 50/60Hz	NXC-50/N 230V 50/60Hz	956171
50A	3NO	1NO+1NC	AC 230V 60Hz	NXC-50/N 230V 60Hz	956172
50A	3NO	1NO+1NC	AC 240V 50Hz	NXC-50/N 240V 50Hz	956188
50A	3NO	1NO+1NC	AC 240V 50/60Hz	NXC-50/N 240V 50/60Hz	956189
50A	3NO	1NO+1NC	AC 240V 60Hz	NXC-50/N 240V 60Hz	956190
50A	3NO	1NO+1NC	AC 400V 50Hz	NXC-50/N 400V 50Hz	956224
50A	3NO	1NO+1NC	AC 400V 50/60Hz	NXC-50/N 400V 50/60Hz	956225
50A	3NO	1NO+1NC	AC 400V 60Hz	NXC-50/N 400V 60Hz	956226
50A	3NO	1NO+1NC	AC 440V 50Hz	NXC-50/N 440V 50Hz	956242
50A	3NO	1NO+1NC	AC 440V 50/60Hz	NXC-50/N 440V 50/60Hz	956243
50A	3NO	1NO+1NC	AC 440V 60Hz	NXC-50/N 440V 60Hz	956244
50A	2NO+2NC	-	AC 24V 50/60Hz	NXC-50/22 24V 50/60Hz	300162
50A	2NO+2NC	-	AC 110V 50/60Hz	NXC-50/22 110V 50/60Hz	300165
50A	2NO+2NC	-	AC 127V 50/60Hz	NXC-50/22 127V 50/60Hz	300166
50A	2NO+2NC	-	AC 220V 50/60Hz	NXC-50/22 220V 50/60Hz	300167
50A	2NO+2NC	-	AC 380V 50/60Hz	NXC-50/22 380V 50/60Hz	300168
50A	2NO+2NC	-	AC 415V 50/60Hz	NXC-50/22 415V 50/60Hz	300169
50A	2NO+2NC	-	AC 24V 60Hz	NXC-50/22 24V 60Hz	300170
50A	2NO+2NC	-	AC 110V 60Hz	NXC-50/22 110V 60Hz	300173
50A	2NO+2NC	-	AC 127V 60Hz	NXC-50/22 127V 60Hz	300174
50A	2NO+2NC	-	AC 220V 60Hz	NXC-50/22 220V 60Hz	300175
50A	2NO+2NC	-	AC 380V 60Hz	NXC-50/22 380V 60Hz	300176
50A	2NO+2NC	-	AC 415V 60Hz	NXC-50/22 415V 60Hz	300177
50A	4NO	-	AC 24V 50/60Hz	NXC-50/4 24V 50/60Hz	299977
50A	4NO	-	AC 110V 50/60Hz	NXC-50/4 110V 50/60Hz	299980
50A	4NO	-	AC 127V 50/60Hz	NXC-50/4 127V 50/60Hz	299981
50A	4NO	-	AC 220V 50/60Hz	NXC-50/4 220V 50/60Hz	299982
50A	4NO	-	AC 380V 50/60Hz	NXC-50/4 380V 50/60Hz	299983
50A	4NO	-	AC 415V 50/60Hz	NXC-50/4 415V 50/60Hz	299984
50A	4NO	-	AC 24V 60Hz	NXC-50/4 24V 60Hz	299985
50A	4NO	-	AC 110V 60Hz	NXC-50/4 110V 60Hz	299988
50A	4NO	-	AC 127V 60Hz	NXC-50/4 127V 60Hz	299989
50A	4NO	-	AC 220V 60Hz	NXC-50/4 220V 60Hz	299990
50A	4NO	-	AC 380V 60Hz	NXC-50/4 380V 60Hz	299991
50A	4NO	-	AC 415V 60Hz	NXC-50/4 415V 60Hz	299992

AC-3 Current	Main Contacts	Auxiliary Contacts	Coil	Model Description	Code
65A	3NO	1NO+1NC	AC 380V 50Hz	NXC-65 380V 50Hz	836795
65A	3NO	1NO+1NC	AC 220V 50Hz	NXC-65 220V 50Hz	836796
65A	3NO	1NO+1NC	AC 110V 50Hz	NXC-65 110V 50Hz	836797
65A	3NO	1NO+1NC	AC 24V 50Hz	NXC-65 24V 50Hz	836798
65A	3NO	1NO+1NC	AC 127V 50Hz	NXC-65 127V 50Hz	836801
65A	3NO	1NO+1NC	AC 415V 50Hz	NXC-65 415V 50Hz	836802
65A	3NO	1NO+1NC	AC 110V 50/60Hz	NXC-65 110V 50/60Hz	938041
65A	3NO	1NO+1NC	AC 110V 60Hz	NXC-65 110V 60Hz	938043
65A	3NO	1NO+1NC	AC 127V 50/60Hz	NXC-65 127V 50/60Hz	938045
65A	3NO	1NO+1NC	AC 127V 60Hz	NXC-65 127V 60Hz	938047
65A	3NO	1NO+1NC	AC 220V 50/60Hz	NXC-65 220V 50/60Hz	938049
65A	3NO	1NO+1NC	AC 220V 60Hz	NXC-65 220V 60Hz	938051
65A	3NO	1NO+1NC	AC 24V 50/60Hz	NXC-65 24V 50/60Hz	938053
65A	3NO	1NO+1NC	AC 24V 60Hz	NXC-65 24V 60Hz	938055
65A	3NO	1NO+1NC	AC 380V 50/60Hz	NXC-65 380V 50/60Hz	938061
65A	3NO	1NO+1NC	AC 380V 60Hz	NXC-65 380V 60Hz	938063
65A	3NO	1NO+1NC	AC 415V 50/60Hz	NXC-65 415V 50/60Hz	938065
65A	3NO	1NO+1NC	AC 415V 60Hz	NXC-65 415V 60Hz	938067
65A	3NO	1NO+1NC	AC 230V 50/60Hz	NXC-65 230V 50/60Hz	938246
65A	3NO	1NO+1NC	AC 230V 50Hz	NXC-65 230V 50Hz	956051
65A	3NO	1NO+1NC	AC 230V 60Hz	NXC-65 230V 60Hz	956052
65A	3NO	1NO+1NC	AC 240V 50Hz	NXC-65 240V 50Hz	956068
65A	3NO	1NO+1NC	AC 240V 50/60Hz	NXC-65 240V 50/60Hz	956069
65A	3NO	1NO+1NC	AC 240V 60Hz	NXC-65 240V 60Hz	956070
65A	3NO	1NO+1NC	AC 400V 50Hz	NXC-65 400V 50Hz	956104
65A	3NO	1NO+1NC	AC 400V 50/60Hz	NXC-65 400V 50/60Hz	956105
65A	3NO	1NO+1NC	AC 400V 60Hz	NXC-65 400V 60Hz	956106
65A	3NO	1NO+1NC	AC 440V 50Hz	NXC-65 440V 50Hz	956122
65A	3NO	1NO+1NC	AC 440V 50/60Hz	NXC-65 440V 50/60Hz	956123
65A	3NO	1NO+1NC	AC 440V 60Hz	NXC-65 440V 60Hz	956124
65A	3NO	1NO+1NC	AC 380V 50Hz	NXC-65/N 380V 50Hz	836771
65A	3NO	1NO+1NC	AC 220V 50Hz	NXC-65/N 220V 50Hz	836772
65A	3NO	1NO+1NC	AC 110V 50Hz	NXC-65/N 110V 50Hz	836773
65A	3NO	1NO+1NC	AC 24V 50Hz	NXC-65/N 24V 50Hz	836774
65A	3NO	1NO+1NC	AC 127V 50Hz	NXC-65/N 127V 50Hz	836777
65A	3NO	1NO+1NC	AC 415V 50Hz	NXC-65/N 415V 50Hz	836778
65A	3NO	1NO+1NC	AC 110V 50/60Hz	NXC-65/N 110V 50/60Hz	938073
65A	3NO	1NO+1NC	AC 110V 60Hz	NXC-65/N 110V 60Hz	938075
65A	3NO	1NO+1NC	AC 127V 50/60Hz	NXC-65/N 127V 50/60Hz	938077
65A	3NO	1NO+1NC	AC 127V 60Hz	NXC-65/N 127V 60Hz	938079
65A	3NO	1NO+1NC	AC 220V 50/60Hz	NXC-65/N 220V 50/60Hz	938081
65A	3NO	1NO+1NC	AC 220V 60Hz	NXC-65/N 220V 60Hz	938083

AC-3 Current	Main Contacts	Auxiliary Contacts	Coil	Model Description	Code
65A	3NO	1NO+1NC	AC 24V 50/60Hz	NXC-65/N 24V 50/60Hz	938085
65A	3NO	1NO+1NC	AC 24V 60Hz	NXC-65/N 24V 60Hz	938087
65A	3NO	1NO+1NC	AC 380V 50/60Hz	NXC-65/N 380V 50/60Hz	938093
65A	3NO	1NO+1NC	AC 380V 60Hz	NXC-65/N 380V 60Hz	938095
65A	3NO	1NO+1NC	AC 415V 50/60Hz	NXC-65/N 415V 50/60Hz	938097
65A	3NO	1NO+1NC	AC 415V 60Hz	NXC-65/N 415V 60Hz	938099
65A	3NO	1NO+1NC	AC 230V 50Hz	NXC-65/N 230V 50Hz	956176
65A	3NO	1NO+1NC	AC 230V 50/60Hz	NXC-65/N 230V 50/60Hz	956177
65A	3NO	1NO+1NC	AC 230V 60Hz	NXC-65/N 230V 60Hz	956178
65A	3NO	1NO+1NC	AC 240V 50Hz	NXC-65/N 240V 50Hz	956194
65A	3NO	1NO+1NC	AC 240V 50/60Hz	NXC-65/N 240V 50/60Hz	956195
65A	3NO	1NO+1NC	AC 240V 60Hz	NXC-65/N 240V 60Hz	956196
65A	3NO	1NO+1NC	AC 400V 50Hz	NXC-65/N 400V 50Hz	956230
65A	3NO	1NO+1NC	AC 400V 50/60Hz	NXC-65/N 400V 50/60Hz	956231
65A	3NO	1NO+1NC	AC 400V 60Hz	NXC-65/N 400V 60Hz	956232
65A	3NO	1NO+1NC	AC 440V 50Hz	NXC-65/N 440V 50Hz	956248
65A	3NO	1NO+1NC	AC 440V 50/60Hz	NXC-65/N 440V 50/60Hz	956249
65A	3NO	1NO+1NC	AC 440V 60Hz	NXC-65/N 440V 60Hz	956250
65A	2NO+2NC	-	AC 24V 50/60Hz	NXC-65/22 24V 50/60Hz	300178
65A	2NO+2NC	-	AC 110V 50/60Hz	NXC-65/22 110V 50/60Hz	300181
65A	2NO+2NC	-	AC 127V 50/60Hz	NXC-65/22 127V 50/60Hz	300182
65A	2NO+2NC	-	AC 220V 50/60Hz	NXC-65/22 220V 50/60Hz	300183
65A	2NO+2NC	-	AC 380V 50/60Hz	NXC-65/22 380V 50/60Hz	300184
65A	2NO+2NC	-	AC 415V 50/60Hz	NXC-65/22 415V 50/60Hz	300185
65A	2NO+2NC	-	AC 24V 60Hz	NXC-65/22 24V 60Hz	300186
65A	2NO+2NC	-	AC 110V 60Hz	NXC-65/22 110V 60Hz	300189
65A	2NO+2NC	-	AC 127V 60Hz	NXC-65/22 127V 60Hz	300190
65A	2NO+2NC	-	AC 220V 60Hz	NXC-65/22 220V 60Hz	300191
65A	2NO+2NC	-	AC 380V 60Hz	NXC-65/22 380V 60Hz	300192
65A	2NO+2NC	-	AC 415V 60Hz	NXC-65/22 415V 60Hz	300193
65A	4NO	-	AC 24V 50/60Hz	NXC-65/4 24V 50/60Hz	299993
65A	4NO	-	AC 110V 50/60Hz	NXC-65/4 110V 50/60Hz	299996
65A	4NO	-	AC 127V 50/60Hz	NXC-65/4 127V 50/60Hz	299997
65A	4NO	-	AC 220V 50/60Hz	NXC-65/4 220V 50/60Hz	299998
65A	4NO	-	AC 380V 50/60Hz	NXC-65/4 380V 50/60Hz	299999
65A	4NO	-	AC 415V 50/60Hz	NXC-65/4 415V 50/60Hz	300137
65A	4NO	-	AC 24V 60Hz	NXC-65/4 24V 60Hz	300138
65A	4NO	-	AC 110V 60Hz	NXC-65/4 110V 60Hz	300141
65A	4NO	-	AC 127V 60Hz	NXC-65/4 127V 60Hz	300142
65A	4NO	-	AC 220V 60Hz	NXC-65/4 220V 60Hz	300143
65A	4NO	-	AC 380V 60Hz	NXC-65/4 380V 60Hz	300144
65A	4NO	-	AC 415V 60Hz	NXC-65/4 415V 60Hz	300145

AC-3 Current	Main Contacts	Auxiliary Contacts	Coil	Model Description	Code
75A	3NO	1NO+1NC	AC 24V 50Hz	NXC-75 24V 50Hz	836803
75A	3NO	1NO+1NC	AC 110V 50Hz	NXC-75 110V 50Hz	836806
75A	3NO	1NO+1NC	AC 127V 50Hz	NXC-75 127V 50Hz	836807
75A	3NO	1NO+1NC	AC 220V 50Hz	NXC-75 220V 50Hz	836808
75A	3NO	1NO+1NC	AC 380V 50Hz	NXC-75 380V 50Hz	836809
75A	3NO	1NO+1NC	AC 415V 50Hz	NXC-75 415V 50Hz	836810
75A	3NO	1NO+1NC	AC 110V 50/60Hz	NXC-75 110V 50/60Hz	938105
75A	3NO	1NO+1NC	AC 110V 60Hz	NXC-75 110V 60Hz	938107
75A	3NO	1NO+1NC	AC 127V 50/60Hz	NXC-75 127V 50/60Hz	938109
75A	3NO	1NO+1NC	AC 127V 60Hz	NXC-75 127V 60Hz	938111
75A	3NO	1NO+1NC	AC 220V 50/60Hz	NXC-75 220V 50/60Hz	938113
75A	3NO	1NO+1NC	AC 220V 60Hz	NXC-75 220V 60Hz	938115
75A	3NO	1NO+1NC	AC 24V 50/60Hz	NXC-75 24V 50/60Hz	938117
75A	3NO	1NO+1NC	AC 24V 60Hz	NXC-75 24V 60Hz	938119
75A	3NO	1NO+1NC	AC 380V 50/60Hz	NXC-75 380V 50/60Hz	938125
75A	3NO	1NO+1NC	AC 380V 60Hz	NXC-75 380V 60Hz	938127
75A	3NO	1NO+1NC	AC 415V 50/60Hz	NXC-75 415V 50/60Hz	938129
75A	3NO	1NO+1NC	AC 415V 60Hz	NXC-75 415V 60Hz	938131
75A	3NO	1NO+1NC	AC 230V 50Hz	NXC-75 230V 50Hz	956290
75A	3NO	1NO+1NC	AC 230V 50/60Hz	NXC-75 230V 50/60Hz	956291
75A	3NO	1NO+1NC	AC 230V 60Hz	NXC-75 230V 60Hz	956292
75A	3NO	1NO+1NC	AC 240V 50Hz	NXC-75 240V 50Hz	956307
75A	3NO	1NO+1NC	AC 240V 50/60Hz	NXC-75 240V 50/60Hz	956308
75A	3NO	1NO+1NC	AC 240V 60Hz	NXC-75 240V 60Hz	956309
75A	3NO	1NO+1NC	AC 400V 50Hz	NXC-75 400V 50Hz	956343
75A	3NO	1NO+1NC	AC 400V 50/60Hz	NXC-75 400V 50/60Hz	956344
75A	3NO	1NO+1NC	AC 400V 60Hz	NXC-75 400V 60Hz	956345
75A	3NO	1NO+1NC	AC 440V 50Hz	NXC-75 440V 50Hz	956361
75A	3NO	1NO+1NC	AC 440V 50/60Hz	NXC-75 440V 50/60Hz	956362
75A	3NO	1NO+1NC	AC 440V 60Hz	NXC-75 440V 60Hz	956363

AC-3 Current	Main Contacts	Auxiliary Contacts	Coil	Model Description	Code
75A	3NO	1NO+1NC	AC 24V 50Hz	NXC-75/N 24V 50Hz	836827
75A	3NO	1NO+1NC	AC 110V 50Hz	NXC-75/N 110V 50Hz	836830
75A	3NO	1NO+1NC	AC 127V 50Hz	NXC-75/N 127V 50Hz	836831
75A	3NO	1NO+1NC	AC 220V 50Hz	NXC-75/N 220V 50Hz	836832
75A	3NO	1NO+1NC	AC 380V 50Hz	NXC-75/N 380V 50Hz	836833
75A	3NO	1NO+1NC	AC 415V 50Hz	NXC-75/N 415V 50Hz	836834
75A	3NO	1NO+1NC	AC 110V 50/60Hz	NXC-75/N 110V 50/60Hz	938137
75A	3NO	1NO+1NC	AC 110V 60Hz	NXC-75/N 110V 60Hz	938139
75A	3NO	1NO+1NC	AC 127V 50/60Hz	NXC-75/N 127V 50/60Hz	938141
75A	3NO	1NO+1NC	AC 127V 60Hz	NXC-75/N 127V 60Hz	938143
75A	3NO	1NO+1NC	AC 220V 50/60Hz	NXC-75/N 220V 50/60Hz	938145
75A	3NO	1NO+1NC	AC 220V 60Hz	NXC-75/N 220V 60Hz	938147
75A	3NO	1NO+1NC	AC 24V 50/60Hz	NXC-75/N 24V 50/60Hz	938149
75A	3NO	1NO+1NC	AC 24V 60Hz	NXC-75/N 24V 60Hz	938151
75A	3NO	1NO+1NC	AC 380V 50/60Hz	NXC-75/N 380V 50/60Hz	938157
75A	3NO	1NO+1NC	AC 380V 60Hz	NXC-75/N 380V 60Hz	938159
75A	3NO	1NO+1NC	AC 415V 50/60Hz	NXC-75/N 415V 50/60Hz	938161
75A	3NO	1NO+1NC	AC 415V 60Hz	NXC-75/N 415V 60Hz	938163
75A	3NO	1NO+1NC	AC 230V 50Hz	NXC-75/N 230V 50Hz	956415
75A	3NO	1NO+1NC	AC 230V 50/60Hz	NXC-75/N 230V 50/60Hz	956416
75A	3NO	1NO+1NC	AC 230V 60Hz	NXC-75/N 230V 60Hz	956417
75A	3NO	1NO+1NC	AC 240V 50Hz	NXC-75/N 240V 50Hz	956433
75A	3NO	1NO+1NC	AC 240V 50/60Hz	NXC-75/N 240V 50/60Hz	956434
75A	3NO	1NO+1NC	AC 240V 60Hz	NXC-75/N 240V 60Hz	956435
75A	3NO	1NO+1NC	AC 400V 50Hz	NXC-75/N 400V 50Hz	956469
75A	3NO	1NO+1NC	AC 400V 50/60Hz	NXC-75/N 400V 50/60Hz	956470
75A	3NO	1NO+1NC	AC 400V 60Hz	NXC-75/N 400V 60Hz	956471
75A	3NO	1NO+1NC	AC 440V 50Hz	NXC-75/N 440V 50Hz	956487
75A	3NO	1NO+1NC	AC 440V 50/60Hz	NXC-75/N 440V 50/60Hz	956488
75A	3NO	1NO+1NC	AC 440V 60Hz	NXC-75/N 440V 60Hz	956489

AC-3 Current	Main Contacts	Auxiliary Contacts	Coil	Model Description	Code
80A	2NO+2NC	-	AC 24V 60Hz	NXC-80/22 24V 60Hz	300226
80A	2NO+2NC	-	AC 24V 50/60Hz	NXC-80/22 24V 50/60Hz	300227
80A	2NO+2NC	-	AC 110V 60Hz	NXC-80/22 110V 60Hz	300232
80A	2NO+2NC	-	AC 110V 50/60Hz	NXC-80/22 110V 50/60Hz	300233
80A	2NO+2NC	-	AC 127V 60Hz	NXC-80/22 127V 60Hz	300234
80A	2NO+2NC	-	AC 127V 50/60Hz	NXC-80/22 127V 50/60Hz	300235
80A	2NO+2NC	-	AC 220V 60Hz	NXC-80/22 220V 60Hz	300236
80A	2NO+2NC	-	AC 220V 50/60Hz	NXC-80/22 220V 50/60Hz	300237
80A	2NO+2NC	-	AC 380V 60Hz	NXC-80/22 380V 60Hz	300238
80A	2NO+2NC	-	AC 380V 50/60Hz	NXC-80/22 380V 50/60Hz	300239
80A	2NO+2NC	-	AC 415V 60Hz	NXC-80/22 415V 60Hz	300240
80A	2NO+2NC	-	AC 415V 50/60Hz	NXC-80/22 415V 50/60Hz	300241
80A	4NO	-	AC 24V 60Hz	NXC-80/4 24V 60Hz	300194
80A	4NO	-	AC 24V 50/60Hz	NXC-80/4 24V 50/60Hz	300195
80A	4NO	-	AC 110V 60Hz	NXC-80/4 110V 60Hz	300200
80A	4NO	-	AC 110V 50/60Hz	NXC-80/4 110V 50/60Hz	300201
80A	4NO	-	AC 127V 60Hz	NXC-80/4 127V 60Hz	300202
80A	4NO	-	AC 127V 50/60Hz	NXC-80/4 127V 50/60Hz	300203
80A	4NO	-	AC 220V 60Hz	NXC-80/4 220V 60Hz	300204
80A	4NO	-	AC 220V 50/60Hz	NXC-80/4 220V 50/60Hz	300205
80A	4NO	-	AC 380V 60Hz	NXC-80/4 380V 60Hz	300206
80A	4NO	-	AC 380V 50/60Hz	NXC-80/4 380V 50/60Hz	300207
80A	4NO	-	AC 415V 60Hz	NXC-80/4 415V 60Hz	300208
80A	4NO	-	AC 415V 50/60Hz	NXC-80/4 415V 50/60Hz	300209

AC-3 Current	Main Contacts	Auxiliary Contacts	Coil	Model Description	Code
85A	3NO	1NO+1NC	AC 24V 50Hz	NXC-85 24V 50Hz	836811
85A	3NO	1NO+1NC	AC 110V 50Hz	NXC-85 110V 50Hz	836814
85A	3NO	1NO+1NC	AC 127V 50Hz	NXC-85 127V 50Hz	836815
85A	3NO	1NO+1NC	AC 220V 50Hz	NXC-85 220V 50Hz	836816
85A	3NO	1NO+1NC	AC 380V 50Hz	NXC-85 380V 50Hz	836817
85A	3NO	1NO+1NC	AC 415V 50Hz	NXC-85 415V 50Hz	836818
85A	3NO	1NO+1NC	AC 110V 50/60Hz	NXC-85 110V 50/60Hz	938169
85A	3NO	1NO+1NC	AC 110V 60Hz	NXC-85 110V 60Hz	938171
85A	3NO	1NO+1NC	AC 127V 50/60Hz	NXC-85 127V 50/60Hz	938173
85A	3NO	1NO+1NC	AC 127V 60Hz	NXC-85 127V 60Hz	938175
85A	3NO	1NO+1NC	AC 220V 50/60Hz	NXC-85 220V 50/60Hz	938177
85A	3NO	1NO+1NC	AC 220V 60Hz	NXC-85 220V 60Hz	938179
85A	3NO	1NO+1NC	AC 24V 50/60Hz	NXC-85 24V 50/60Hz	938181
85A	3NO	1NO+1NC	AC 24V 60Hz	NXC-85 24V 60Hz	938183
85A	3NO	1NO+1NC	AC 380V 50/60Hz	NXC-85 380V 50/60Hz	938189
85A	3NO	1NO+1NC	AC 380V 60Hz	NXC-85 380V 60Hz	938191
85A	3NO	1NO+1NC	AC 415V 50/60Hz	NXC-85 415V 50/60Hz	938193
85A	3NO	1NO+1NC	AC 415V 60Hz	NXC-85 415V 60Hz	938195
85A	3NO	1NO+1NC	AC 230V 50Hz	NXC-85 230V 50Hz	956296
85A	3NO	1NO+1NC	AC 230V 50/60Hz	NXC-85 230V 50/60Hz	956297
85A	3NO	1NO+1NC	AC 230V 60Hz	NXC-85 230V 60Hz	956298
85A	3NO	1NO+1NC	AC 240V 50Hz	NXC-85 240V 50Hz	956313
85A	3NO	1NO+1NC	AC 240V 50/60Hz	NXC-85 240V 50/60Hz	956314
85A	3NO	1NO+1NC	AC 240V 60Hz	NXC-85 240V 60Hz	956315
85A	3NO	1NO+1NC	AC 400V 50Hz	NXC-85 400V 50Hz	956349
85A	3NO	1NO+1NC	AC 400V 50/60Hz	NXC-85 400V 50/60Hz	956350
85A	3NO	1NO+1NC	AC 400V 60Hz	NXC-85 400V 60Hz	956351
85A	3NO	1NO+1NC	AC 440V 50Hz	NXC-85 440V 50Hz	956367
85A	3NO	1NO+1NC	AC 440V 50/60Hz	NXC-85 440V 50/60Hz	956368
85A	3NO	1NO+1NC	AC 440V 60Hz	NXC-85 440V 60Hz	956369

AC-3 Current	Main Contacts	Auxiliary Contacts	Coil	Model Description	Code
85A	3NO	1NO+1NC	AC 24V 50Hz	NXC-85/N 24V 50Hz	836835
85A	3NO	1NO+1NC	AC 110V 50Hz	NXC-85/N 110V 50Hz	836838
85A	3NO	1NO+1NC	AC 127V 50Hz	NXC-85/N 127V 50Hz	836839
85A	3NO	1NO+1NC	AC 220V 50Hz	NXC-85/N 220V 50Hz	836840
85A	3NO	1NO+1NC	AC 380V 50Hz	NXC-85/N 380V 50Hz	836841
85A	3NO	1NO+1NC	AC 415V 50Hz	NXC-85/N 415V 50Hz	836842
85A	3NO	1NO+1NC	AC 110V 50/60Hz	NXC-85/N 110V 50/60Hz	938201
85A	3NO	1NO+1NC	AC 110V 60Hz	NXC-85/N 110V 60Hz	938203
85A	3NO	1NO+1NC	AC 127V 50/60Hz	NXC-85/N 127V 50/60Hz	938205
85A	3NO	1NO+1NC	AC 127V 60Hz	NXC-85/N 127V 60Hz	938207
85A	3NO	1NO+1NC	AC 220V 50/60Hz	NXC-85/N 220V 50/60Hz	938209
85A	3NO	1NO+1NC	AC 220V 60Hz	NXC-85/N 220V 60Hz	938211
85A	3NO	1NO+1NC	AC 24V 50/60Hz	NXC-85/N 24V 50/60Hz	938213
85A	3NO	1NO+1NC	AC 24V 60Hz	NXC-85/N 24V 60Hz	938215
85A	3NO	1NO+1NC	AC 380V 50/60Hz	NXC-85/N 380V 50/60Hz	938221
85A	3NO	1NO+1NC	AC 380V 60Hz	NXC-85/N 380V 60Hz	938223
85A	3NO	1NO+1NC	AC 415V 50/60Hz	NXC-85/N 415V 50/60Hz	938225
85A	3NO	1NO+1NC	AC 415V 60Hz	NXC-85/N 415V 60Hz	938227
85A	3NO	1NO+1NC	AC 230V 50Hz	NXC-85/N 230V 50Hz	956421
85A	3NO	1NO+1NC	AC 230V 50/60Hz	NXC-85/N 230V 50/60Hz	956422
85A	3NO	1NO+1NC	AC 230V 60Hz	NXC-85/N 230V 60Hz	956423
85A	3NO	1NO+1NC	AC 240V 50Hz	NXC-85/N 240V 50Hz	956439
85A	3NO	1NO+1NC	AC 240V 50/60Hz	NXC-85/N 240V 50/60Hz	956440
85A	3NO	1NO+1NC	AC 240V 60Hz	NXC-85/N 240V 60Hz	956441
85A	3NO	1NO+1NC	AC 400V 50Hz	NXC-85/N 400V 50Hz	956475
85A	3NO	1NO+1NC	AC 400V 50/60Hz	NXC-85/N 400V 50/60Hz	956476
85A	3NO	1NO+1NC	AC 400V 60Hz	NXC-85/N 400V 60Hz	956477
85A	3NO	1NO+1NC	AC 440V 50Hz	NXC-85/N 440V 50Hz	956493
85A	3NO	1NO+1NC	AC 440V 50/60Hz	NXC-85/N 440V 50/60Hz	956494
85A	3NO	1NO+1NC	AC 440V 60Hz	NXC-85/N 440V 60Hz	956495

AC-3 Current	Main Contacts	Auxiliary Contacts	Coil	Model Description	Code
95A	2NO+2NC	-	AC 24V 60Hz	NXC-95/22 24V 60Hz	300242
95A	2NO+2NC	-	AC 24V 50/60Hz	NXC-95/22 24V 50/60Hz	300243
95A	2NO+2NC	-	AC 110V 60Hz	NXC-95/22 110V 60Hz	300248
95A	2NO+2NC	-	AC 110V 50/60Hz	NXC-95/22 110V 50/60Hz	300249
95A	2NO+2NC	-	AC 127V 60Hz	NXC-95/22 127V 60Hz	300250
95A	2NO+2NC	-	AC 127V 50/60Hz	NXC-95/22 127V 50/60Hz	300251
95A	2NO+2NC	-	AC 220V 60Hz	NXC-95/22 220V 60Hz	300252
95A	2NO+2NC	-	AC 220V 50/60Hz	NXC-95/22 220V 50/60Hz	300253
95A	2NO+2NC	-	AC 380V 60Hz	NXC-95/22 380V 60Hz	300254
95A	2NO+2NC	-	AC 380V 50/60Hz	NXC-95/22 380V 50/60Hz	300255
95A	2NO+2NC	-	AC 415V 60Hz	NXC-95/22 415V 60Hz	300256
95A	2NO+2NC	-	AC 415V 50/60Hz	NXC-95/22 415V 50/60Hz	300257
95A	4NO	-	AC 24V 60Hz	NXC-95/4 24V 60Hz	300210
95A	4NO	-	AC 24V 50/60Hz	NXC-95/4 24V 50/60Hz	300211
95A	4NO	-	AC 110V 60Hz	NXC-95/4 110V 60Hz	300216
95A	4NO	-	AC 110V 50/60Hz	NXC-95/4 110V 50/60Hz	300217
95A	4NO	-	AC 127V 60Hz	NXC-95/4 127V 60Hz	300218
95A	4NO	-	AC 127V 50/60Hz	NXC-95/4 127V 50/60Hz	300219
95A	4NO	-	AC 220V 60Hz	NXC-95/4 220V 60Hz	300220
95A	4NO	-	AC 220V 50/60Hz	NXC-95/4 220V 50/60Hz	300221
95A	4NO	-	AC 380V 60Hz	NXC-95/4 380V 60Hz	300222
95A	4NO	-	AC 380V 50/60Hz	NXC-95/4 380V 50/60Hz	300223
95A	4NO	-	AC 415V 60Hz	NXC-95/4 415V 60Hz	300224
95A	4NO	-	AC 415V 50/60Hz	NXC-95/4 415V 50/60Hz	300225

AC-3 Current	Main Contacts	Auxiliary Contacts	Coil	Model Description	Code
100A	3NO	1NO+1NC	AC 24V 50Hz	NXC-100 24V 50Hz	836819
100A	3NO	1NO+1NC	AC 110V 50Hz	NXC-100 110V 50Hz	836822
100A	3NO	1NO+1NC	AC 127V 50Hz	NXC-100 127V 50Hz	836823
100A	3NO	1NO+1NC	AC 220V 50Hz	NXC-100 220V 50Hz	836824
100A	3NO	1NO+1NC	AC 380V 50Hz	NXC-100 380V 50Hz	836825
100A	3NO	1NO+1NC	AC 415V 50Hz	NXC-100 415V 50Hz	836826
100A	3NO	1NO+1NC	AC 110V 50/60Hz	NXC-100 110V 50/60Hz	925409
100A	3NO	1NO+1NC	AC 110V 60Hz	NXC-100 110V 60Hz	925410
100A	3NO	1NO+1NC	AC 127V 50/60Hz	NXC-100 127V 50/60Hz	925412
100A	3NO	1NO+1NC	AC 127V 60Hz	NXC-100 127V 60Hz	925414
100A	3NO	1NO+1NC	AC 220V 50/60Hz	NXC-100 220V 50/60Hz	925416
100A	3NO	1NO+1NC	AC 220V 60Hz	NXC-100 220V 60Hz	925417
100A	3NO	1NO+1NC	AC 24V 50/60Hz	NXC-100 24V 50/60Hz	925419
100A	3NO	1NO+1NC	AC 24V 60Hz	NXC-100 24V 60Hz	925421
100A	3NO	1NO+1NC	AC 380V 50/60Hz	NXC-100 380V 50/60Hz	925427
100A	3NO	1NO+1NC	AC 380V 60Hz	NXC-100 380V 60Hz	925429
100A	3NO	1NO+1NC	AC 415V 50/60Hz	NXC-100 415V 50/60Hz	925431
100A	3NO	1NO+1NC	AC 415V 60Hz	NXC-100 415V 60Hz	925433
100A	3NO	1NO+1NC	AC 230V 50/60Hz	NXC-100 230V 50/60Hz	938247
100A	3NO	1NO+1NC	AC 230V 50Hz	NXC-100 230V 50Hz	956302
100A	3NO	1NO+1NC	AC 230V 60Hz	NXC-100 230V 60Hz	956303
100A	3NO	1NO+1NC	AC 240V 50Hz	NXC-100 240V 50Hz	956319
100A	3NO	1NO+1NC	AC 240V 50/60Hz	NXC-100 240V 50/60Hz	956320
100A	3NO	1NO+1NC	AC 240V 60Hz	NXC-100 240V 60Hz	956321
100A	3NO	1NO+1NC	AC 400V 50Hz	NXC-100 400V 50Hz	956355
100A	3NO	1NO+1NC	AC 400V 50/60Hz	NXC-100 400V 50/60Hz	956356
100A	3NO	1NO+1NC	AC 400V 60Hz	NXC-100 400V 60Hz	956357
100A	3NO	1NO+1NC	AC 440V 50Hz	NXC-100 440V 50Hz	956373
100A	3NO	1NO+1NC	AC 440V 50/60Hz	NXC-100 440V 50/60Hz	956374
100A	3NO	1NO+1NC	AC 440V 60Hz	NXC-100 440V 60Hz	956375

AC-3 Current	Main Contacts	Auxiliary Contacts	Coil	Model Description	Code
100A	3NO	1NO+1NC	AC 24V 50Hz	NXC-100/N 24V 50Hz	836843
100A	3NO	1NO+1NC	AC 110V 50Hz	NXC-100/N 110V 50Hz	836846
100A	3NO	1NO+1NC	AC 127V 50Hz	NXC-100/N 127V 50Hz	836847
100A	3NO	1NO+1NC	AC 220V 50Hz	NXC-100/N 220V 50Hz	836848
100A	3NO	1NO+1NC	AC 380V 50Hz	NXC-100/N 380V 50Hz	836849
100A	3NO	1NO+1NC	AC 415V 50Hz	NXC-100/N 415V 50Hz	836850
100A	3NO	1NO+1NC	AC 110V 50/60Hz	NXC-100/N 110V 50/60Hz	925439
100A	3NO	1NO+1NC	AC 110V 60Hz	NXC-100/N 110V 60Hz	925441
100A	3NO	1NO+1NC	AC 127V 50/60Hz	NXC-100/N 127V 50/60Hz	925443
100A	3NO	1NO+1NC	AC 127V 60Hz	NXC-100/N 127V 60Hz	925445
100A	3NO	1NO+1NC	AC 220V 50/60Hz	NXC-100/N 220V 50/60Hz	925447
100A	3NO	1NO+1NC	AC 220V 60Hz	NXC-100/N 220V 60Hz	925449
100A	3NO	1NO+1NC	AC 24V 50/60Hz	NXC-100/N 24V 50/60Hz	925451
100A	3NO	1NO+1NC	AC 24V 60Hz	NXC-100/N 24V 60Hz	925453
100A	3NO	1NO+1NC	AC 380V 50/60Hz	NXC-100/N 380V 50/60Hz	925459
100A	3NO	1NO+1NC	AC 380V 60Hz	NXC-100/N 380V 60Hz	925461
100A	3NO	1NO+1NC	AC 415V 50/60Hz	NXC-100/N 415V 50/60Hz	925463
100A	3NO	1NO+1NC	AC 415V 60Hz	NXC-100/N 415V 60Hz	925465
100A	3NO	1NO+1NC	AC 230V 50Hz	NXC-100/N 230V 50Hz	956427
100A	3NO	1NO+1NC	AC 230V 50/60Hz	NXC-100/N 230V 50/60Hz	956428
100A	3NO	1NO+1NC	AC 230V 60Hz	NXC-100/N 230V 60Hz	956429
100A	3NO	1NO+1NC	AC 240V 50Hz	NXC-100/N 240V 50Hz	956445
100A	3NO	1NO+1NC	AC 240V 50/60Hz	NXC-100/N 240V 50/60Hz	956446
100A	3NO	1NO+1NC	AC 240V 60Hz	NXC-100/N 240V 60Hz	956447
100A	3NO	1NO+1NC	AC 400V 50Hz	NXC-100/N 400V 50Hz	956481
100A	3NO	1NO+1NC	AC 400V 50/60Hz	NXC-100/N 400V 50/60Hz	956482
100A	3NO	1NO+1NC	AC 400V 60Hz	NXC-100/N 400V 60Hz	956483
100A	3NO	1NO+1NC	AC 440V 50Hz	NXC-100/N 440V 50Hz	956499
100A	3NO	1NO+1NC	AC 440V 50/60Hz	NXC-100/N 440V 50/60Hz	956500
100A	3NO	1NO+1NC	AC 440V 60Hz	NXC-100/N 440V 60Hz	956501

AC-3 Current	Main Contacts	Auxiliary Contacts	Coil	Model Description	Code
120A	3NO	2NO+2NC	AC 415V 50Hz	NXC-120 415V 50Hz	154392
120A	3NO	2NO+2NC	AC 415V 50/60Hz	NXC-120 415V 50/60Hz	154396
120A	3NO	2NO+2NC	AC 240V 60Hz	NXC-120 240V 60Hz	257170
120A	3NO	2NO+2NC	AC 400V 50Hz	NXC-120 400V 50Hz	257171
120A	3NO	2NO+2NC	AC 400V 60Hz	NXC-120 400V 60Hz	257172
120A	3NO	2NO+2NC	AC 415V 60Hz	NXC-120 415V 60Hz	257173
120A	3NO	2NO+2NC	AC 230V 60Hz	NXC-120 230V 60Hz	262296
120A	3NO	2NO+2NC	AC 230V 50Hz	NXC-120 230V 50Hz	262297
120A	3NO	2NO+2NC	AC 230V 50/60Hz	NXC-120 230V 50/60Hz	262298
120A	3NO	2NO+2NC	AC 110V 50Hz	NXC-120 110V 50Hz	836509
120A	3NO	2NO+2NC	AC 127V 50Hz	NXC-120 127V 50Hz	836510
120A	3NO	2NO+2NC	AC 220V 50Hz	NXC-120 220V 50Hz	836511
120A	3NO	2NO+2NC	AC 380V 50Hz	NXC-120 380V 50Hz	836512
120A	3NO	2NO+2NC	AC 110V 60Hz	NXC-120 110V 60Hz	925216
120A	3NO	2NO+2NC	AC 127V 60Hz	NXC-120 127V 60Hz	925217
120A	3NO	2NO+2NC	AC 220V 60Hz	NXC-120 220V 60Hz	925218
120A	3NO	2NO+2NC	AC 380V 60Hz	NXC-120 380V 60Hz	925219
120A	3NO	2NO+2NC	AC 110V 50/60Hz	NXC-120 110V 50/60Hz	925248
120A	3NO	2NO+2NC	AC 127V 50/60Hz	NXC-120 127V 50/60Hz	925249
120A	3NO	2NO+2NC	AC 220V 50/60Hz	NXC-120 220V 50/60Hz	925250
120A	3NO	2NO+2NC	AC 380V 50/60Hz	NXC-120 380V 50/60Hz	925251
120A	3NO	2NO+2NC	AC 240V 50/60Hz	NXC-120 240V 50/60Hz	956543
120A	3NO	2NO+2NC	AC 240V 50Hz	NXC-120 240V 50Hz	956546
120A	3NO	2NO+2NC	AC 400V 50/60Hz	NXC-120 400V 50/60Hz	956550
120A	3NO	2NO+2NC	AC 110V 50Hz	NXC-120/N 110V 50Hz	836525
120A	3NO	2NO+2NC	AC 127V 50Hz	NXC-120/N 127V 50Hz	836526
120A	3NO	2NO+2NC	AC 220V 50Hz	NXC-120/N 220V 50Hz	836527
120A	3NO	2NO+2NC	AC 380V 50Hz	NXC-120/N 380V 50Hz	836528
120A	3NO	2NO+2NC	AC 110V 60Hz	NXC-120/N 110V 60Hz	925232
120A	3NO	2NO+2NC	AC 127V 60Hz	NXC-120/N 127V 60Hz	925233
120A	3NO	2NO+2NC	AC 220V 60Hz	NXC-120/N 220V 60Hz	925234
120A	3NO	2NO+2NC	AC 380V 60Hz	NXC-120/N 380V 60Hz	925235
120A	3NO	2NO+2NC	AC 110V 50/60Hz	NXC-120/N 110V 50/60Hz	925264
120A	3NO	2NO+2NC	AC 127V 50/60Hz	NXC-120/N 127V 50/60Hz	925265
120A	3NO	2NO+2NC	AC 220V 50/60Hz	NXC-120/N 220V 50/60Hz	925266
120A	3NO	2NO+2NC	AC 380V 50/60Hz	NXC-120/N 380V 50/60Hz	925267

AC-3 Current	Main Contacts	Auxiliary Contacts	Coil	Model Description	Code
160A	3NO	2NO+2NC	AC 415V 50Hz	NXC-160 415V 50Hz	154393
160A	3NO	2NO+2NC	AC 415V 50/60Hz	NXC-160 415V 50/60Hz	154397
160A	3NO	2NO+2NC	AC 230V 50Hz	NXC-160 230V 50Hz	257174
160A	3NO	2NO+2NC	AC 230V 60Hz	NXC-160 230V 60Hz	257175
160A	3NO	2NO+2NC	AC 240V 60Hz	NXC-160 240V 60Hz	257176
160A	3NO	2NO+2NC	AC 400V 50Hz	NXC-160 400V 50Hz	257177
160A	3NO	2NO+2NC	AC 400V 60Hz	NXC-160 400V 60Hz	257178
160A	3NO	2NO+2NC	AC 415V 60Hz	NXC-160 415V 60Hz	257179
160A	3NO	2NO+2NC	AC 110V 50Hz	NXC-160 110V 50Hz	836513
160A	3NO	2NO+2NC	AC 127V 50Hz	NXC-160 127V 50Hz	836514
160A	3NO	2NO+2NC	AC 220V 50Hz	NXC-160 220V 50Hz	836515
160A	3NO	2NO+2NC	AC 380V 50Hz	NXC-160 380V 50Hz	836516
160A	3NO	2NO+2NC	AC 110V 60Hz	NXC-160 110V 60Hz	925220
160A	3NO	2NO+2NC	AC 127V 60Hz	NXC-160 127V 60Hz	925221
160A	3NO	2NO+2NC	AC 220V 60Hz	NXC-160 220V 60Hz	925222
160A	3NO	2NO+2NC	AC 380V 60Hz	NXC-160 380V 60Hz	925223
160A	3NO	2NO+2NC	AC 110V 50/60Hz	NXC-160 110V 50/60Hz	925252
160A	3NO	2NO+2NC	AC 127V 50/60Hz	NXC-160 127V 50/60Hz	925253
160A	3NO	2NO+2NC	AC 220V 50/60Hz	NXC-160 220V 50/60Hz	925254
160A	3NO	2NO+2NC	AC 380V 50/60Hz	NXC-160 380V 50/60Hz	925255
160A	3NO	2NO+2NC	AC 230V 50/60Hz	NXC-160 230V 50/60Hz	956520
160A	3NO	2NO+2NC	AC 240V 50/60Hz	NXC-160 240V 50/60Hz	956544
160A	3NO	2NO+2NC	AC 240V 50Hz	NXC-160 240V 50Hz	956547
160A	3NO	2NO+2NC	AC 400V 50/60Hz	NXC-160 400V 50/60Hz	956551
160A	3NO	2NO+2NC	AC 110V 50Hz	NXC-160/N 110V 50Hz	836529
160A	3NO	2NO+2NC	AC 127V 50Hz	NXC-160/N 127V 50Hz	836530
160A	3NO	2NO+2NC	AC 220V 50Hz	NXC-160/N 220V 50Hz	836531
160A	3NO	2NO+2NC	AC 380V 50Hz	NXC-160/N 380V 50Hz	836532
160A	3NO	2NO+2NC	AC 110V 60Hz	NXC-160/N 110V 60Hz	925236
160A	3NO	2NO+2NC	AC 127V 60Hz	NXC-160/N 127V 60Hz	925237
160A	3NO	2NO+2NC	AC 220V 60Hz	NXC-160/N 220V 60Hz	925238
160A	3NO	2NO+2NC	AC 380V 60Hz	NXC-160/N 380V 60Hz	925239
160A	3NO	2NO+2NC	AC 110V 50/60Hz	NXC-160/N 110V 50/60Hz	925268
160A	3NO	2NO+2NC	AC 127V 50/60Hz	NXC-160/N 127V 50/60Hz	925269
160A	3NO	2NO+2NC	AC 220V 50/60Hz	NXC-160/N 220V 50/60Hz	925270
160A	3NO	2NO+2NC	AC 380V 50/60Hz	NXC-160/N 380V 50/60Hz	925271

AC-3 Current	Main Contacts	Auxiliary Contacts	Coil	Model Description	Code
185A	3NO	2NO+2NC	AC 230V 50/60Hz	NXC-185 230V 50/60Hz	146689
185A	3NO	2NO+2NC	AC 415V 50Hz	NXC-185 415V 50Hz	154394
185A	3NO	2NO+2NC	AC 415V 50/60Hz	NXC-185 415V 50/60Hz	154398
185A	3NO	2NO+2NC	AC 230V 50Hz	NXC-185 230V 50Hz	257180
185A	3NO	2NO+2NC	AC 230V 60Hz	NXC-185 230V 60Hz	257181
185A	3NO	2NO+2NC	AC 240V 60Hz	NXC-185 240V 60Hz	257182
185A	3NO	2NO+2NC	AC 400V 50Hz	NXC-185 400V 50Hz	257183
185A	3NO	2NO+2NC	AC 400V 60Hz	NXC-185 400V 60Hz	257184
185A	3NO	2NO+2NC	AC 415V 60Hz	NXC-185 415V 60Hz	257185
185A	3NO	2NO+2NC	AC 110V 50Hz	NXC-185 110V 50Hz	836517
185A	3NO	2NO+2NC	AC 127V 50Hz	NXC-185 127V 50Hz	836518
185A	3NO	2NO+2NC	AC 220V 50Hz	NXC-185 220V 50Hz	836519
185A	3NO	2NO+2NC	AC 380V 50Hz	NXC-185 380V 50Hz	836520
185A	3NO	2NO+2NC	AC 110V 60Hz	NXC-185 110V 60Hz	925224
185A	3NO	2NO+2NC	AC 127V 60Hz	NXC-185 127V 60Hz	925225
185A	3NO	2NO+2NC	AC 220V 60Hz	NXC-185 220V 60Hz	925226
185A	3NO	2NO+2NC	AC 380V 60Hz	NXC-185 380V 60Hz	925227
185A	3NO	2NO+2NC	AC 110V 50/60Hz	NXC-185 110V 50/60Hz	925256
185A	3NO	2NO+2NC	AC 127V 50/60Hz	NXC-185 127V 50/60Hz	925257
185A	3NO	2NO+2NC	AC 220V 50/60Hz	NXC-185 220V 50/60Hz	925258
185A	3NO	2NO+2NC	AC 380V 50/60Hz	NXC-185 380V 50/60Hz	925259
185A	3NO	2NO+2NC	AC 240V 50/60Hz	NXC-185 240V 50/60Hz	956545
185A	3NO	2NO+2NC	AC 240V 50Hz	NXC-185 240V 50Hz	956548
185A	3NO	2NO+2NC	AC 400V 50/60Hz	NXC-185 400V 50/60Hz	956552
185A	3NO	2NO+2NC	AC 110V 50Hz	NXC-185/N 110V 50Hz	836533
185A	3NO	2NO+2NC	AC 127V 50Hz	NXC-185/N 127V 50Hz	836534
185A	3NO	2NO+2NC	AC 220V 50Hz	NXC-185/N 220V 50Hz	836535
185A	3NO	2NO+2NC	AC 380V 50Hz	NXC-185/N 380V 50Hz	836536
185A	3NO	2NO+2NC	AC 110V 60Hz	NXC-185/N 110V 60Hz	925240
185A	3NO	2NO+2NC	AC 127V 60Hz	NXC-185/N 127V 60Hz	925241
185A	3NO	2NO+2NC	AC 220V 60Hz	NXC-185/N 220V 60Hz	925242
185A	3NO	2NO+2NC	AC 380V 60Hz	NXC-185/N 380V 60Hz	925243
185A	3NO	2NO+2NC	AC 110V 50/60Hz	NXC-185/N 110V 50/60Hz	925272
185A	3NO	2NO+2NC	AC 127V 50/60Hz	NXC-185/N 127V 50/60Hz	925273
185A	3NO	2NO+2NC	AC 220V 50/60Hz	NXC-185/N 220V 50/60Hz	925274
185A	3NO	2NO+2NC	AC 380V 50/60Hz	NXC-185/N 380V 50/60Hz	925275

AC-3 Current	Main Contacts	Auxiliary Contacts	Coil	Model Description	Code
225A	3NO	2NO+2NC	AC 415V 50Hz	NXC-225 415V 50Hz	154395
225A	3NO	2NO+2NC	AC 415V 50/60Hz	NXC-225 415V 50/60Hz	154399
225A	3NO	2NO+2NC	AC 230V 50Hz	NXC-225 230V 50Hz	257186
225A	3NO	2NO+2NC	AC 230V 60Hz	NXC-225 230V 60Hz	257187
225A	3NO	2NO+2NC	AC 240V 60Hz	NXC-225 240V 60Hz	257188
225A	3NO	2NO+2NC	AC 400V 50Hz	NXC-225 400V 50Hz	257189
225A	3NO	2NO+2NC	AC 400V 60Hz	NXC-225 400V 60Hz	257190
225A	3NO	2NO+2NC	AC 415V 60Hz	NXC-225 415V 60Hz	257191
225A	3NO	2NO+2NC	AC 110V 50Hz	NXC-225 110V 50Hz	836521
225A	3NO	2NO+2NC	AC 127V 50Hz	NXC-225 127V 50Hz	836522
225A	3NO	2NO+2NC	AC 220V 50Hz	NXC-225 220V 50Hz	836523
225A	3NO	2NO+2NC	AC 380V 50Hz	NXC-225 380V 50Hz	836524
225A	3NO	2NO+2NC	AC 110V 60Hz	NXC-225 110V 60Hz	925228
225A	3NO	2NO+2NC	AC 127V 60Hz	NXC-225 127V 60Hz	925229
225A	3NO	2NO+2NC	AC 220V 60Hz	NXC-225 220V 60Hz	925230
225A	3NO	2NO+2NC	AC 380V 60Hz	NXC-225 380V 60Hz	925231
225A	3NO	2NO+2NC	AC 110V 50/60Hz	NXC-225 110V 50/60Hz	925260
225A	3NO	2NO+2NC	AC 127V 50/60Hz	NXC-225 127V 50/60Hz	925261
225A	3NO	2NO+2NC	AC 220V 50/60Hz	NXC-225 220V 50/60Hz	925262
225A	3NO	2NO+2NC	AC 380V 50/60Hz	NXC-225 380V 50/60Hz	925263
225A	3NO	2NO+2NC	AC 230V 50/60Hz	NXC-225 230V 50/60Hz	938248
225A	3NO	2NO+2NC	AC 240V 50/60Hz	NXC-225 240V 50/60Hz	956530
225A	3NO	2NO+2NC	AC 240V 50Hz	NXC-225 240V 50Hz	956549
225A	3NO	2NO+2NC	AC 400V 50/60Hz	NXC-225 400V 50/60Hz	956553
225A	3NO	2NO+2NC	AC 110V 50Hz	NXC-225/N 110V 50Hz	836537
225A	3NO	2NO+2NC	AC 127V 50Hz	NXC-225/N 127V 50Hz	836538
225A	3NO	2NO+2NC	AC 220V 50Hz	NXC-225/N 220V 50Hz	836539
225A	3NO	2NO+2NC	AC 380V 50Hz	NXC-225/N 380V 50Hz	836540
225A	3NO	2NO+2NC	AC 110V 60Hz	NXC-225/N 110V 60Hz	925244
225A	3NO	2NO+2NC	AC 127V 60Hz	NXC-225/N 127V 60Hz	925245
225A	3NO	2NO+2NC	AC 220V 60Hz	NXC-225/N 220V 60Hz	925246
225A	3NO	2NO+2NC	AC 380V 60Hz	NXC-225/N 380V 60Hz	925247
225A	3NO	2NO+2NC	AC 110V 50/60Hz	NXC-225/N 110V 50/60Hz	925276
225A	3NO	2NO+2NC	AC 127V 50/60Hz	NXC-225/N 127V 50/60Hz	925277
225A	3NO	2NO+2NC	AC 220V 50/60Hz	NXC-225/N 220V 50/60Hz	925278
225A	3NO	2NO+2NC	AC 380V 50/60Hz	NXC-225/N 380V 50/60Hz	925279

AC-3 Current	Main Contacts	Auxiliary Contacts	Coil	Model Description	Code
265A	3NO	2NO+2NC	AC/DC 380V-415V	NXC-265 AC/DC 380V-415V	836541
265A	3NO	2NO+2NC	AC/DC 220V-240V	NXC-265 AC/DC 220V-240V	836542
265A	3NO	2NO+2NC	AC/DC 110V-127V	NXC-265 AC/DC 110V-127V	836543
265A	3NO	2NO+2NC	AC/DC 380V-415V	NXC-265/N AC/DC 380V-415V	836550
265A	3NO	2NO+2NC	AC/DC 220V-240V	NXC-265/N AC/DC 220V-240V	836551
265A	3NO	2NO+2NC	AC/DC 110V-127V	NXC-265/N AC/DC 110V-127V	836552
330A	3NO	2NO+2NC	AC/DC 380V-415V	NXC-330 AC/DC 380V-415V	836544
330A	3NO	2NO+2NC	AC/DC 220V-240V	NXC-330 AC/DC 220V-240V	836545
330A	3NO	2NO+2NC	AC/DC 110V-127V	NXC-330 AC/DC 110V-127V	836546
330A	3NO	2NO+2NC	AC/DC 380V-415V	NXC-330/N AC/DC 380V-415V	836553
330A	3NO	2NO+2NC	AC/DC 220V-240V	NXC-330/N AC/DC 220V-240V	836554
330A	3NO	2NO+2NC	AC/DC 110V-127V	NXC-330/N AC/DC 110V-127V	836555
400A	3NO	2NO+2NC	AC/DC 380V-415V	NXC-400 AC/DC 380V-415V	836547
400A	3NO	2NO+2NC	AC/DC 220V-240V	NXC-400 AC/DC 220V-240V	836548
400A	3NO	2NO+2NC	AC/DC 110V-127V	NXC-400 AC/DC 110V-127V	836549
400A	3NO	2NO+2NC	AC/DC 380V-415V	NXC-400/N AC/DC 380V-415V	836556
400A	3NO	2NO+2NC	AC/DC 220V-240V	NXC-400/N AC/DC 220V-240V	836557
400A	3NO	2NO+2NC	AC/DC 110V-127V	NXC-400/N AC/DC 110V-127V	836558
500A	3NO	2NO+2NC	AC/DC 380V-415V	NXC-500 AC/DC 380V-415V	836559
500A	3NO	2NO+2NC	AC/DC 220V-240V	NXC-500 AC/DC 220V-240V	836560
500A	3NO	2NO+2NC	AC/DC 110V-127V	NXC-500 AC/DC 110V-127V	836561
500A	3NO	2NO+2NC	AC/DC 380V-415V	NXC-500/N AC/DC 380V-415V	836565
500A	3NO	2NO+2NC	AC/DC 220V-240V	NXC-500/N AC/DC 220V-240V	836566
500A	3NO	2NO+2NC	AC/DC 110V-127V	NXC-500/N AC/DC 110V-127V	836567
630A	3NO	2NO+2NC	AC/DC 380V-415V	NXC-630 AC/DC 380V-415V	836562
630A	3NO	2NO+2NC	AC/DC 220V-240V	NXC-630 AC/DC 220V-240V	836563
630A	3NO	2NO+2NC	AC/DC 110V-127V	NXC-630 AC/DC 110V-127V	836564
630A	3NO	2NO+2NC	AC/DC 380V-415V	NXC-630/N AC/DC 380V-415V	836568
630A	3NO	2NO+2NC	AC/DC 220V-240V	NXC-630/N AC/DC 220V-240V	836569
630A	3NO	2NO+2NC	AC/DC 110V-127V	NXC-630/N AC/DC 110V-127V	836570

AC-3 Current	Main Contacts	Auxiliary Contacts	Coil	Model Description	Code
-	-	2NO+2NC	-	AX-3X/22	938251
-	-	3NO+1NC	-	AX-3X/31	938252
-	-	1NO+3NC	-	AX-3X/13	938253
-	-	4NO	-	AX-3X/40	938254
-	-	4NC	-	AX-3X/04	938255
-	-	1NO+1NC	-	AX-3X/11	938256
-	-	2NC	-	AX-3X/02	938257
-	-	2NO	-	AX-3X/20	938258
-	-	4NO	-	AX-3M/40	925184
-	-	3NO+1NC	-	AX-3M/31	925185
-	-	2NO+2NC	-	AX-3M/22	925186
-	-	1NO+3NC	-	AX-3M/13	925187
-	-	4NC	-	AX-3M/04	925188
-	-	2NO	-	AX-3M/20	925189
-	-	1NO+1NC	-	AX-3M/11	925190
-	-	2NC	-	AX-3M/02	925191
-	-	1NO+1NC	-	AX-3C/11	938259
-	-	1NO+1NC	-	AX-3C/11B	253591